



Beauty
W A T E R

广州北沃环保科技有限公司

Guangzhou Beauty Water Eco-Technologies Co.,Ltd

佛山市北沃水处理设备制造有限公司

Foshan Beauty Water Pool Equipments Manufacturing Co.,Ltd

www.gzbeautywater.com

品质 Quality

创新 Innovation

专业 Professionalism

诚信 Honesty

责任 Responsibility

感恩 Gratitude



目录

Contents

01	公司简介.....03-04
----	----------------

Company Profile

02	过滤沙缸.....05-38
----	----------------

Sand Filters

03	水泵.....39-74
----	--------------

Pumps

04	泳池水质智能管家.....75-76
----	--------------------

Pool Intelligent Management Systems

05	水下灯.....77-98
----	---------------

Underwater Lights

06	扶梯.....99-100
----	---------------

Pool Ladders

07	投药器.....101-102
----	-----------------

Chemical Feeders

08	泳池配件、清洁用品...103-110
----	---------------------

Pool Fittings & Cleaners



ABOUT US 企业简介

北沃品牌成立于2017年，旗下包括香港北沃集团有限公司、广州北沃环保科技有限公司和佛山市北沃水处理设备制造有限公司。公司专注于泳池、桑拿、水上乐园、海洋馆等水体循环过滤设备系统的研发、生产和销售。北沃在广东省内规划了70000平方米的工业产业园，并设立了10000平方米的生产厂区，用于生产沙缸、水泵和水下灯等设备。

北沃的联合创始团队拥有23年的行业专业经验，生产和核心技术团队成员平均拥有13年以上的经验，销售团队成员平均拥有8年以上的经验。这些丰富的经验使北沃能够为全球50多个国家和地区的客户提供全系列泳池设备的一站式采购服务。

公司秉承“品质、创新、专业、诚信、责任、感恩”的价值观，致力于成就客户、合作伙伴和员工。北沃将继续深耕行业，力求在未来为客户提供高质量的产品和服务。





The Beauty Water brand was established in 2017 and includes Hong Kong Beauty Water Group Limited, Guangzhou Beauty Water Eco-Technologies Co.,Ltd and Foshan Beauty Water Pool Equipments Manufacturing Co.,Ltd. We specialize in the research, production and sales of water circulation and filtration equipment systems for swimming pools, saunas, water parks and aquariums. We have planned a 70,000 m² industrial park in Guangdong Province, with a 10,000 m² production facility dedicated to manufacturing sand filters, pumps and underwater lights.

Our co-founding team has 23 years of industry expertise, with production and core technical team members averaging over 13 years of experience, and sales team members averaging over 8 years. This extensive experience enables Beauty Water to provide a one-stop purchasing service for a full range of swimming pool equipment to customers in more than 50 countries and regions worldwide.

We always adhere to the values of "Quality, Innovation, Professionalism, Honesty, Responsibility, Gratitude" committed to achieving success for customers, partners and staffs. Beauty Water will continue to deepen its industry expertise, striving to provide high-quality products and services to more customers in the future.

W&WS系列缠绕式玻璃纤维过滤沙缸

W & WS Series Bobbin-wound Fiberglass Filter



W&WS系列缠绕式玻璃纤维过滤沙缸

W&WS Series Bobbin-wound Fiberglass Filter

W&WS系列缠绕式玻璃纤维过滤沙缸由优质的玻璃纤维和树脂制造而成，玻璃纤维缠绕结构使沙缸更加坚固，缸体表面经过防晒处理，具有良好的耐腐蚀性能和防晒功能。

W&WS系列缠绕式玻璃纤维过滤沙缸是泳池、温泉、SPA、海洋馆、水上乐园等水处理设备的首选。

W & WS series bobbin-wound fiberglass top and side mount filter is made of high quality fiberglass and resin, the fiberglass winding structure makes the sand filter more stronger, there's UV-resistant on the surface, the whole filter has good resistance to chemical and sun protection.

W & WS series bobbin-wound fiberglass top and side mount filter is the first choice for water treatment equipment at swimming pools, hot springs, spas, aquariums, water parks & etc.

特点 & 优势 Features & Advantages

沙缸表面经防晒处理	UV-resistant surface finished.
配置六位制功能缸头	Equipped with a 1.5" or 2.0" six-position multiport valve.
接管管口公英制通用	Universal standard of union connection provided.
最大工作压力：36 psi/2.5 bar	Max. working pressure 36 psi/2.5 bar.
最高操作温度：43° C(109° F)	Max. temperature of 43° C(109° F).
硅砂建议规格：0.8–1.2mm	Suggested size of media: 0.8–1.2mm.

过滤沙缸

Sand Filters

www.gzbeautywater.com



W系列缠绕式玻璃纤维顶出过滤沙缸

W Series Bobbin-wound Fiberglass Top Mount Filter



W1.5顶出缸头
Multiport valve W1.5



常规夹箍颈环
Regular: Clamp Type



缸体内部结构
Inside Structure



螺丝式颈环
Optional: Bolt Type




底排水
Under Drain

技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area m ²	进出水口 Port size		砂量 Sand kg
	inch	mm	lpm	m ³ /h		inch	mm	
W400	16"	410	105	6.00	0.13	1.5"	50	30
W450	18"	460	135	8.10	0.16	1.5"	50	45
W550	21"	530	185	11.10	0.22	1.5"	50	85
W650	25"	640	260	15.60	0.32	1.5"	50	145
W700	28"	700	325	19.50	0.40	1.5"	50	210

尺寸 Dimension(mm)

型号 Model	A	B	C	D	E	F
W400	740	590	530	175	410	390
W450	770	610	550	210	460	390
W550	830	720	660	235	530	390
W650	980	820	760	300	640	500
W700	1070	920	860	330	700	500

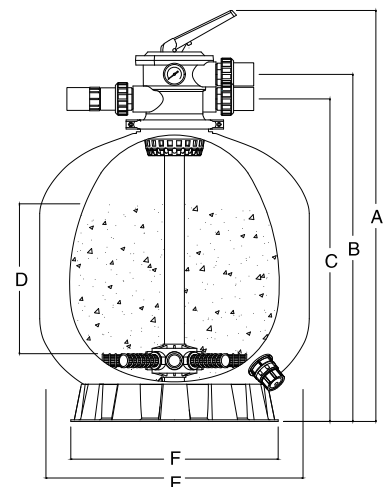

W系列缠绕式玻璃纤维顶出过滤沙缸


WS Series Bobbin-wound Fiberglass Side Mount Filter




W2.0顶出缸头
Multiport valve W2.0



缸体顶部+缸头
Top of Filter Tank
and Multiport Valve



缸体内部结构
Inside Structure



颈环
Neck




底排水
Under Drain

技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area m ²	进出水口 Port size		砂量 Sand kg
	inch	mm	lpm	m ³ /h		inch	mm	
W650B	25"	640	260	15.60	0.32	2"	63	145
W700B	28"	700	336	20.16	0.41	2"	63	215
W750	30"	750	390	23.00	0.44	2"	63	230
W800	32"	800	415	24.90	0.50	2"	63	355
W900	36"	900	520	31.20	0.64	2"	63	470
W1000	40"	1000	650	39.00	0.79	2"	63	620
W1100	44"	1100	700	42.00	0.98	2"	63	700
W1200	48"	1200	860	51.60	1.13	2"	63	860
W1400	56"	1400	950	57.00	1.54	2"	63	1400

尺寸 Dimension(mm)

型号 Model	A	B	C	D	E	F
W650B	980	820	760	300	640	500
W700B	1083	930	870	390	700	500
W750	1150	980	900	430	750	710
W800	1200	1020	950	450	800	710
W900	1310	1160	1080	480	900	710
W1000	1410	1250	1160	580	1000	890
W1100	1500	1330	1250	630	1100	890
W1200	1590	1390	1300	740	1200	890
W1400	1800	1600	1510	850	1400	1200

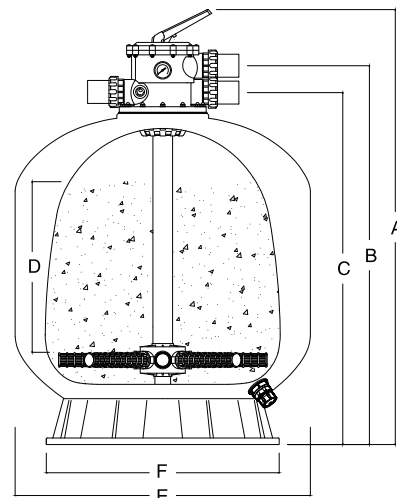

过滤沙缸


Sand Filters

www.gzbeautywater.com



WS系列缠绕式玻璃纤维侧出过滤沙缸

WS Series Bobbin-wound Fiberglass Side Mount Filter

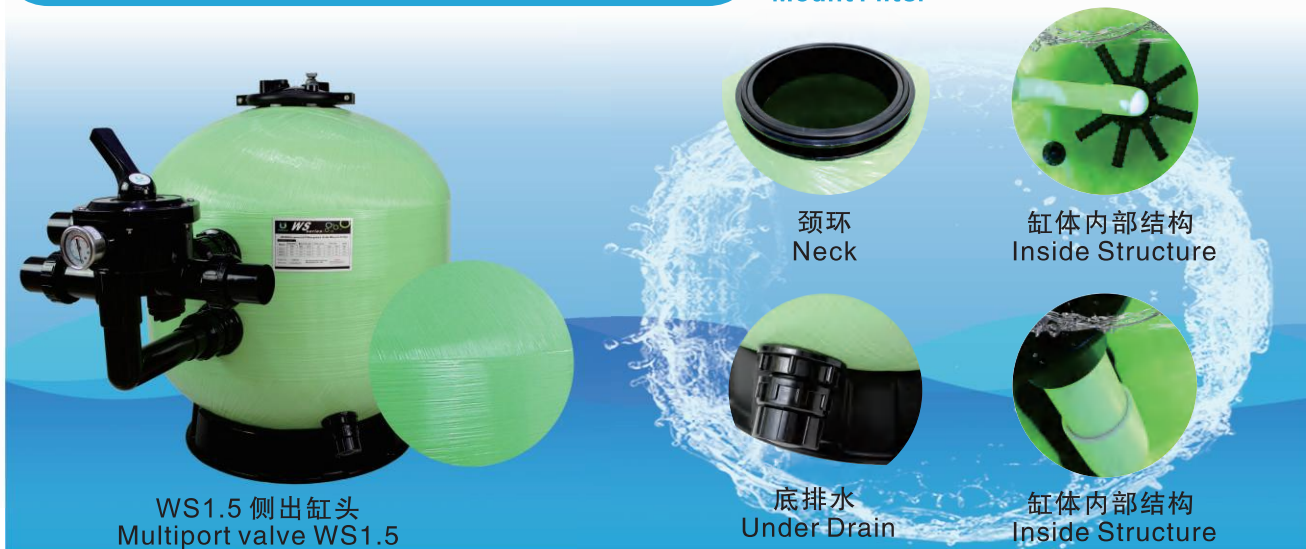


技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand
	inch	mm	lpm	m ³ /h		inch	mm	
WS550	21"	530	185	11.10	0.22	1.5"	50	85
WS650	25"	640	260	15.60	0.32	1.5"	50	145
WS700	28"	700	325	19.50	0.40	1.5"	50	210

尺寸 Dimension(mm)

型号 Model	A	B	C	D	E	F	G
WS550	390	450	640	235	530	390	125
WS650	450	510	750	300	640	500	125
WS700	490	560	850	330	700	500	125

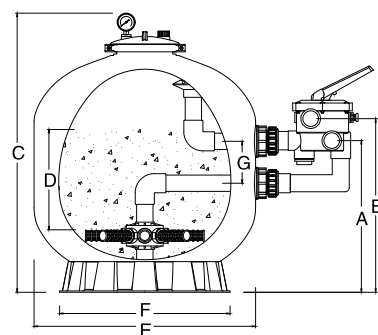

WS系列缠绕式玻璃纤维侧出过滤沙缸

WS Series Bobbin-wound Fiberglass Side Mount Filter




技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area m ²	进出水口 Port size		砂量 Sand kg
	inch	mm	lpm	m ³ /h		inch	mm	
WS700B	28"	700	336	20.16	0.41	2"	63	215
WS750	30"	750	390	23.00	0.44	2"	63	250
WS800	32"	800	435	24.10	0.53	2"	63	355
WS900	36"	900	495	29.70	0.66	2"	63	470
WS1000	40"	1000	670	40.20	0.82	2"	63	620
WS1100	44"	1100	700	42.00	0.98	2"	63	700
WS1200	48"	1200	880	52.80	1.17	2"	63	860
WS1400	56"	1400	950	57.00	1.54	2"	63	1400

尺寸 Dimension(mm)

型号 Model	A	B	C	D	E	F	G
WS700B	520	610	850	390	700	500	220
WS750	540	620	920	407	750	710	220
WS800	570	650	980	425	800	710	220
WS900	640	730	1110	480	900	710	220
WS1000	700	770	1190	580	1000	710	220
WS1100	740	820	1290	680	1100	890	220
WS1200	780	860	1380	740	1200	890	220
WS1400	820	900	1590	800	1400	1200	220

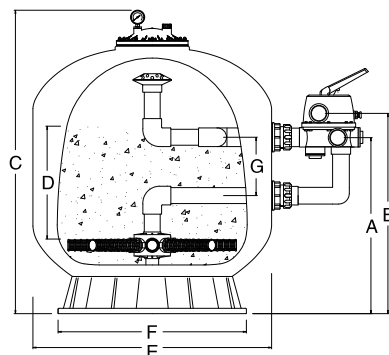

L&LS系列玻璃纤维增强聚酯树脂过滤沙缸

L & LS Series Laminated Fiberglass Filter



L&LS系列玻璃纤维增强聚酯树脂过滤沙缸

L & LS Series Laminated Fiberglass Filter

L&LS系列玻璃纤维增强聚酯树脂过滤沙缸，耐用、耐腐蚀、凝胶衣涂层的光面设计，使外观光滑和美观，广受市场喜欢。

此系列沙缸是高端别墅和酒店泳池、高级水疗会所和疗养池、浴池和鱼池的最佳选择。

L & LS series laminated fiberglass top and side mount filter is durable, corrosion-resistant, glossy finished in gel coats for a smooth and beautiful exterior, which is popular in the market. This collection of sand filters is the perfect choice for high-end villas and hotel pools, high-class spas and wellness pools, baths, fish ponds & etc.

特点 & 优势 Features & Advantages

无腐蚀性胶衣涂层玻璃纤维缸身	Non corrosive gel coat fiberglass tank, smooth finished.
配置六位制功能缸头	Equipped with a 1.5" or 2.0" six-position multiport valve.
接管管口公英制通用	Universal standard of union connection provided.
最大工作压力：36 psi/2.5 bar	Max. working pressure 36 psi/2.5 bar.
最高操作温度：43° C(109° F)	Max. temperature of 43° C(109° F).
硅砂建议规格：0.8–1.2mm	Suggested size of media: 0.8–1.2mm.

过滤沙缸

Sand Filters

www.gzbeautywater.com



L系列玻璃纤维增强聚酯树脂顶出过滤沙缸

L Series Laminated Fiberglass Top Mount Filter




技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand
	inch	mm	lpm	m ³ /h	m ²	inch	mm	kg
L550	21"	530	167	10.00	0.20	1.5"	50	88
L650	25"	640	275	16.50	0.33	1.5"	50	158

尺寸 Dimension(mm)

型号 Model	A	B	C	D	E	S
L550	886	750	690	390	530	286
L650	1000	850	790	500	640	318

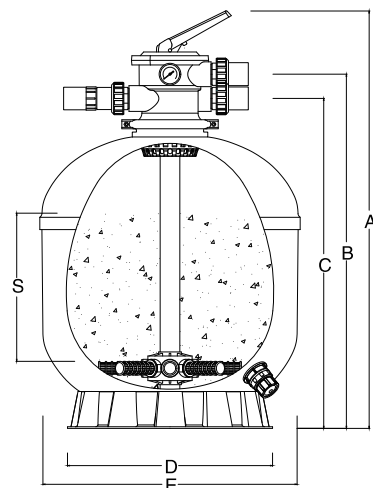

L系列玻璃纤维增强聚酯树脂顶出过滤沙缸

L Series Laminated Fiberglass Top Mount Filter




技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand
	inch	mm	lpm	m ³ /h		inch	mm	
L750	30"	750	366	22.00	0.44	2"	63	260
L800	32"	800	420	25.00	0.50	2"	63	350
L900	36"	900	533	32.00	0.64	2"	63	422

尺寸 Dimension(mm)

型号 Model	A	B	C	D	E	S
L750	1170	1005	920	710	750	430
L800	1200	1030	950	710	800	450
L900	1295	1160	1080	710	900	480

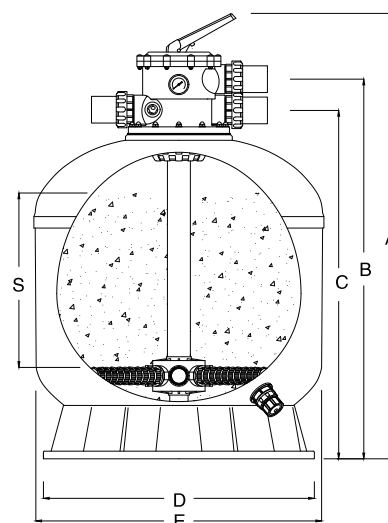

过滤沙缸

Sand Filters

www.gzbeautywater.com




LS系列玻璃纤维增强聚酯树脂侧出过滤沙缸

LS Series Laminated Fiberglass Side Mount Filter



WS1.5 侧出缸头
Multiport valve WS1.5




颈环
Neck



缸体内部结构
Inside Structure



底排水
Under Drain




缸体内部结构
Inside Structure

技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand
	inch	mm	lpm	m ³ /h	m ²	inch	mm	kg
LS550	21"	530	167	10.00	0.20	1.5"	50	100
LS650	25"	640	275	16.50	0.33	1.5"	50	150

尺寸 Dimension(mm)

型号 Model	A	B	C	D	E	F	G	S
LS550	835	635	390	530	485	425	300	235
LS650	900	680	500	640	505	445	320	300

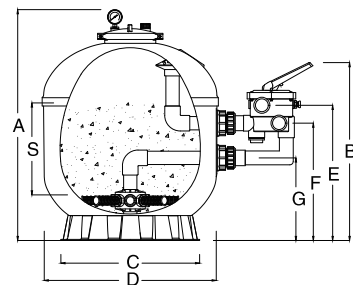

LS系列玻璃纤维增强聚酯树脂侧出过滤沙缸

LS Series Laminated Fiberglass Side Mount Filter




技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand
	inch	mm	lpm	m ³ /h		inch	mm	
LS750	30"	750	366	22.10	0.44	2"	63	250
LS800	32"	800	420	25.00	0.50	2"	63	300
LS900	36"	900	531	31.80	0.64	2"	63	375

尺寸 Dimension(mm)

型号 Model	A	B	C	D	E	F	G	S
LS750	950	750	710	750	657	570	350	407
LS800	1005	785	710	800	667	580	360	425
LS900	1110	850	710	900	712	625	405	480

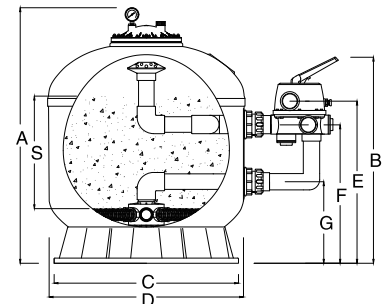

WSH&WSY&LSH系列深层侧出过滤沙缸

WSH & WSY & LSH Series Fiberglass Deep Bed Side Mount Filter



WSH&WSY&LSH系列深层侧出过滤沙缸

WSH & WSY & LSH Series Fiberglass Deep Bed Side Mount Filter

WSH & WSY & LSH系列沙缸具有一个较深的过滤层，从而达到更多的过滤效果。缸体表面经过防晒处理，具有良好的耐化学腐蚀性能和防晒功能。

WSH & WSY玻璃纤维深层侧出过滤沙缸由优质的玻璃纤维和树脂制造而成，玻璃纤维缠绕结构使沙缸更加坚固。LSH系列玻璃纤维增强聚酯树脂深层侧出过滤沙缸，耐用、耐腐蚀、凝胶衣涂层的光面设计，使外观光滑和美观，广受市场喜欢。

WSH & WSY & LSH series has a deep bed layer, so that to achieve a better filtering effect. There's UV-resistant on the surface, the whole filter has good resistance to chemical and sun protection.

WSH & WSY series fiberglass deep bed side mount filter is made of high quality fiberglass and resin, the fiberglass winding structure makes the sand filter more stronger. LSH series laminated fiberglass deep bed side mount filter is durable, corrosion-resistant, glossy finished in gel coats for a smooth and beautiful exterior, which is popular in the market.

特点 & 优势 Features & Advantages

WSH&WSY系列： 沙缸表面经防晒处理	WSH & WSY series: UV-resistant surface finished.
LSH系列： 无腐蚀性胶衣涂层玻璃纤维缸身	LSH series: Non corrosive gel coat fiberglass tank, smooth finished.
配置六位制功能缸头(接管管口公英制通用)	Equipped with a 2.0" six-position multiport valve(Universal standard of union connection provided).
最大工作压力：36 psi/2.5 bar	Max. working pressure 36 psi/2.5 bar.
最高操作温度：43° C(109° F)	Max. temperature of 43° C(109° F).
硅砂建议规格：0.8–1.2mm	Suggested size of media: 0.8–1.2mm.


过滤沙缸 Sand Filters

www.gzbeautywater.com



WSH系列缠绕式玻璃纤维深层侧出过滤沙缸

WSH Series Bobbin-wound Fiberglass Deep Bed Side Mount Filter

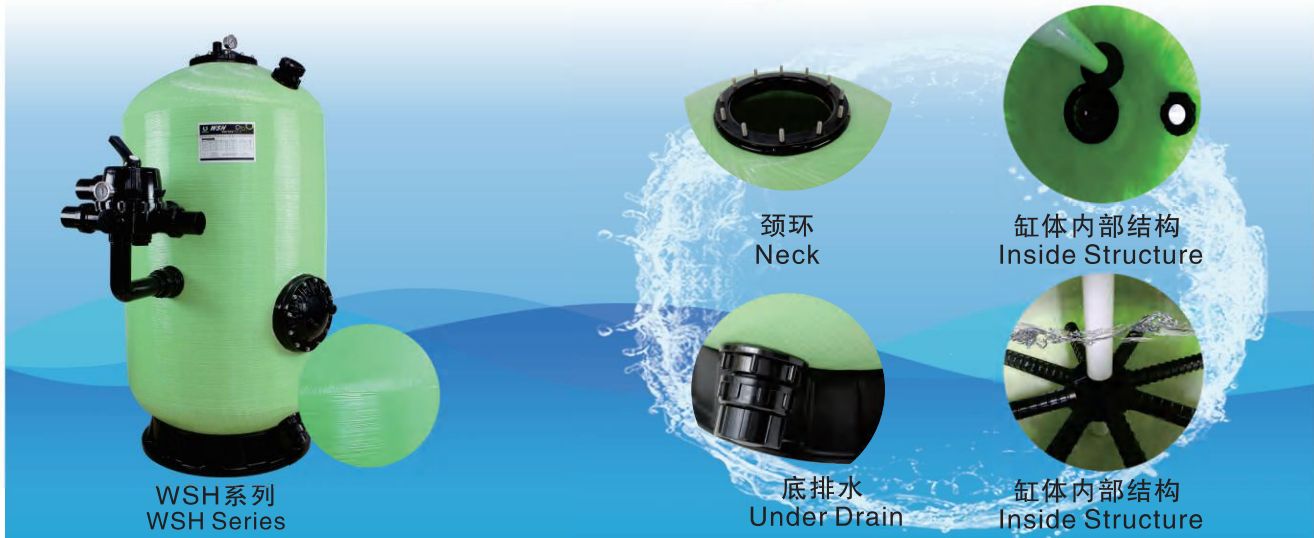


技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand
	inch	mm	lpm	m ³ /h		inch	mm	
WSH700B	28"	700	253	15.20	0.38	2"	63	420
WSH800	32"	800	333	20.00	0.50	2"	63	695
WSH900	36"	900	420	25.20	0.63	2"	63	920
WSH1000	40"	1000	520	31.20	0.78	2"	63	1200
WSH1200	48"	1200	753	45.20	1.13	2"	63	1650

尺寸 Dimension(mm)

型号 Model	H1	H2	D	B	S	T	A	C	E	F
WSH700B	1600	1530	700	500	785	315	895	675	600	1400
WSH800	1600	1530	800	710	785	315	895	675	600	1400
WSH900	1600	1530	900	710	785	315	895	675	600	1400
WSH1000	1600	1530	1000	890	785	315	895	675	600	1400
WSH1200	1600	1530	1200	890	785	315	895	675	600	1400

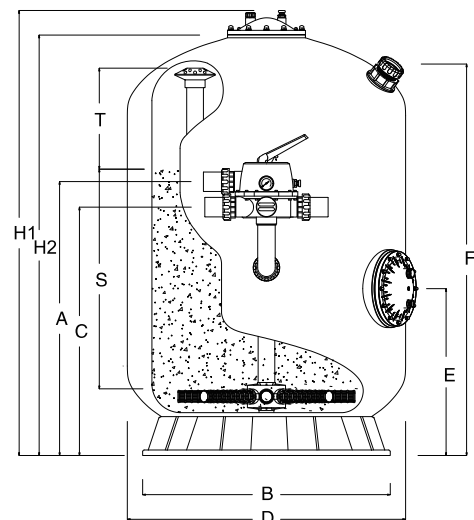

WSY系列缠绕式玻璃纤维深层侧出过滤沙缸

WSY Series Bobbin-wound Fiberglass Deep Bed Side Mount Filter




技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand
	inch	mm	lpm	m ³ /h		inch	mm	
WSY700B	28"	700	336	20.16	0.41	2.5"	75	420
WSY800	32"	800	435	24.10	0.53	2.5"	75	695
WSY900	36"	900	495	29.70	0.66	2.5"	75	920
WSY1000	40"	1000	670	40.20	0.82	2.5"	75	1200
WSY1200	48"	1200	800	48.00	1.13	2.5"	75	1650

尺寸 Dimension(mm)

型号 Model	H	H1	H2	D	B	S	T	A	C	E	F
WSY700B	1665	1600	1530	700	500	785	315	980	620	600	1430
WSY800	1665	1600	1530	800	710	785	315	980	620	600	1430
WSY900	1665	1600	1530	900	710	785	315	980	620	600	1430
WSY1000	1665	1600	1530	1000	890	785	315	980	620	600	1430
WSY1200	1665	1600	1530	1200	890	785	315	980	620	600	1430

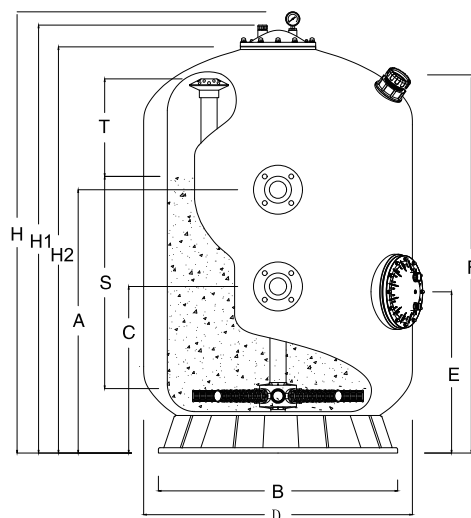

过滤沙缸

Sand Filters

www.gzbeautywater.com



LSH系列纤维增强聚酯树脂深层侧出过滤沙缸

LSH Series Laminated Fiberglass Deep Bed Side Mount Filter




技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand
	inch	mm	lpm	m³/h		inch	mm	
LSH700B	28"	700	253	15.20	0.38	2"	63	420
LSH800	32"	800	333	20.00	0.50	2"	63	695
LSH900	36"	900	420	25.20	0.63	2"	63	920
LSH1000	40"	1000	520	31.20	0.78	2"	63	1200
LSH1200	48"	1200	753	45.20	1.13	2"	63	1650

尺寸 Dimension(mm)

型号 Model	H1	H2	D	B	S	T	A	C	E
LSH700B	1600	1530	700	700	785	315	950	730	520
LSH800	1600	1530	800	800	785	315	950	730	520
LSH900	1600	1530	900	900	785	315	950	730	520
LSH1000	1600	1530	1000	1000	785	315	950	730	520
LSH1200	1600	1530	1200	1200	785	315	950	730	520

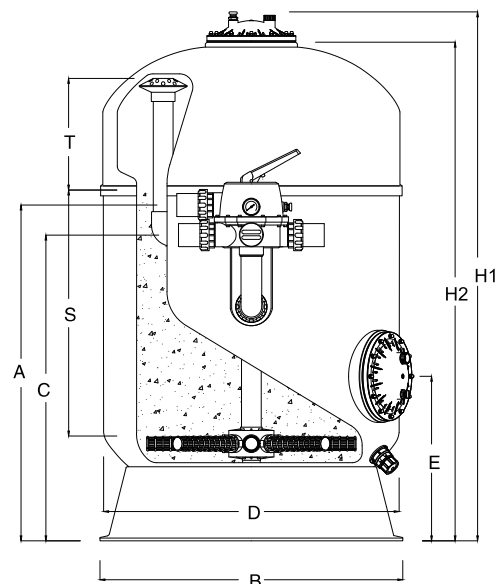

CY系列缠绕式玻璃纤维臭氧反应罐

CY Series Bobbin-wound Fiberglass Ozone Reaction Tank



技术参数 Specification

型号 Model	罐体直径 Tank Dia.	罐体高度 Height	进出水口 Port size	
	mm	mm	inch	mm
CY700B	700	1600	2.5"	75
CY800	800	1600	2.5"	75
CY900	900	1600	2.5"	75
CY1000	1000	1600	2.5"	75
CY1200	1200	1460	3"	90
CY1400	1400	1620	4"	110
CY1600	1600	1830	4"	110
CY1800	1800	2040	6"	160
CY2000	2000	2350	6"	160

C&D系列大型商用玻璃纤维过滤沙缸

C & D Series Fiberglass Commercial Sand Filter



C&D系列缠绕式玻璃纤维大型商用过滤沙缸

C&D Series Bobbin-wound Fiberglass Commercial Filter

C和D系列大型商用玻璃纤维过滤沙缸由优质的玻璃纤维和树脂制造而成，玻璃纤维缠绕结构使沙缸更加坚固，缸体表面经过防晒处理，具有良好的耐化学腐蚀性能和防晒功能。

大型商用玻璃纤维过滤沙缸款式特别，能满足大面积的过滤，适用于大型水景、大型商用泳池、泳池、海洋馆、水上乐园等水处理设备。

C and D Series fiberglass commercial filter is made of high quality fiberglass and resin, the fiberglass winding structure makes the sand filter more stronger, there' s UV-resistant on the surface, the whole filter has good resistance to chemical and sun protection.

The C and D series commercial fiberglass sand filter is worked for for water treatment equipment at large scale water features, commercial pools, aquariums, water parks & etc.

特点 & 优势 Features & Advantages

沙缸表面经防晒处理	UV-resistant surface finished.
法兰进出水口设计，用于蝶阀安装	Designed to assemble with butterfly valve.
最大工作压力36 psi(2.5 bar)或 58 psi(4.0 bar)可选	Max. operating pressure 36 psi(2.5 bar) or 58 psi(4.0 bar) is optional.
最高操作温度：43° C(109° F)	Max. temperature of 43° C(109° F).
硅砂：0.8–1.2mm, 砂砾：1–2mm	Suggested size of media: 0.8–1.2mm sand and 1–2mm gravel.
可选配： 过滤管：标准过滤管/ 蘑菇头过滤板 其 他：窥镜/人孔	Optional accessories: Filtration system: Laterals/Nozzles. Others:Sight glass/Manhole.


过滤沙缸 Sand Filters

www.gzbeautywater.com



C系列大型商用玻璃纤维过滤沙缸

C Series Bobbin-wound Fiberglass Commercial Sand Filter

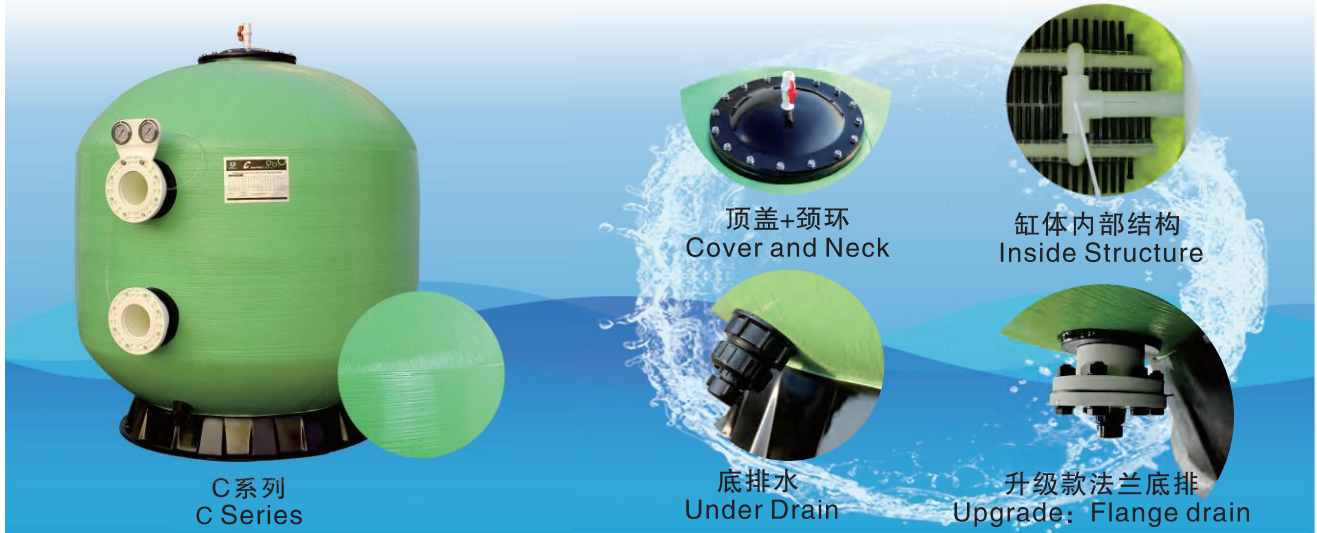


技术参数 Specification

型号 Model	罐体直径 Tank Dia.	流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand	
	mm	lpm	m ³ /h	m ²	inch	mm	0.8-1.2mm	1-2mm
C1200	1200	860	52	1.13	3"	90	900	300
C1400	1400	1150	69	1.54	4"	110	1350	450
C1600	1600	1500	80	2.00	4"	110	2300	700
C1800	1800	2000	125	2.70	6"	160	2900	900
C2000	2000	2350	157	3.14	6"	160	4000	1100
C2300	2300	3440	217	4.30	8"	200	6000	1600
C2500	2500	3920	250	4.90	10"	250	6700	1800
C3000	3000	5883	353	7.07	10"	250	13000	2300

尺寸 Dimension(mm)

型号 Model	H	H1	H2	D	B	S	T	A	C
C1200	1460	1350	1270	1200	890	590	236	790	430
C1400	1620	1510	1430	1400	1200	725	290	970	500
C1600	1830	1720	1640	1600	1200	730	292	1100	630
C1800	2040	1930	1850	1800	1380	910	364	1240	680
C2000	2350	2240	2160	2000	1660	1082	433	1390	830
C2300	2520	2410	2330	2300	2000	1232	493	1490	930
C2500	2760	2650	2570	2500	2000	1446	579	1590	1030
C3000	3300	3190	3110	3000	2500	1860	744	1880	1320

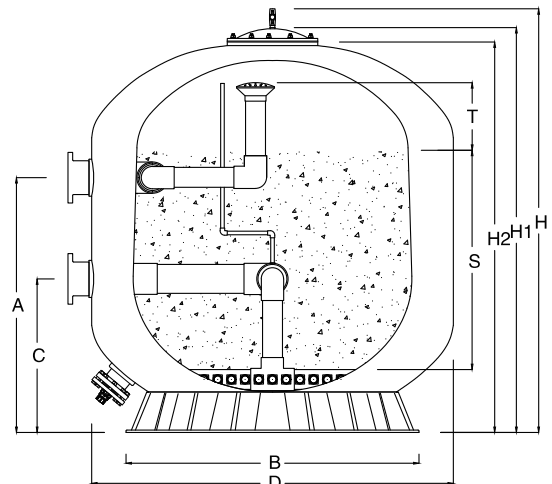

D系列大型卧式玻璃纤维过滤沙缸

D Series Bobbin-wound Fiberglass Horizontal Commercial Filter




技术参数 Specification

型号 Model	流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand	
	lpm	m ³ /h		inch	mm	0.8-1.2mm	1-2mm
D1400-2.5	1517	91	3.10	6"	160	2845	800
D1400-3.0	1883	110	3.80	6"	160	3450	1000
D1400-4.0	2250	135	4.60	6"	160	4800	1310
D1400-5.0	2583	155	5.30	6"	160	5800	1716
D1600-2.5	1685	101	3.50	6"	160	3875	850
D1600-3.0	2960	178	4.30	6"	160	4750	1050
D1600-4.0	4350	261	5.10	8"	200	6270	1386
D1600-5.0	5625	338	5.90	8"	200	8276	1830

尺寸 Dimension(mm)

型号 Model	A	B	C
D1400-2.5	1700	1400	2500
D1400-3.0	1700	1400	3000
D1400-4.0	1700	1400	4000
D1400-5.0	1700	1400	5000
D1600-2.5	1900	1600	2500
D1600-3.0	1900	1600	3000
D1600-4.0	1900	1600	4000
D1600-5.0	1900	1600	5000

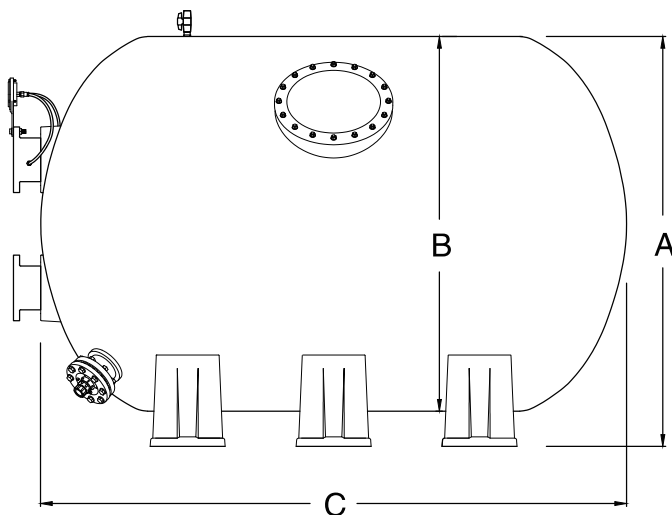

过滤沙缸

Sand Filters

www.gzbeautywater.com



D系列大型卧式玻璃纤维过滤沙缸

D Series Bobbin-wound Fiberglass Horizontal Commercial Filter




技术参数 Specification

型号 Model	流量 Max flow rate		过滤面积 Filter area m ²	进出水口 Port size		砂量 Sand	
	lpm	m ³ /h		inch	mm	0.8-1.2mm	1-2mm
D1800-2.5	1867	112	3.70	6"	160	4850	975
D1800-3.0	2283	137	4.60	6"	160	5925	1225
D1800-3.5	2700	162	5.40	8"	200	7000	1475
D1800-4.0	3117	187	6.30	8"	200	8075	1700
D2000-2.5	2167	130	4.30	6"	160	6575	1050
D2000-3.0	2650	159	5.30	6"	160	8025	1300
D2000-3.5	3117	187	6.30	8"	200	9475	1550
D2000-4.0	3600	216	7.20	8"	200	10925	1800
D2000-4.5	5433	325	8.20	8"	200	12375	2075

尺寸 Dimension(mm)

型号 Model	A	B	C
D1800-2.5	2100	1800	2500
D1800-3.0	2100	1800	3000
D1800-3.5	2100	1800	3500
D1800-4.0	2100	1800	4000
D2000-2.5	2300	2000	2500
D2000-3.0	2300	2000	3000
D2000-3.5	2300	2000	3500
D2000-4.0	2300	2000	4000
D2000-4.5	2300	2000	4500

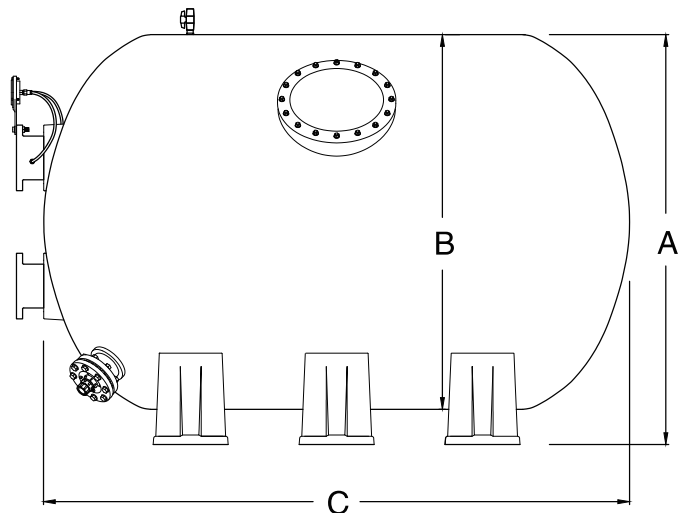

D系列大型卧式玻璃纤维过滤沙缸


D Series Bobbin-wound Fiberglass Horizontal Commercial Filter



D系列
D Series



法兰
Flange



人孔
Manhole



底排水
Under Drain




升级款法兰底排
Upgrade: Flange drain

技术参数 Specification

型号 Model	流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand	
	lpm	m ³ /h		inch	mm	0.8-1.2mm	1-2mm
D2300-3.0	2970	178	5.94	8"	200	8400	2600
D2300-3.5	3530	212	7.06	8"	200	9800	3050
D2300-4.0	4085	245	8.14	10"	250	11200	3450
D2300-4.5	4640	278	9.28	10"	250	12600	3900
D2300-5.0	5200	312	10.40	10"	250	14000	4350
D2500-3.5	3717	223	7.30	8"	200	11675	3175
D2500-4.0	5750	345	8.50	10"	250	13500	3725
D2500-4.5	6533	392	9.80	10"	250	15350	4300
D2500-5.0	7317	429	10.90	10"	250	17200	4850

尺寸 Dimension(mm)

型号 Model	A	B	C
D2300-3.0	2600	2300	3000
D2300-3.5	2600	2300	3500
D2300-4.0	2600	2300	4000
D2300-4.5	2600	2300	4500
D2300-5.0	2600	2300	5000
D2500-3.5	2800	2500	3500
D2500-4.0	2800	2500	4000
D2500-4.5	2800	2500	4500
D2500-5.0	2800	2500	5000

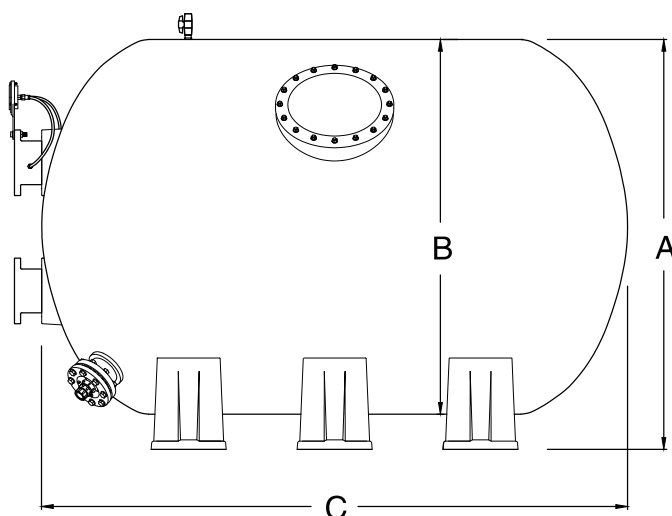

FS, WBS & WBL系列一体化过滤系统

FS, WBS and WBL Series Filtration System



FS, WBS & WBL系列一体化过滤系统

FS, WBS and WBL Series Filtration System

FS, WBS & WBL系列一体化过滤系统，将过滤器、水泵结合为一体，简单、轻便、易安装、体积小、占用面积小，适用于中小型泳池、移动池、按摩池、婴儿浴池等。

FS, WBS and WBL Series filtration system combines filter and water pump into one set equipment, which makes the equipment simple, light and easy to install. It is suitable for small and medium-sized swimming pools, mobile pools, massage pools, baby baths & etc.

特点 & 优势 Features & Advantages

一体化专业设计,便于安装	Easy installation with pre-installed plumbing system and base.
沙缸表面经防晒处理	Filter structure with UV resistance material.
6位制式功能缸头	Simple operation with six-way multiport valve.
最大工作压力: 36 psi/2.5 bar	Max. working pressure 36 psi/2.5 bar.
最高操作温度:43° C(109° F)	Max.temperature of 43° C(109° F).
硅砂建议规格: 0.8-1.2mm	Suggested size of media: 0.8-1.2mm.

过滤沙缸

Sand Filters

www.gzbeautywater.com



FS系列一体化过滤系统

FS Series Filtration System




技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		过滤面积 Filter area	进出水口 Port size		砂量 Sand	匹配水泵 Matching Pump	
	inch	mm	lpm	m³/h	m²	inch	mm	kg	HP	KW
FS450	18"	460	135	8.10	0.16	1.5"	50	45	0.75	0.56
FS550	21"	530	185	11.10	0.22	1.5"	50	85	1.00	0.75
FS650	25"	640	260	15.60	0.32	1.5"	50	145	1.50	1.10


尺寸 Dimension(mm)

型号 Model	A	B	C
FS450	770	750	460
FS550	830	850	530
FS650	980	850	640

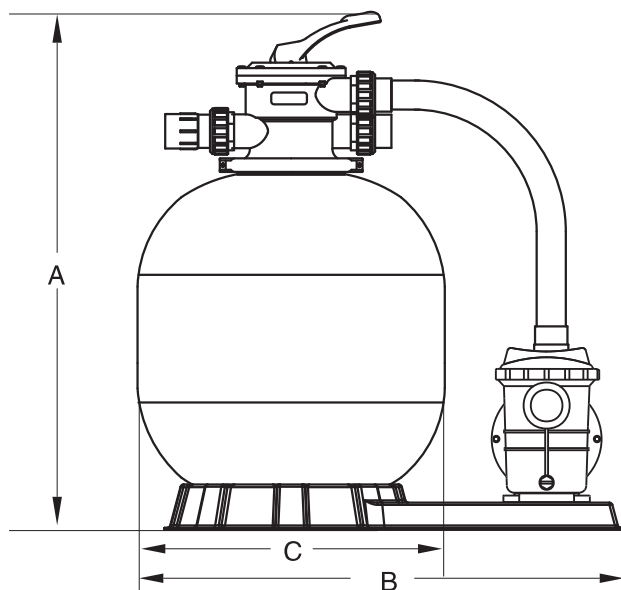

WBS&WBL地埋箱

WBS & WBL Series Under-ground Integrated Filtration System

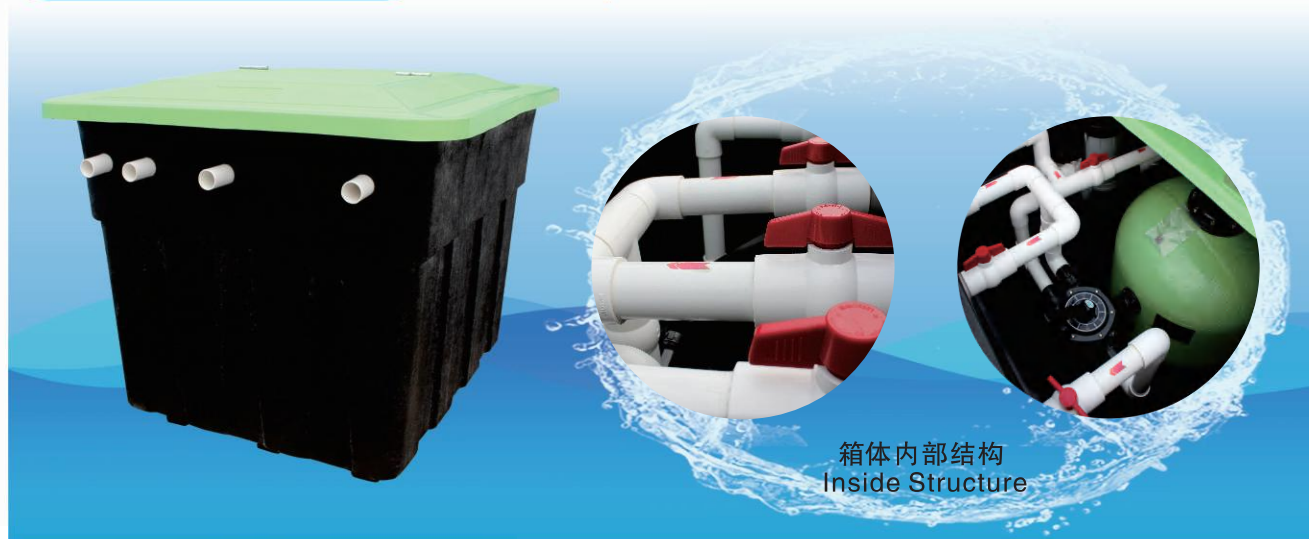


技术参数 Specification

型号 Model	罐体直径 Tank Dia.		流量 Max flow rate		匹配沙缸 Matching filter	匹配水泵 Matching pump		进出水口 Port size		砂量 Sand
	inch	mm	lpm	m ³ /h		HP	KW	inch	mm	
WBS-550	21"	530	185	11.10	Φ550,1.5"Valve	1.00	0.75	1.5"	50	85
WBS-650	25"	640	260	15.60	Φ650,1.5"Valve	1.50	1.10	1.5"	50	145
WBS-700	28"	700	325	19.50	Φ700,1.5"Valve	1.50	1.10	1.5"	50	210
WBL-800	32"	800	435	24.10	Φ800,2"Valve	2.00	1.50	2"	63	355
WBL-900	36"	900	495	29.70	Φ900,2"Valve	2.00	1.50	2"	63	470

尺寸 Dimension(mm)

型号 Model	长(L)	宽(W)	高(H)
WBS-550	1380	1180	1100
WBS-650	1380	1180	1100
WBS-700	1380	1180	1100
WBL-800	1730	1600	1280
WBL-900	1730	1600	1280

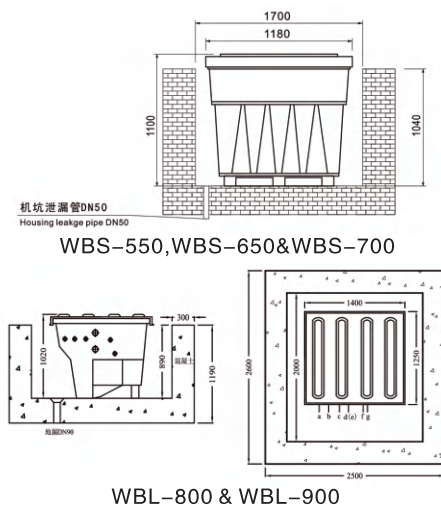

YQ系列纤维增强聚酯树脂增氧锥

YQ Series Laminated Fiberglass Oxygen Cone



增氧锥是采用玻纤加树脂制造而成，凝胶衣涂层的光面设计，使得外观光滑和美观。氧气锥表面经过防晒处理，具有良好的耐化学腐蚀和防晒功能。采用上进下出水的设计，使氧气和水更好地混合，达到增氧的目的。

The oxygen cone is made of high quality fiberglass and resin, reinforced laminated polyester in gel coats design for a smooth and beautiful exterior.

There's UV-resistant on the surface, the whole tank has good resistance to chemical and sun protection. The water is designed to flow in at the top and out at the bottom, makes the oxygen and water fully mixed, so that to achieve the purpose of increasing oxygen.

YQ系列纤维增强聚酯树脂增氧锥

YQ Series Laminated Fiberglass Oxygen Cone




技术参数 Specification

型号 Model	最大流量 Max flow rate	进出水口 Port size		工作压力 Working Pressure	上限温度20℃ Temp 20℃ Oxygen Capacity	溶解氧 D.O
	m ³ /h	inch	mm	psi	kg/hr	mg/l
YQ050	18	2"	63	10	4.5	49
				15	5.3	54
				20	6.1	64
YQ080	30	3"	90	10	4.5	49
				15	5.3	54
				20	6.1	64
YQ100	60	4"	110	10	4.5	50
				15	5.3	57
				20	6.1	65
YQ125	110	5"	140	10	4.5	50
				15	5.3	58
				20	6.1	65
YQ150	140	6"	160	10	4.5	50
				15	5.3	58
				20	6.1	65

尺寸 Dimension(mm)

型号 Model	A	B
YQ050	400	1130
YQ080	700	1730
YQ100	900	2130
YQ125	1000	2720
YQ150	1200	3280

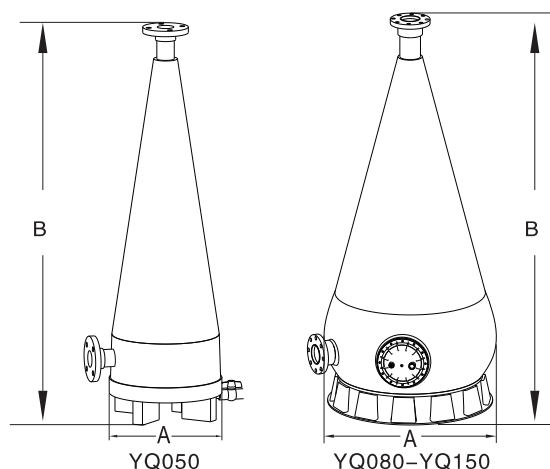

沙缸缸头（六位制操作）

Multiport Valve (Six position)



W1.5



W2.0



S1.5




S2.0




WB1.5

沙缸缸头（六位制操作） Multiport Valve (Six Position)

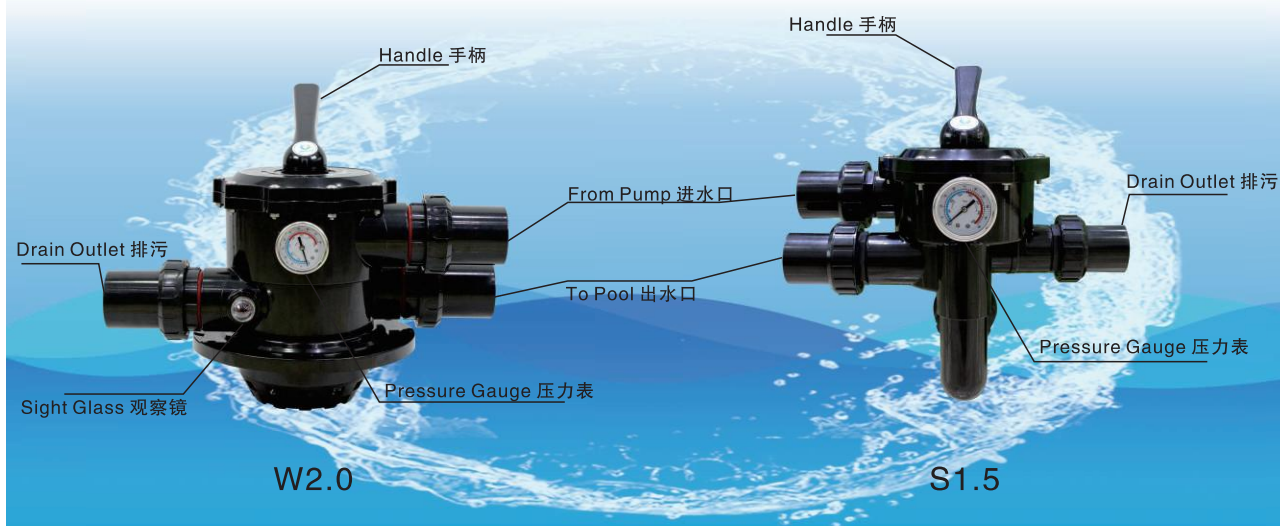


产品尺寸 Size

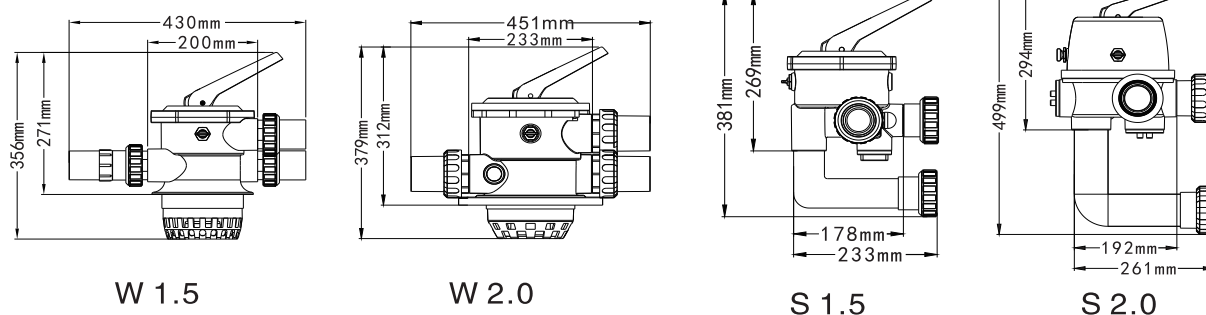


正常过滤	Filter: normal filtration and vacuuming.
反冲洗	Backwash: clean filtration by reversing the flow.
反冲洗后，排出水管内残留污物	Rinse: flush dirt from valve after backwash.
不经过滤直接排水	Waste: by-pass filter, used for vacuuming to waste outlet or lowering water level.
不经过滤循环	Recirculate: by-pass filter for circulating water to pool.
关闭	Closed: close all flow to filter or pool.

六功能阀门分解 Functions:6-Way Multiport Valve

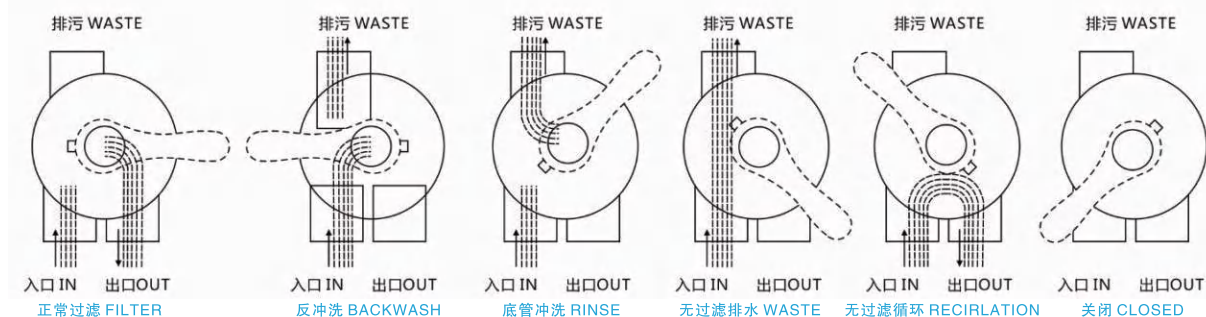

玻璃砂过滤介质

Filter Glass Media

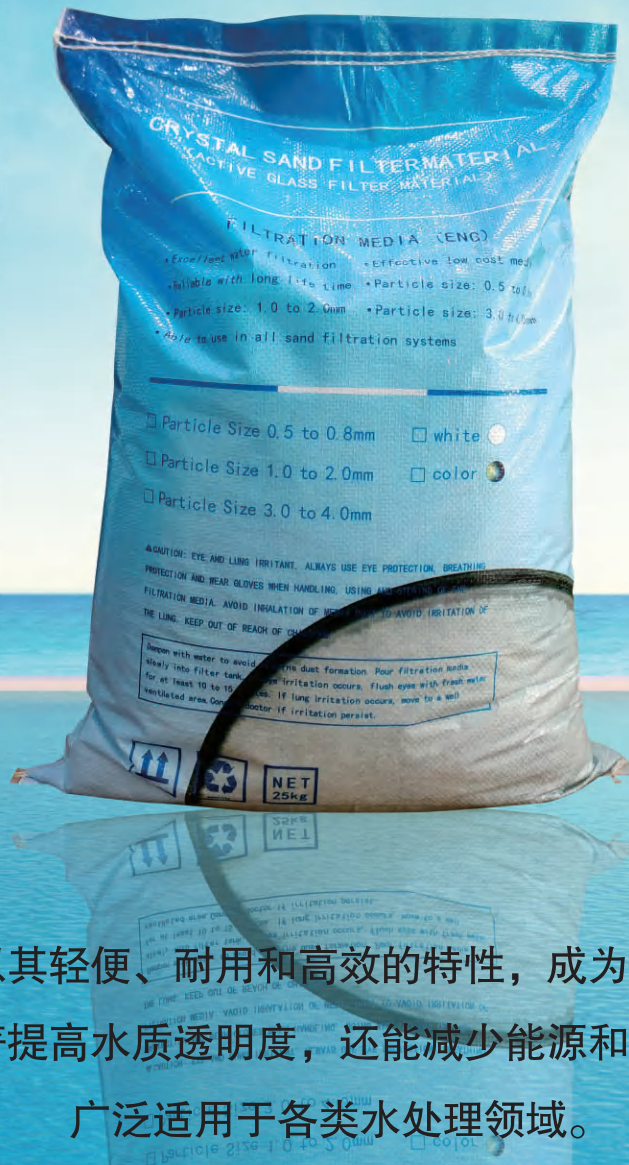

玻璃砂过滤介质以其轻便、耐用和高效的特性，成为硅砂的理想替代品。它不仅显著提高水质透明度，还能减少能源和水资源的消耗，广泛适用于各类水处理领域。

Glass sand filter media is the ideal replacement for silica sand with its lightweight, durable, and efficient features. It significantly improves water clarity, reduces energy and water consumption, and is widely applicable in various water treatment fields.

玻璃砂过滤介质

Filter Glass Media



技术参数 Specification

型号 Model	尺寸&重量 Size & Weight
GS-01	0.5 –0.8mm, white color, 25kg/bag
GS-02	1.0 –2.0mm, white color, 25kg/bag
GS-03	3.0 –4.0mm, white color, 25kg/bag

产品优势 Advantages

1、轻便耐用: 比硅砂更轻, 使用寿命更长。

Lighter and more durable: Lighter than silica sand with a longer lifespan.

2、节省资源: 反冲洗时节省水和电力。

Resource-efficient: Saves water and energy during backwashing.

3、改善水质: 显著提高水质透明度, 去除更细小杂质。

Improves water clarity: Significantly enhances water clarity, removes finer impurities.

4、直接替代硅砂: 成本效益高。

Direct replacement for silica sand: Cost-effective.

5、适用范围广: 适用于游泳池、水上乐园及其他水景、商业饮用水、废水及污水处理。

Versatile applications: Ideal for swimming pools, water parks, water features, commercial potable water, wastewater, and sewage treatment.



过滤水泵

Pumps

产品亮点:

变频泵：通过智能变频技术，我们的变频泵提供卓越的循环率，显著减少能量损耗，实现高速节能。让您在享受高效水流的同时，也能为环境保护贡献一份力量。

塑料水泵：采用高强度塑料制造，坚固耐用，具有极高的扬程和流量优势。其低噪音设计保证了运行的稳定性，让您在享受宁静环境的同时，无需担心设备的干扰。

不锈钢水泵：我们的不锈钢水泵设计精良，泵壳、泵盖、过滤器、转轴和叶轮均采用高品质不锈钢材质，具有极强的耐腐蚀性，确保在各种水质环境中的长期稳定运行。

Features & Advantages:

Variable Frequency Pumps: Our variable frequency pumps, utilizing smart variable frequency technology, providing exceptional circulation rates, significantly reducing energy loss and achieving high-speed energy saving. This allows you to enjoy efficient water flow while also contributing to environmental protection.

Plastic Pumps: Made from reinforced and durable plastic, with high head and high flow advantages. Its low-noise design ensures stable operation, allowing you to enjoy a quiet environment without worrying about equipment disruption.

Stainless Steel Pumps: Expertly designed with high-quality stainless steel case, cover, filter, shaft, and impeller, offering strong corrosion resistance, ensuring long term stable operation in various water quality environments.

SWIM 2 智能变频泵

SWIM 2 Series Variable Frequency Pump




SWIM2-200-VS---SWIM2-400-VS

特点 & 优势 Features & Advantages


- | | |
|--|--|
| <p>① 采用V/F模式控制器，实现单速水泵调速功能；
可选触控按键面板或物理按键面板，设计精简，
操作逻辑简单，安装方向可旋转；</p> <p>② 可选自动模式和手动模式，出厂默认为自动模式；</p> <p>③ 自动模式电泵转速出厂设定:1档:3000rpm,2档:
1400rpm,3档2200rpm.转速可在450~3450rpm
之间通过速度档位键任意设定；</p> <p>④ 在手动模式下用户可自选取段速号运行，并可修
改其转速；</p> <p>⑤ 可外引键盘或通过RS485通讯接口控制电泵启停
(两者只能选择一项)；</p> <p>⑥ 高效节能。</p> | <p>Adopt V/F mode controller to realize the speed control
function; Optional touch key panel or physical key panel,
simple design. simple operation, installation direction can
be rotated.</p> <p>Automatic mode and manual mode are optional. The factory
default is automatic mode.</p> <p>Factory setting of electric pump speed in automatic mode:
speed1:3000rpm,speed2:1400rpm.speed3:2200rpm,and
the speed can be arbitrarily set between450~3450rpm
through the speed gear key.</p> <p>In the manual mode, the user can select the segment
speed number to run and modify its speed.</p> <p>The machine can be started and stopped by external
keyboard or RS485 communication(only one can be
selected).</p> <p>Efficient and energy-saving.</p> |
|--|--|

SWIM 2 智能变频泵 SWIM 2 Series Variable Frequency Pump

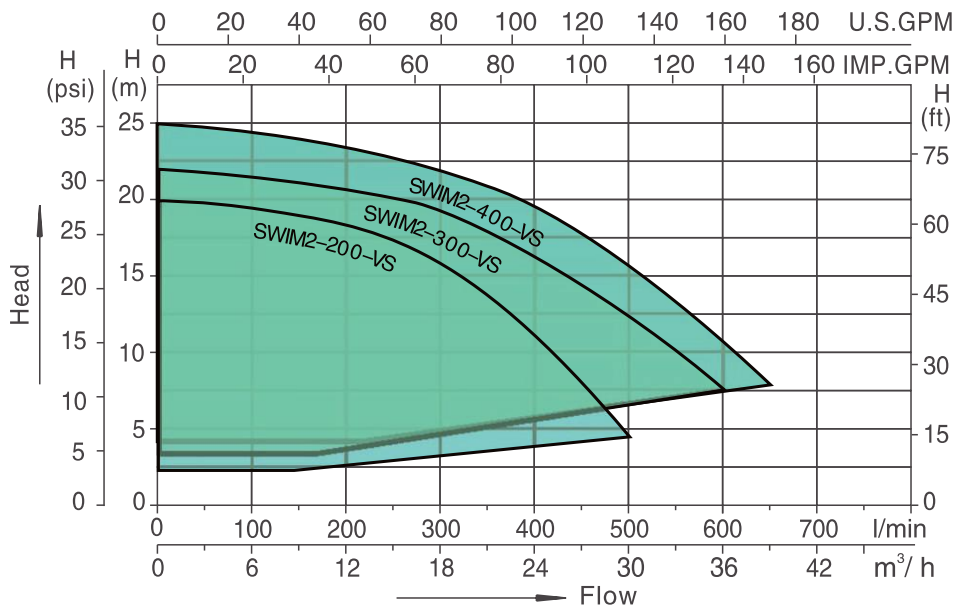

技术参数及产品尺寸 Specification and size

型号 Model	电压 (V)	频率 (Hz)	功率 (THP)	电流 (Amps)	WEF	最大扬程 Hmax.(m)	最大流量 Max.flow rate		转速 Speed (r/min)	L (mm)	H (mm)
							lpm	m³/h			
SWIM2-200-VS	115/208-230	50/60	2.0	13.5/8.3-7.2	9.0	20	500	30	450~3450	603	306
SWIM2-300-VS	230	50/60	3.0	12	8.0	22	600	36	450~3450	603	306
SWIM2-400-VS	230	50/60	4.0	16	7.5	25	650	39	450~3450	640	314

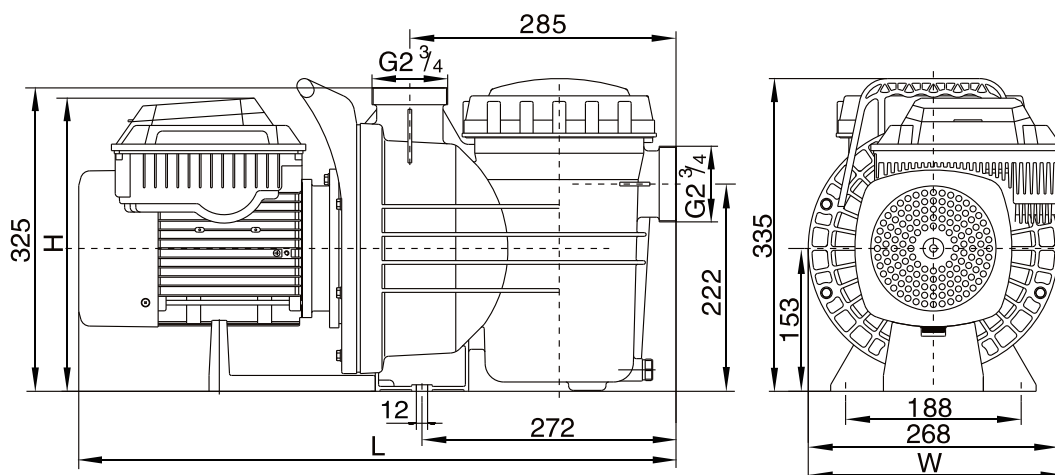

SWP智能变频泵

SWP Series Variable Frequency Pump



SWP390-VS

特点 & 优势 Features & Advantages

- 1 采用V/F模式控制器，实现单速水泵调速功能；
可选触控按键面板或物理按键面板，设计精简，
操作逻辑简单，安装方向可旋转；

Adopt V/F mode controller to realize the speed control function; Optional touch key panel or physical key panel, simple design. simple operation, installation direction can be rotated.
- 2 可选自动模式和手动模式，出厂默认为自动模式；

Automatic mode and manual mode are optional. The factory default is automatic mode.
- 3 自动模式电泵转速出厂设定:1档:3000rpm,2档:1400rpm,3档2200rpm.转速可在450~3450rpm之间通过速度档位键任意设定；

Factory setting of electric pump speed in automatic mode: speed1:3000rpm,speed2:1400rpm.speed3:2200rpm,and the speed can be arbitrarily set between450~3450rpm through the speed gear key.
- 4 在手动模式下用户可自选取段速号运行，并可修改其转速；

In the manual mode, the user can select the segment speed number to run and modify its speed.
- 5 可外引键盘或通过RS485通讯接口控制电泵启停(两者只能选择一项)；


The machine can be started and stopped by external keyboard or RS485 communication(only one can be selected).
- 6 高效节能；

Efficient and energy-saving.
- 7 电子保护。

Electronically-Protected.


SWP智能变频泵

SWP Series Variable Frequency Pump

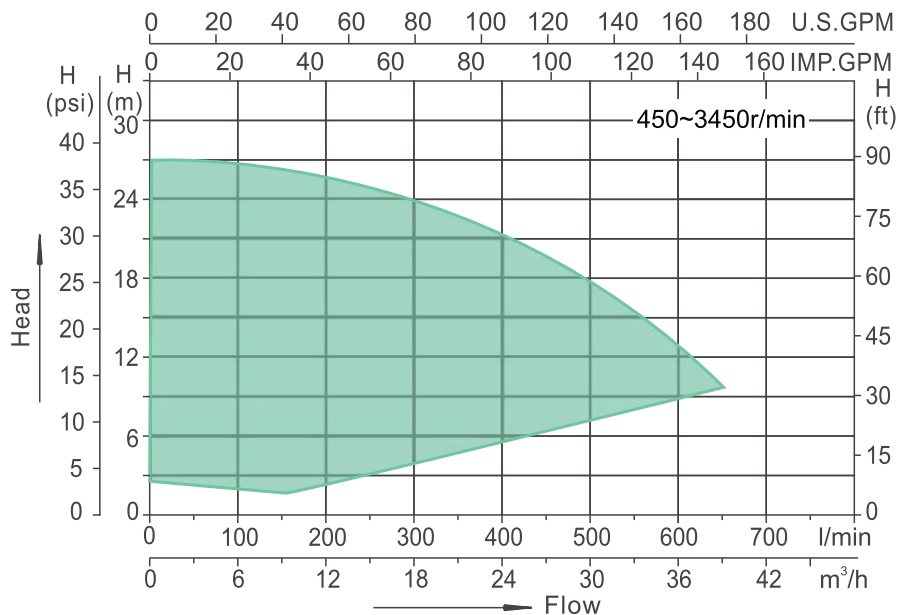

技术参数及产品尺寸 Specification and size

型号 Model	电压 (V)	频率 (Hz)	功率 (THP)	电流 (Amps)	WEF	最大扬程 Hmax.(m)	最大流量 Max.flow rate		进出水口 Fitting size (mm)	L (mm)	H (mm)
							lpm	m³/h			
SWP390-VS	230	50/60	3.9	13	7.3	27	650	39	60.3 or 63	605	314

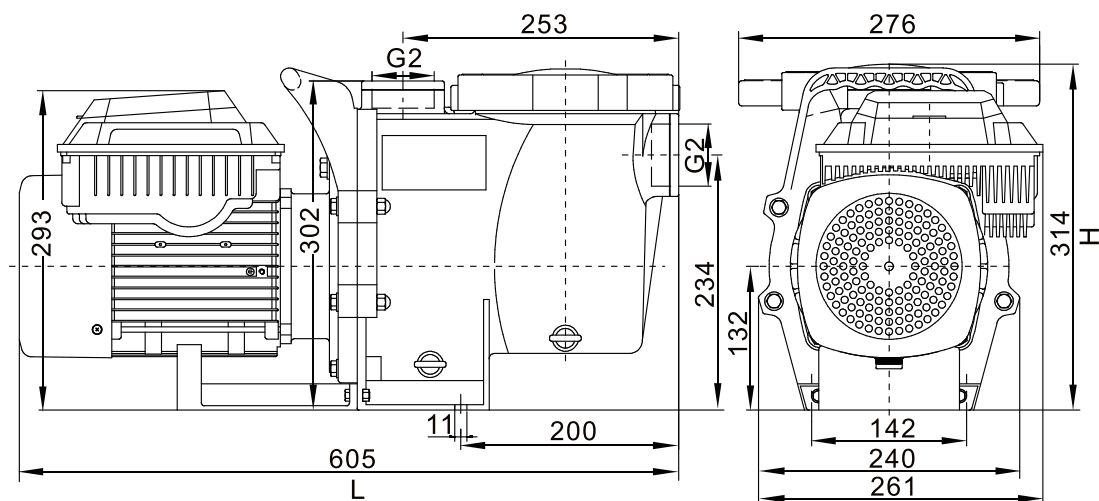

SWP B(A)智能变频泵

SWP B(A) Series Variable Frequency Pump




SWP B200-VS---SWP A400-VS

特点 & 优势 Features & Advantages

- | | |
|--|--|
| <p>① 采用V/F模式控制器，实现单速水泵调速功能；
可选触控按键面板或物理按键面板，设计精简，
操作逻辑简单，安装方向可旋转；</p> <p>② 可选自动模式和手动模式，出厂默认为自动模式；</p> <p>③ 自动模式电泵转速出厂设定:1档:3000rpm,2档:
1400rpm,3档2200rpm.转速可在450~3450rpm
之间通过速度档位键任意设定；</p> <p>④ 在手动模式下用户可自选取段速号运行，并可修
改其转速；</p> <p>⑤ 可外引键盘或通过RS485通讯接口控制电泵启停
(两者只能选择一项)；</p> <p>⑥ 高效节能。</p> | <p>Adopt V/F mode controller to realize the speed control
function; Optional touch key panel or physical key panel,
simple design. simple operation, installation direction can
be rotated.</p> <p>Automatic mode and manual mode are optional. The factory
default is automatic mode.</p> <p>Factory setting of electric pump speed in automatic mode:
speed1:3000rpm,speed2:1400rpm.speed3:2200rpm,and
the speed can be arbitrarily set between450~3450rpm
through the speed gear key.</p> <p>In the manual mode, the user can select the segment
speed number to run and modify its speed.</p> <p>The machine can be started and stopped by external
keyboard or RS485 communication(only one can be
selected).</p> <p>Efficient and energy-saving.</p> |
|--|--|


SWP B(A)智能变频泵

SWP B(A) Series Variable Frequency Pump

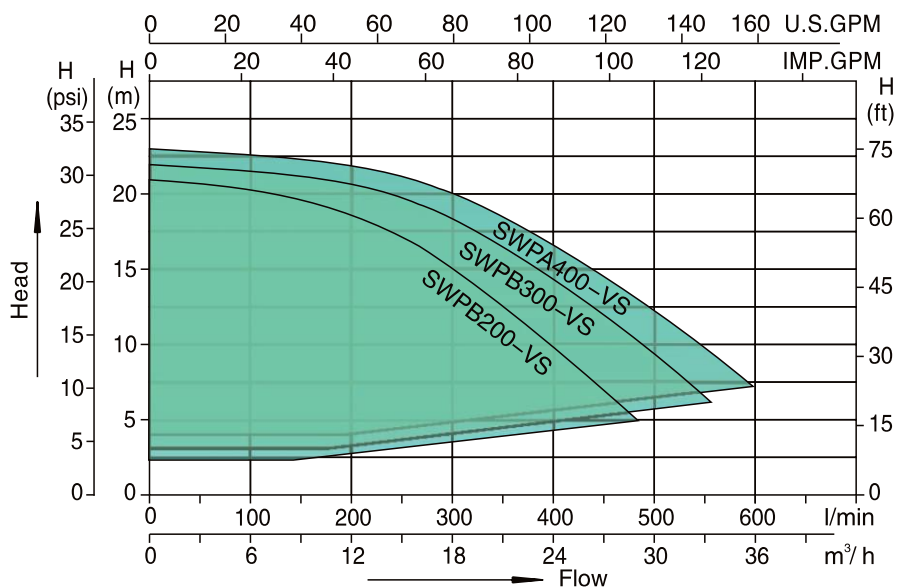

技术参数及产品尺寸 Specification and size

型号 Model	电压 (V)	频率 (Hz)	功率 (THP)	电流 (Amps)	WEF	最大扬程 Hmax.(m)	最大流量 Max.flow rate		转速 Speed (r/min)	L (mm)	H (mm)
							lpm	m³/h			
SWP B200-VS	115/208-230	50/60	2.0	13.5/8.3-7.2	9.0	21	480	28.8	450~3450	568	285
SWP B300-VS	230	50/60	3.0	12	8.0	22	550	33	450~3450	568	285
SWP A400-VS	230	50/60	4.0	16	7.5	23	600	36	450~3450	605	293

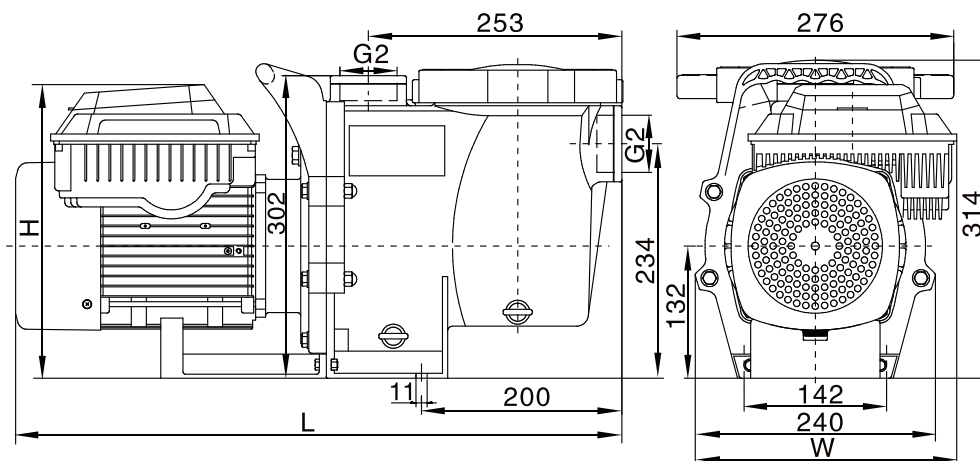

SFE智能变频泵

SFE Series Variable Frequency Pump



SFE300-VS---SFE400S-VS

特点 & 优势 Features & Advantages

- 1 采用V/F模式控制器，实现单速水泵调速功能；
可选触控按键面板或物理按键面板，设计精简，
操作逻辑简单，安装方向可旋转；

Adopt V/F mode controller to realize the speed control function; Optional touch key panel or physical key panel, simple design. simple operation, installation direction can be rotated.
- 2 可选自动模式和手动模式，出厂默认为自动模式；

Automatic mode and manual mode are optional. The factory default is automatic mode.
- 3 自动模式电泵转速出厂设定:1档:3000rpm,2档:1400rpm,3档2200rpm.转速可在450~3450rpm之间通过速度档位键任意设定；

Factory setting of electric pump speed in automatic mode: speed1:3000rpm,speed2:1400rpm.speed3:2200rpm,and the speed can be arbitrarily set between450~3450rpm through the speed gear key.
- 4 在手动模式下用户可自选取段速号运行，并可修改其转速；

In the manual mode, the user can select the segment speed number to run and modify its speed.
- 5 可外引键盘或通过RS485通讯接口控制电泵启停(两者只能选择一项)；


The machine can be started and stopped by external keyboard or RS485 communication(only one can be selected).
- 6 高效节能；

Efficient and energy-saving.
- 7 电子保护。

Electronically-Protected.


SFE智能变频泵

SFE Series Variable Frequency Pump

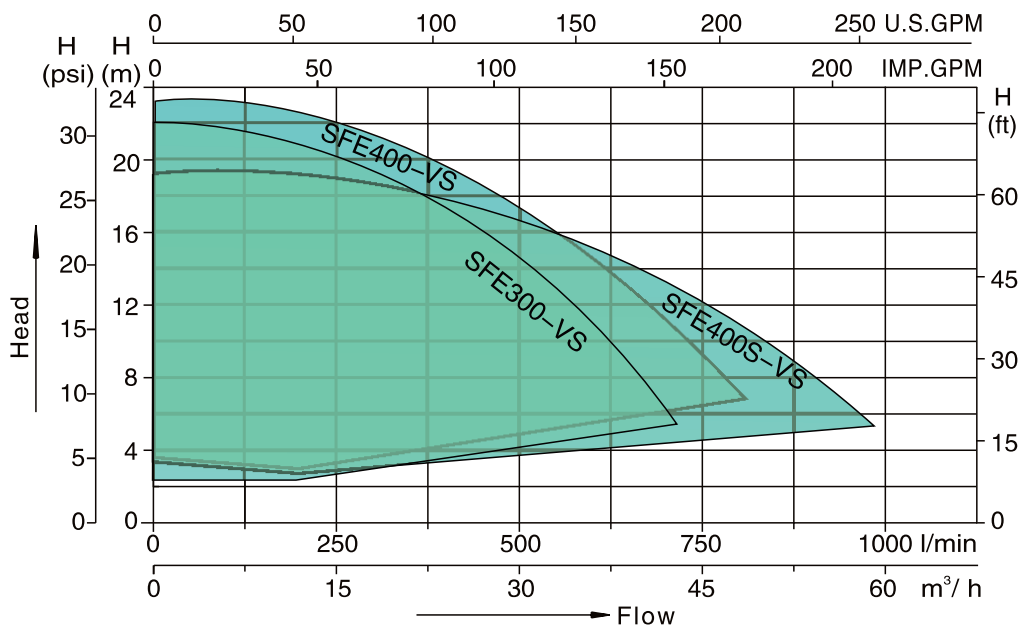

技术参数及产品尺寸 Specification and size

型号 Model	电压 (V)	频率 (Hz)	功率 (THP)	电流 (Amps)	最大扬程 Hmax.(m)	最大流量 Max.flow rate		转速 Speed (r/min)	L (mm)	H (mm)
						lpm	m³/h			
SFE300-VS	230	50/60	3.0	12	22	715	42.9	450~3450	625	349
SFE400-VS	230	50/60	4.0	13	23	800	48	450~3450	656	349
SFE400S-VS	230	50/60	4.0	13	19	980	58.8	450~3450	656	349

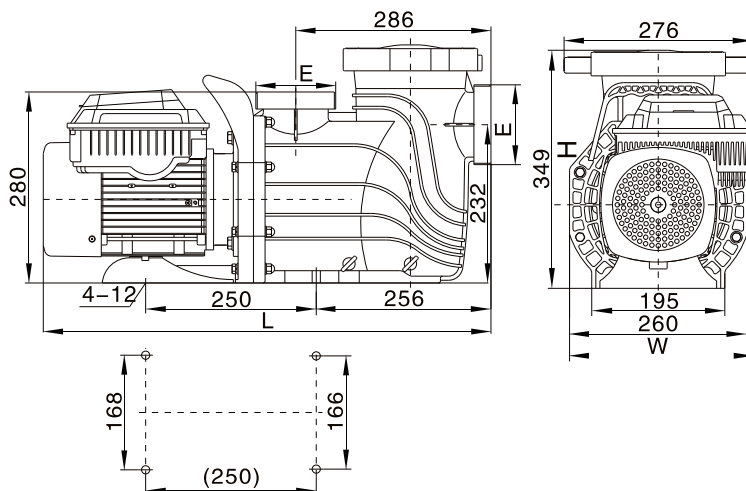

W系列过滤水泵

W Series Pump



W35-W120

W150-W300

工作条件 Working conditions


- | | |
|-----------------|--------------------------------|
| ① 介质温度:5~50℃ | Medium temperature:5~50℃ |
| ② 环境温度:≤50℃ | Environmental temperature:≤50℃ |
| ③ 最大工作压力:0.3MPa | Max.working pressure:0.3MPa |

特点 & 优势 Features & Advantages


- | | |
|-------------------|--|
| ① 泵体和叶轮采用高强度工程塑料 | Pump body, pump cover and impeller are made of high reinforced engineering plastic |
| ② 0.8L隔渣篮 | 0.8L strainer |
| ③ 热保护器：带热保护器（单相机） | Thermal protector: single phase |
| ④ 绝缘等级：F级 | Insulation: F |
| ⑤ 防护等级：IP55 | Protection: IP55 |

W系列过滤水泵

W Series Pump

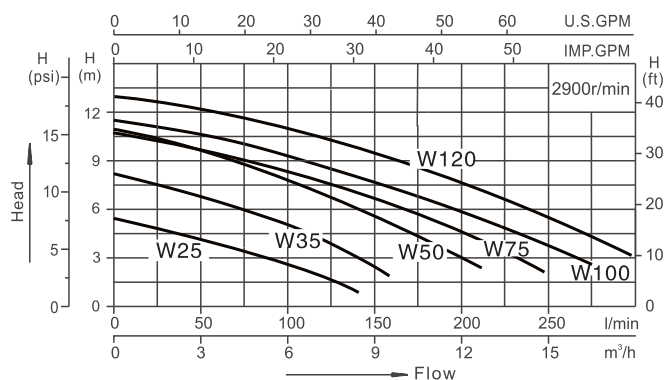


W35-W120

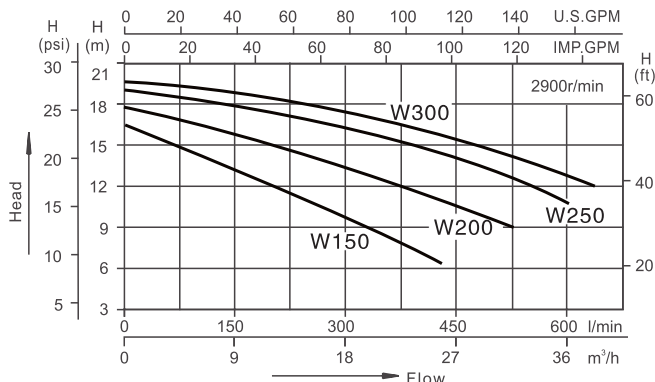


W150-W300

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate		最大扬程 Hmax. m	电压/频率 V/Hz	输入功率 Power(P1)		电流 Amps	进出水口 Port size		L mm
	lpm	m³/h			KW	HP		inch	mm	
W35	160	9.6	8	220-240/50	0.25	0.35	1.6	1.5"	50	443
W50	210	12.6	11	220-240/50	0.37	0.50	2.0	1.5"	50	
W75	240	14.4	10.5	220-240/50	0.55	0.75	3.2	1.5"	50	
W100	275	16.5	11	220-240/50	0.75	1.00	3.8	1.5"	50	465
W120	300	18	13	220-240/50	0.90	1.20	4.6	1.5"	50	
W150	430	25.8	16.5	220-240/50	1.10	1.50	5.8	2"	63	573
W200	520	31.2	18	220-240/50	1.50	2.00	7.0	2"	63	
W250	600	36	19	220-240/50	1.85	2.50	8.5	2"	63	
W300	635	38.1	19.5	220-240/50	2.20	3.00	10.0	2"	63	598

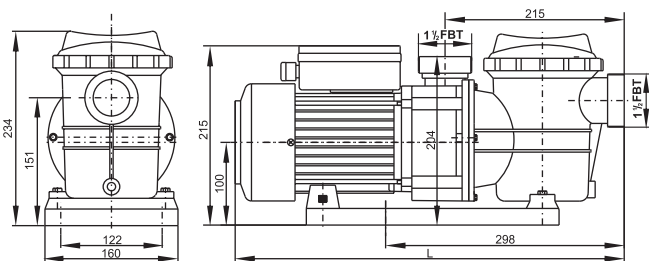

W35-W120

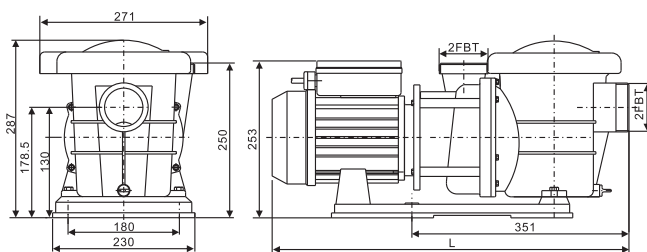

W150-W300

WH系列水泵 WH Series Pump



WH100---WH400

WH系列水泵性能好，扬程高，内置过热保护器，外壳采用防腐性材料，透明盖的设计方便检查。安装简单，保养及维护简易，适合商业泳池及水疗中心使用。

The WH series pump delivers high flow and energy efficiency ultra performance, there's overheat protector built-in, anti-corrosion material for the outer casing, and transparent cover design for easy inspection. Easy to install and maintain, it's suitable for commercial pools and spas.

特点 & 优势 Features & Advantages

① 能耗小、扬程高、流量大、运行噪音低

Less power use, high head, high flow, low operating noise

② 泵体采用高强度塑料制造，体积小，坚固耐用

Pump body is made of high reinforced plastic


③ 电机转轴为不锈钢304，轴承采用美国KIMKEN

#304 stainless steel motor shaft, USA KIMKEN bearing

④ 电机异步两极；保护等级IP55；绝缘等级F



Protection: IP55; Insulation: F

WH系列水泵 WH Series Pump

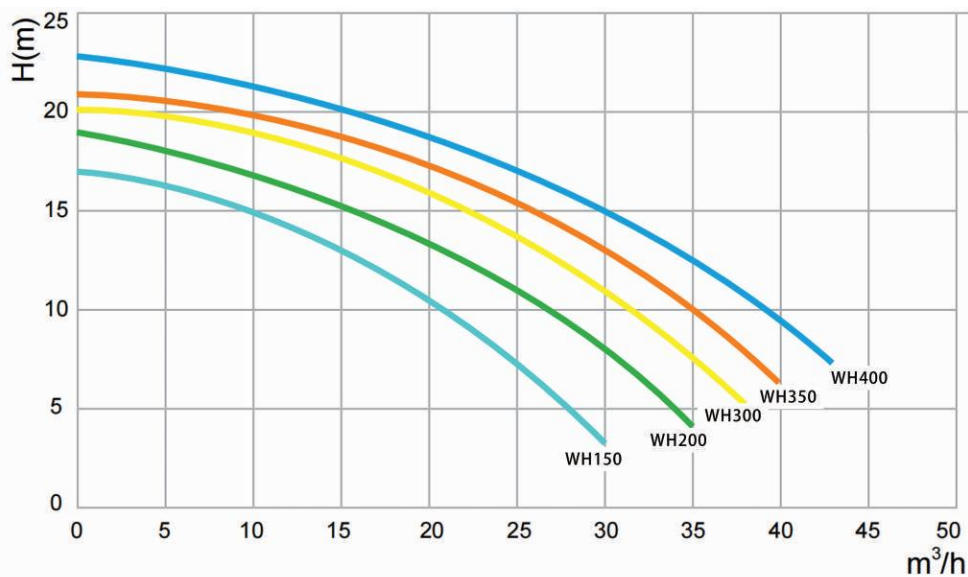

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate	最大扬程 Hmax.	电压/频率 V/Hz	输入功率 Power(P1)		进出水口 Port size		L	H
	m³/h	m		KW	HP	inch	mm		
WH100	20	18	220/50	0.75	1.0	2"	63	626	306
WH150	25	18		1.1	1.5	2"	63	626	306
WH200	35	19	220/50	1.5	2.0	2"	63	626	306
WH300	38	20	or	2.2	3.0	2"	63	626	306
WH350	40	21	380/50	2.6	3.5	2"	63	626	306
WH400	45	22	380/50	3.0	4.0	2"	63	626	306

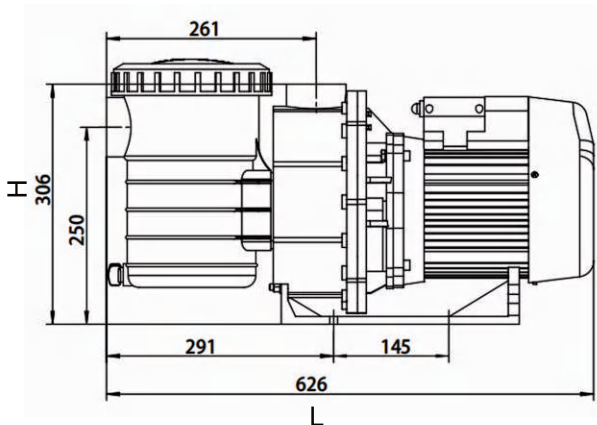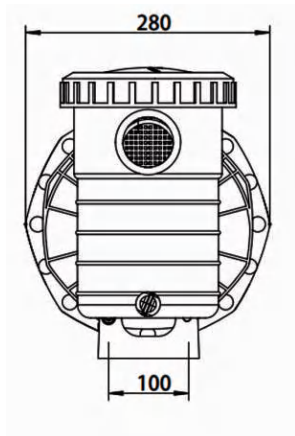

WHD系列水泵 WHD Series Pump



WHD100---WHD400


WHD系列水泵性能好，扬程高，内置过热保护器，外壳采用防腐性材料。安装简单，保养及维护简易，适合商业泳池及水疗中心使用。

The WHD series pump delivers high flow and energy efficiency ultra performance, there's overheat protector built-in, anti-corrosion material for the outer casing. Easy to install and maintain, it's suitable for commercial pools and spas.

特点 & 优势 Features & Advantages



- | | |
|----------------------------|---|
| ① 能耗小、扬程高、流量大、运行噪音低 | Less power use, high head, high flow, low operating noise |
| ② 泵体采用高强度塑料制造，体积小，坚固耐用 | Pump body is made of high reinforced plastic |
| ③ 电机转轴为不锈钢304，轴承采用美国KIMKEN | #304 stainless steel motor shaft, USA KIMKEN bearing |
| ④ 电机异步两极；保护等级IP55；绝缘等级F | Protection: IP55; Insulation: F |

WHD系列水泵 WHD Series Pump

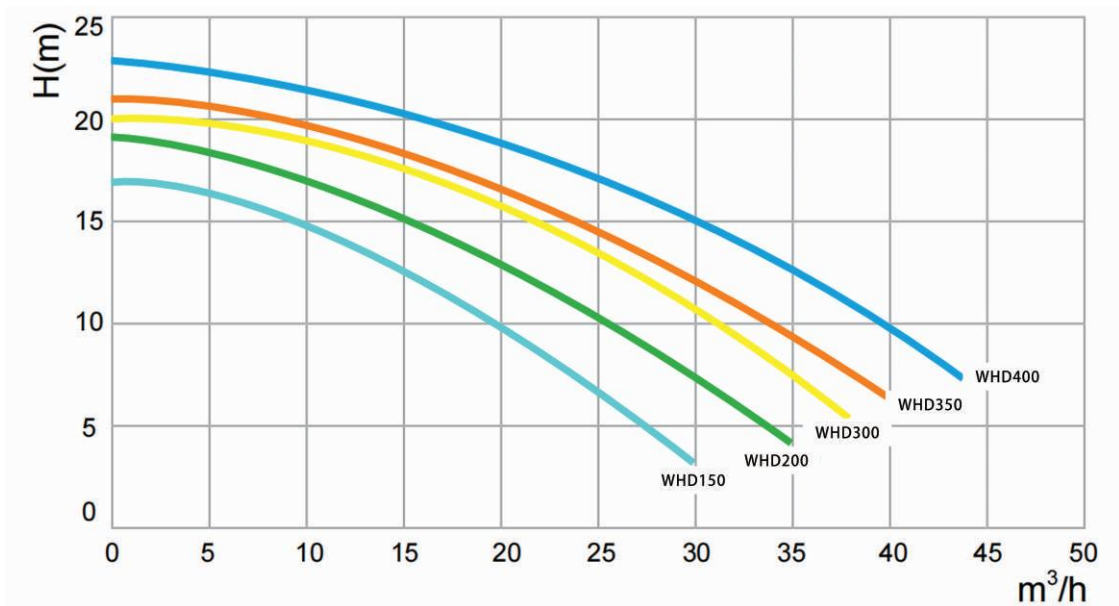

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate	最大扬程 Hmax.	电压/频率 V/Hz	输入功率 Power(P1)		进出水口 Port size		L mm	H mm
	m³/h	m		KW	HP	inch	mm		
WHD100	20	18	220/50	0.75	1.0	2"	63	460	306
WHD150	25	18		1.1	1.5	2"	63	460	306
WHD200	35	19	220/50	1.5	2.0	2"	63	460	306
WHD300	38	20	or	2.2	3.0	2"	63	460	306
WHD350	40	21	380/50	2.6	3.5	2"	63	460	306
WHD400	45	22	380/50	3.0	4.0	2"	63	460	306

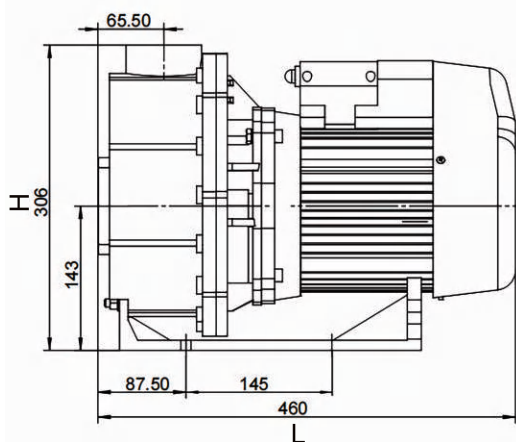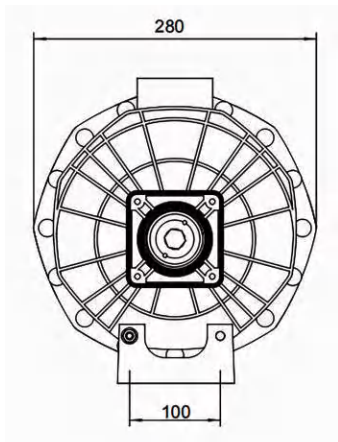

SWIM2系列循环水泵

SWIM2 Series Pump



SWIM2 120---SWIM2 400

SWIM2系列水泵泵体采用耐高低温、高强度塑料制造，适用于各类型的游泳池、工业用水、海洋馆、水上乐园、冲浪池、按摩池等。

SWIM 2 series pump is made of high reinforced plastic, which is used for different types of swimming pools, industrial water, aquarium, water park, wave pool, massage pool & etc.

特点 & 优势 Features & Advantages

① 能耗小、扬程高、流量大、运行噪音低

Less power use, high head, high flow, low operating noise

② 泵体采用高强度塑料制造，体积小，坚固耐用

Pump body is made of high reinforced plastic

③ 电机转轴为不锈钢304，轴承采用美国KIMKEN


#304 stainless steel motor shaft, USA KIMKEN bearing

④ 电机异步两极；保护等级IP55；绝缘等级F

Protection: IP55; Insulation: F


SWIM2系列循环水泵

SWIM2 Series Pump

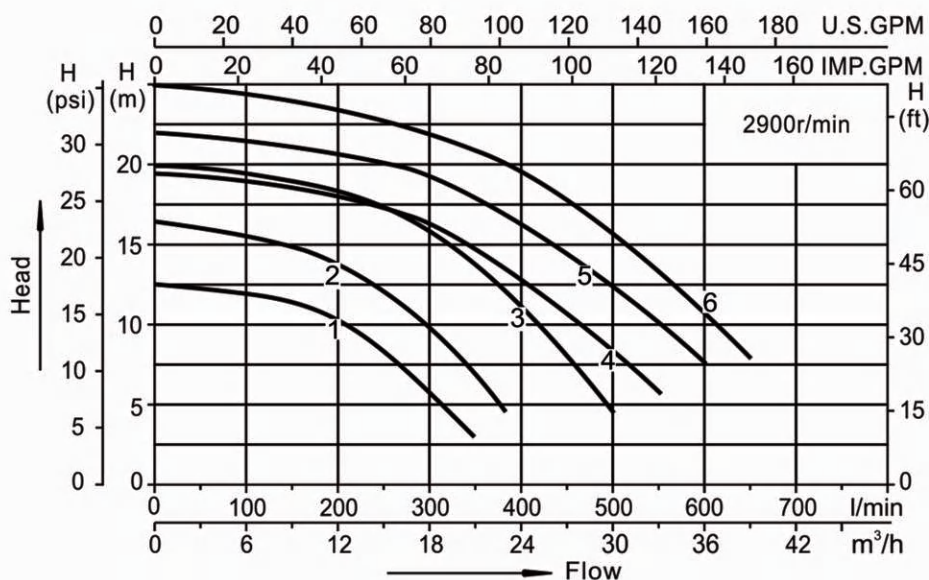

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate		最大扬程 Hmax.(m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P1)		电流 (Amps)	进出水口 Fitting (mm)	L mm	H mm
	lpm	m³/h				KW	HP				
SWIM 2-120	350	21	12.5	1	220-240/50	0.9	1.2	4.6	60.3 or 63	603	264
SWIM 2-150	380	22.8	16.5	2	220-240/50	1.1	1.5	5.2	60.3 or 63	603	264
SWIM 2-200	500	30	20	3	220-240/50	1.5	2.0	7	60.3 or 63	603	267
SWIM 2-250	560	33.6	19.5	4	220-240/50	1.85	2.5	8.6	60.3 or 63	603	278
SWIM 2-300	600	36	22	5	220-240/50	2.2	3.0	10	60.3 or 63	616	285
SWIM 2-400	650	39	25	6	220-240/50	3	4.0	14	60.3 or 63	640	288

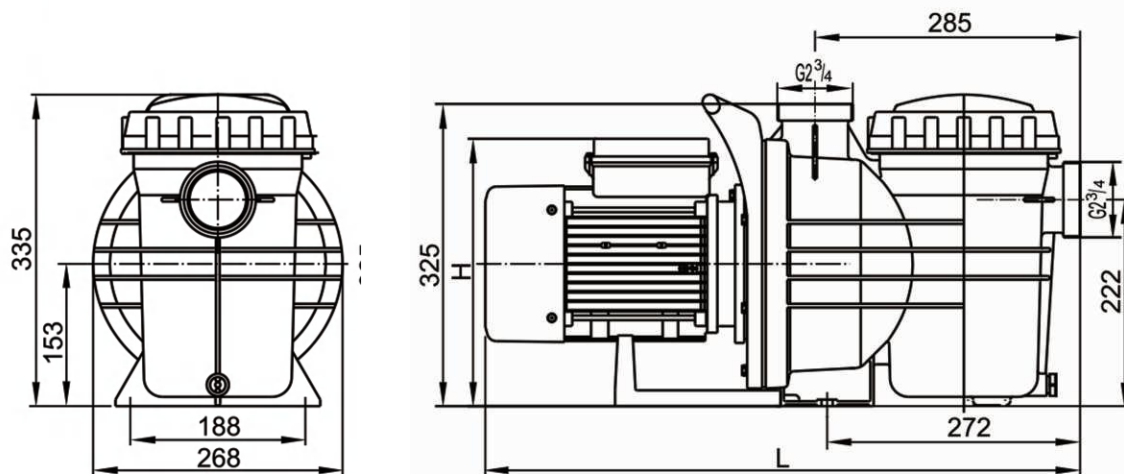

SVQ系列循环水泵

SVQ Series Pump



SVQ075---SVQ400

工作条件 Working conditions


- | | |
|-----------------|--------------------------------|
| ① 介质温度:5~50℃ | Medium temperature:5~50℃ |
| ② 环境温度:≤50℃ | Environmental temperature:≤50℃ |
| ③ 最大工作压力:0.3MPa | Max. working pressure:0.3MPa |

特点 & 优势 Features & Advantages

- | | |
|------------------------|---|
| ① 具有自吸功能，最大自吸高度可达2.5米； | With self-priming function, the maximum self-priming is up to 2.5 meters. |
| ② 进出水口用不锈钢口环加固。 | The inlet and outlet are reinforced with stainless steel ring. |


SVQ系列循环水泵

SVQ Series Pump

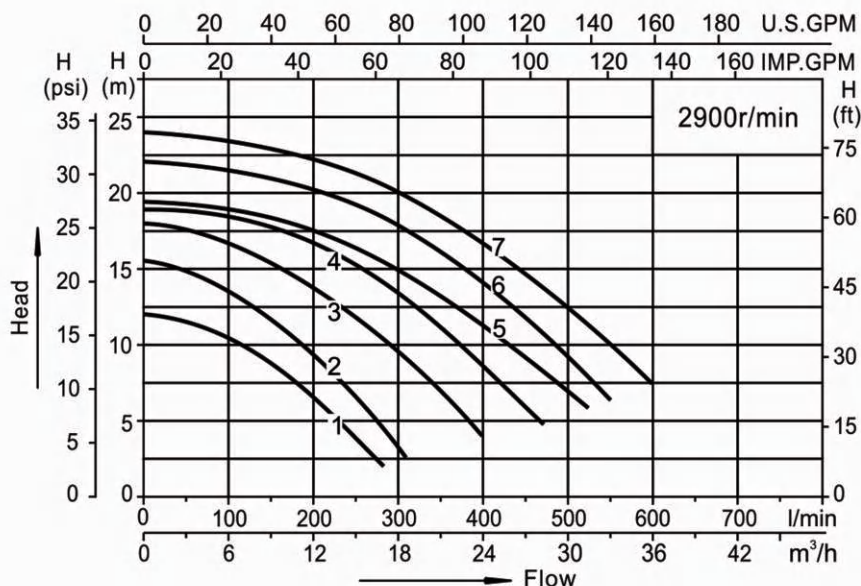

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max. flow rate		最大扬程 Hmax.(m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P1)		电流 (Amps)	进出水口 Fitting (mm)	L mm	H mm
	lpm	m³/h				KW	HP				
SVQ075	280	16.8	12.0	1	220-240/50	0.55	0.75	3.2	48.5 or 50 60.3 or 63	576	381
SVQ100	310	18.6	15.5	2	220-240/50	0.75	1.0	3.8		576	381
SVQ150	400	24.0	18.0	3	220-240/50	1.10	1.5	5.2		576	381
SVQ200	470	28.2	19.0	4	220-240/50	1.50	2.0	7.0		595	381
SVQ250	520	31.2	19.5	5	220-240/50	1.85	2.5	8.6		595	381
SVQ300	550	33.0	22.0	6	220-240/50	2.20	3.0	10.0		595	381
SVQ400	600	36.0	24.0	7	220-240/50	3.00	4.0	14.0		636	381

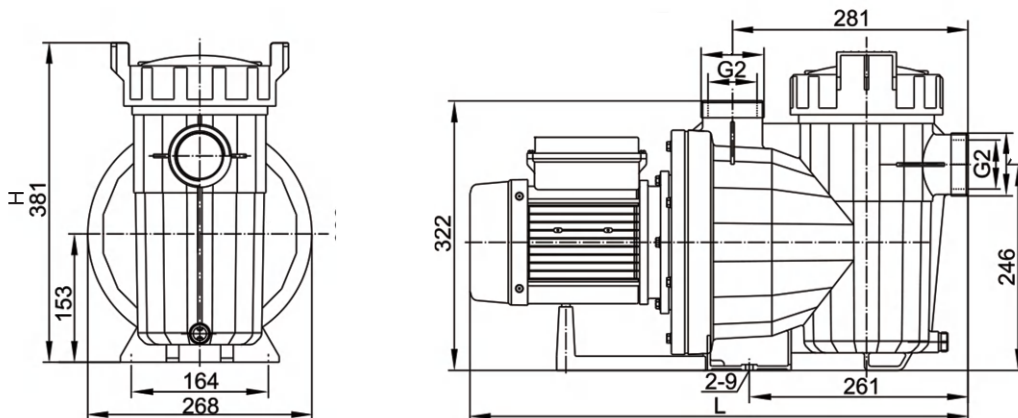

WS系列循环水泵

WS Series Pump



WS075---WS300-II

特点 & 优势 Features & Advantages

- 1 泵体采用耐高低温、高强度塑料制造，持久耐用
- 2 该系列电泵具有自吸功能，最大吸程3m
- 3 进出水口用不锈钢口环加固
- 4 一体式提手，安装便捷
- 5 绝缘等级:F级，防护等级:IP55


Pump body is made of high reinforced plastic.

Self-priming function, max suction 3m.

Inlet and outlet are reinforced by a stainless steel ring.

Integral structure handle, convenient installation.

Insulation:F, protection:IP55.

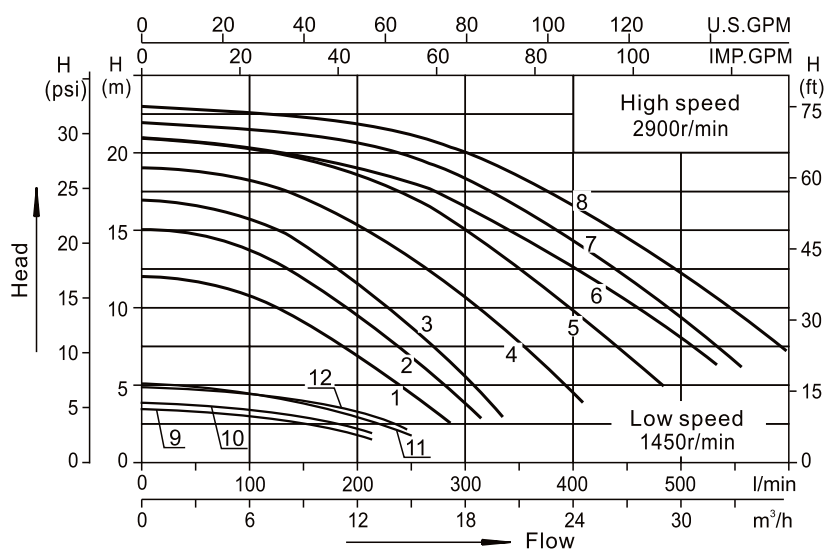


WS系列循环水泵

WS Series Pump

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate		最大扬程 Hmax.(m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P1)		电流 (Amps)	进出水口 Port size		L (mm)	H (mm)
	lpm	m³/h				KW	HP		inch	mm		
WS075	285	17.1	12	1	220-240/50	0.55	0.75	3.2	2"	63	572	243
WS100	315	18.9	15	2	220-240/50	0.75	1.0	3.8	2"	63	572	243
WS120	335	20.1	17	3	220-240/50	0.9	1.2	4.6	2"	63	572	243
WS150	400	24	19	4	220-240/50	1.1	1.5	5.4	2"	63	572	243
WS200	480	28.8	21	5	220-240/50	1.5	2.0	7.0	2"	63	572	246
WS250	530	31.8	21	6	220-240/50	1.85	2.5	8.6	2"	63	572	258
WS300	550	33	22	7	220-240/50	2.2	3.0	10.0	2"	63	585	264
WS150-I	400	24	19	4	220-240/50	1.1	1.5	5.4	2"	63	619	255
WS200-I	480	28.8	21	5	220-240/50	1.5	2.0	7.0	2"	63	619	255
WS250-I	530	31.8	21	3	220-240/50	1.85	2.5	8.6	2"	63	619	267
WS300-I	550	33	22	7	220-240/50	2.2	3.0	10.0	2"	63	619	267
WS400-I	600	36	23	8	220-240/50	3	4.0	14.0	2"	63	619	267
WS150-II	400	24	19	9/4	220-240/50	0.3/1.1	3/8/1.5	2.2/5.4	2"	63	605	258
WS200-II	480	28.8	21	10/5	220-240/50	0.35/1.5	3/8/1.5	2.4/7.0	2"	63	605	258
WS250-II	530	31.8	21	11/6	220-240/50	0.4/1.85	1/2/2.5	2.5/8.6	2"	63	605	270
WS300-II	550	33	22	12/7	220-240/50	0.45/2.2	5/8/3.0	3.0/10.0	2"	63	605	270

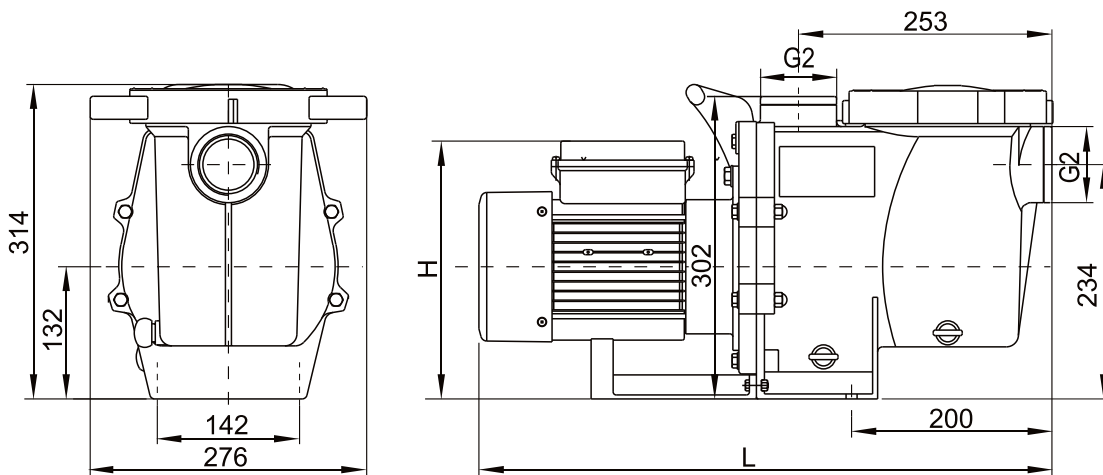

W56S系列水泵

W56S Series Pump



W56S100-I---W56S500-II

W56S系列水泵泵体采用耐高低温、高强度塑料制造，适用于各类型的游泳池、工业用水、海洋馆、水上乐园、冲浪池、按摩池等。

W56S series pump is made of high reinforced plastic, which is used for different types of swimming pools, industrial water, aquarium, water park, wave pool, massage pool & etc.

特点 & 优势 Features & Advantages

- 1 泵体采用耐高低温、高强度塑料制造，持久耐用
- 2 该系列电泵具有自吸功能，最大吸程3m
- 3 进出水口用不锈钢口环加固
- 4 一体式提手，安装便捷
- 5 绝缘等级:F级，防护等级:IP55

Pump body is made of high reinforced plastic.

Self-priming function, max suction 3m.


Inlet and outlet are reinforced by a stainless steel ring.

Integral structure handle, convenient installation.

Insulation:F, protection:IP55.


W56S系列水泵

W56S Series Pump

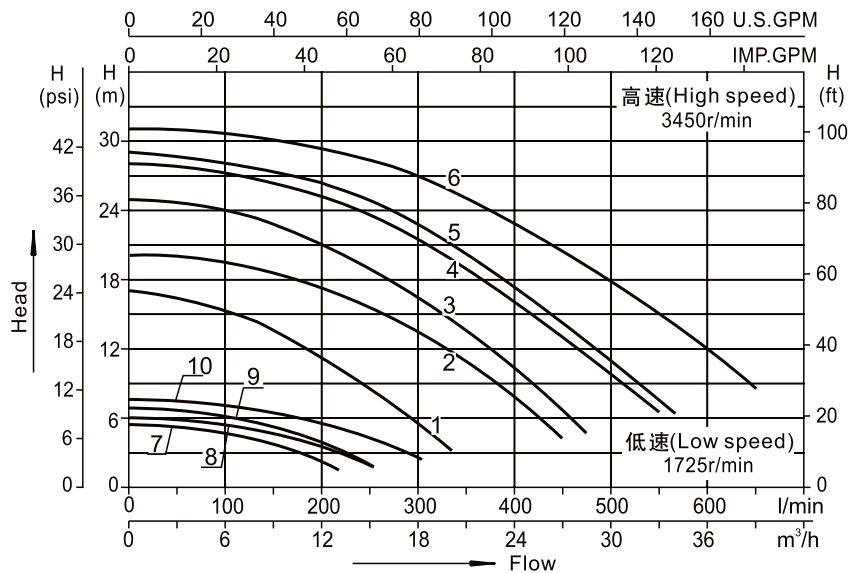

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate		最大扬程 Hmax.(m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P1)		电流 (Amps)	进出水口 Fitting (mm)	L (mm)	H (mm)
	lpm	m³/h				KW	HP				
W56S100-I	380	22.8	15	1	220-240/60	0.75	1.0	4	60.3 or 63	624	314
W56S200-I	450	27.0	18	2	220-240/60	1.50	2.0	8	60.3 or 63	624	314
W56S300-I	500	30.0	20	3	220-240/60	2.20	3.0	10	60.3 or 63	624	314
W56S400-I	555	33.3	20	4	220-240/60	3.00	4.0	12	60.3 or 63	624	314
W56S500-I	610	36.6	21	5	220-240/60	3.75	5.0	15	60.3 or 63	644	314
W56S200-II	450	27.0	18	2/6	220-240/60	0.35/1.5	0.5/2.0	3/8	60.3 or 63	624	314
W56S300-II	500	30.0	20	3/7	220-240/60	0.55/2.2	0.75/3.0	3.5/10	60.3 or 63	624	314
W56S400-II	555	33.3	20	4/8	220-240/60	0.55/3.0	0.75/4.0	4.4/12	60.3 or 63	624	314
W56S500-II	610	36.6	21	5/9	220-240/60	0.75/3.75	1.0/5.0	5.0/15	60.3 or 63	644	314

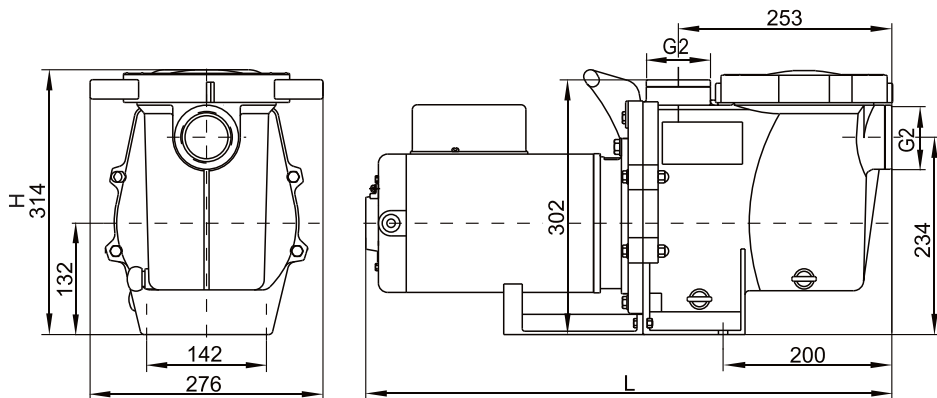

WUB系列水泵

WUB Series Pump



WUB075---WUB300

WUB系列水泵泵体采用高强度工程防腐塑料，适用于各类型的游泳池、工业用水、海洋馆、水上乐园、冲浪池、按摩池等。

WUB series pump is made of high reinforced engineering plastic, which is used for different types of swimming pools, industrial water, aquarium, water park, wave pool, massage pool & etc.

特点 & 优势 Features & Advantages

- 1 电泵的过流部件采用高强度工程塑料，配以优质耐磨机械密封
- 2 该系列电泵具有自吸功能，最大吸程1.5m
- 3 WUB采用80机座,按需要可配变速电机
- 4 采用低噪音标准电机，单相电机安装，美国TI热保护器
- 5 绝缘等级：F级，防护等级：IP55

The over-current components are using high reinforced plastic, with high-quality wear-resistant seal.

Self-priming function, max suction 1.5m.


WUB motor with 80 frame, double speed motor available on request.

Low noise standard motor, single-phase with thermal protector from TI, USA.

Insulation: F, protection: IP55.


WUB系列水泵

WUB Series Pump

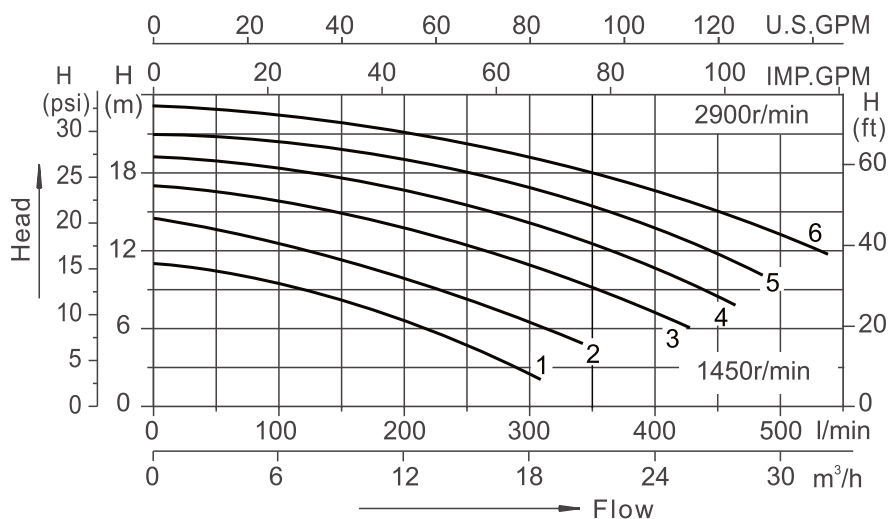

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate		最大扬程 Hmax.(m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P1)		电流 (Amps)	进出水口 Port size		L	H
	lpm	m³/h				KW	HP		inch	mm		
WUB075	310	18.6	12.5	1	220-240/50	0.55	0.75	3.2	2"	63	593	320
WUB100	340	20.4	14.5	2	220-240/50	0.75	1.0	3.8	2"	63	593	320
WUB150	420	25.2	17.0	3	220-240/50	1.10	1.5	5.2	2"	63	593	320
WUB200	465	27.9	19.0	4	220-240/50	1.50	2.0	7.0	2"	63	593	320
WUB250	480	28.8	21.0	5	220-240/50	1.85	2.5	8.6	2"	63	593	320
WUB300	540	32.4	23.0	6	220-240/50	2.20	3.0	10.0	2"	63	609	320

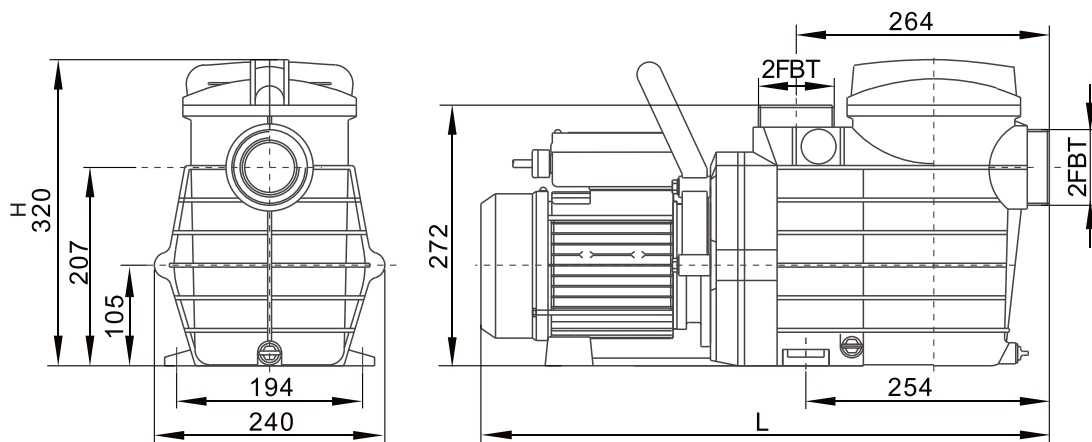

WN系列水泵

WN Series Pump



WN200---WN750

WN系列豪华型水泵功率足、扬程高、水量大、高效率循环。低噪音，运行稳定，泵盖有真空密封性，防水性能好，毛发器容污量大。泵体由耐高低温的高强度塑料制造而成，持久耐用，广泛运用于别墅、私家及商用泳池，水景、养殖、温泉桑拿浴池。


WN series luxury pump has efficient power, water volume and circulation. It's low noise, stable operation, vacuum seal of the pump cover, efficient waterproof performance, and comes with large volume of hair. The pump body is made of high-strength plastic, it is durable and widely used in villas, private and commercial swimming pools, water features, aquarium, hot spring, saunas & etc.

特点 & 优势 Features & Advantages

- | | |
|-------------------------|--|
| ① 防锈保护外壳，防止水分渗入马达内部 | Anti rust crust can stop water penetrating to the motor. |
| ② 能耗小、扬程高、流量大、高效率循环 | Less power use, high head, high flow. |
| ③ 泵体采用耐高低温、高强度塑料制造，持久耐用 | Pump body is made of high reinforced plastic. |
| ④ 防漏水性能好，毛发器容污量大 | High capacity pump basket, can contain more sewage. |


WN系列水泵

WN Series Pump

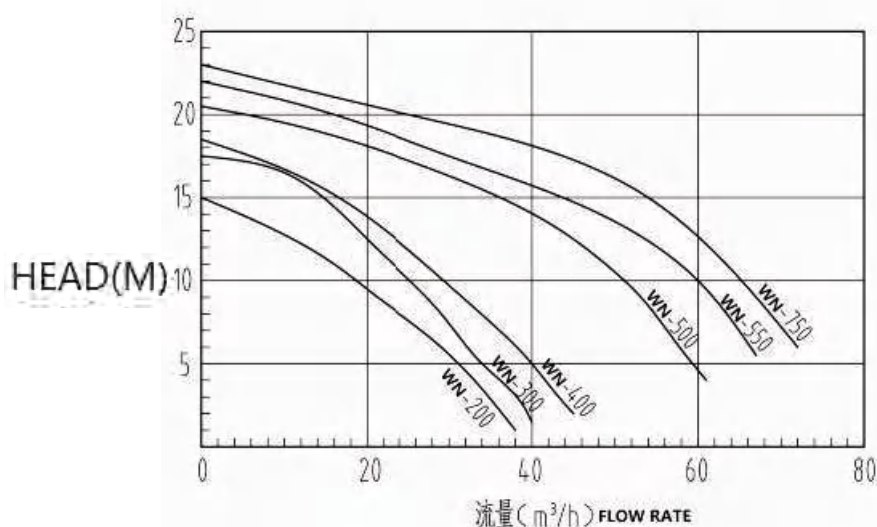

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate	最大扬程 Hmax.(m)	电压/频率 V/Hz	输入功率 Power(P1)		进出水口 Port size		L mm	H mm
	m³/h			KW	HP	inch	mm		
WN200	35	18	220/50 or 380/50	1.5	2.0	2"	63	712	373
WN300	38	20		2.2	3.0	2"	63	712	373
WN400	45	20	380/50	3.0	4.0	2" or 2.5"	63 or 75	712	373
WN500	50	21	380/50	3.8	5.0	2" or 2.5"	63 or 75	712	373
WN550	60	22	380/50	4.0	5.5	2.5"	75	712	373
WN750	75	22	380/50	5.5	7.5	2.5"	75	712	373

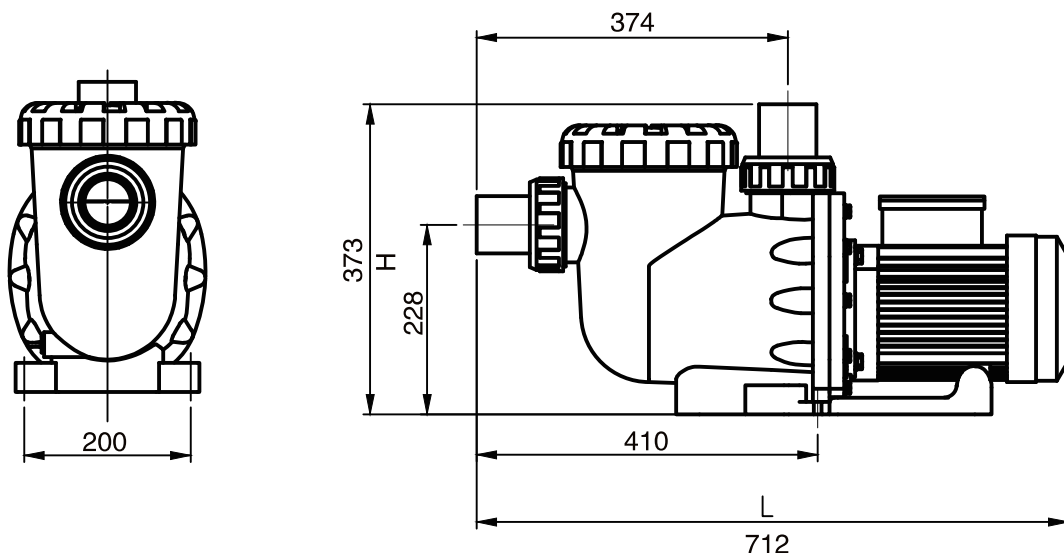

WP系列水泵

WP Series Pump



WP40---WP150

WP系列大功率塑料泵功率足、扬程高、水量大、高效率循环。低噪音，运行稳定，泵盖有真空密封性，防水性能好，毛发器容污量大。泵体由耐高低温的高强度塑料制造而成，持久耐用，广泛运用于别墅、私家及商用泳池，水景、海洋馆、养殖、温泉桑拿浴池。

WP series superpower plastic pump has efficient power, water volume and circulation. It's low noise, stable operation, vacuum seal of the pump cover, efficient waterproof performance, and comes with large volume of hair. The pump body is made of high-strength plastic, it is durable and widely used in villas, private and commercial swimming pools, water features, aquarium, hot spring, saunas & etc.

特点 & 优势 Features & Advantages

- 1 防锈保护外壳，防止水分渗入马达内部
- 2 能耗小、扬程高、流量大、高效率循环、噪音低、运行稳定
- 3 泵体采用耐高低温、高强度塑料制造，持久耐用
- 4 防漏水性能好，毛发器容污量大

Anti rust crust can stop water penetrating to the motor.


Less power use, high head, high flow, low operating noise.

Pump body is made of high reinforced plastic.

High capacity pump basket, can contain more sewage.



WP系列水泵

WP Series Pump

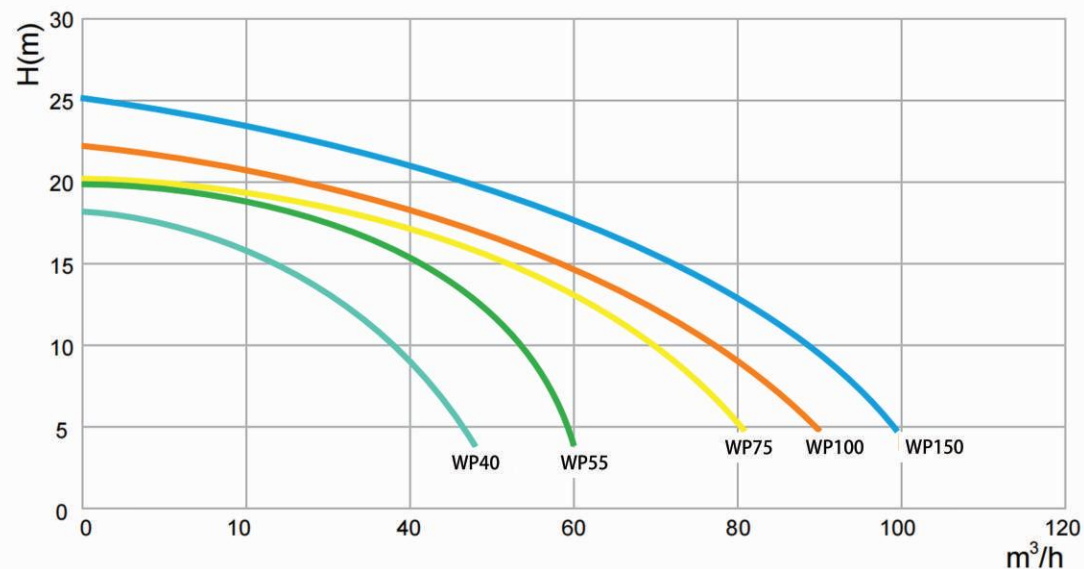

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate	最大扬程 Hmax.(m)	电压/频率 V/Hz	输入功率 Power(P1)		进出水口 Port size		L (mm)	H (mm)
	m³/h			KW	HP	inch	mm		
WP40	48	18	380/50	3.0	4.0	3"	90	967	437
WP55	60	19	380/50	4.0	5.5	3"	90	967	437
WP75	80	20	380/50	5.5	7.5	3"	90	967	437
WP100	95	21	380/50	7.5	10.0	3"	90	967	437
WP150	110	21	380/50	11.0	15.0	3"	90	967	437

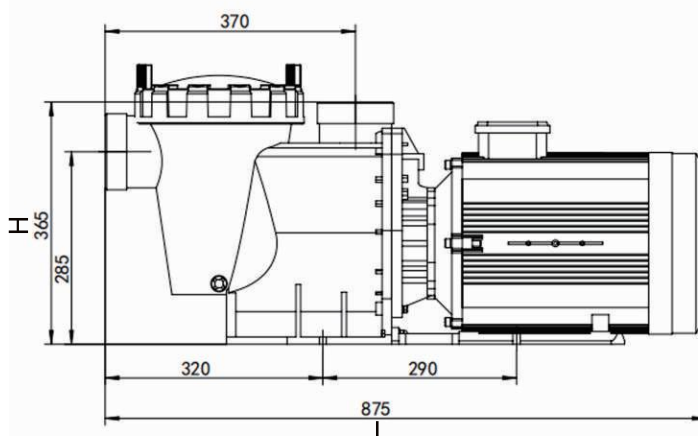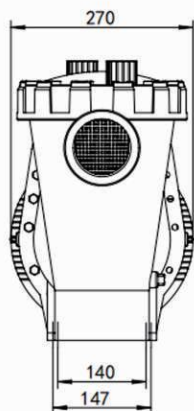

SUP系列水泵

SUP Series Pump



SUP-55---SUP-300

SUP系列大功率塑料泵功率足、扬程高、水量大、高效率循环。低噪音，运行稳定，泵盖有真空密封性，防水性能好，毛发器容污量大。泵体由耐高温的高强度塑料制造而成，持久耐用，广泛运用于淡海水大型水上乐园、大型泳池、大型海产养殖、水利工程。

SUP series superpower plastic pump has efficient power, water volume and circulation. It's low noise, stable operation, vacuum seal of the pump cover, efficient waterproof performance, and comes with large volume of hair. The pump body is made of high-strength plastic, it is durable and widely used in large water parks, large swimming pools, aquaculture, water conservancy projects

特点 & 优势 Features & Advantages

① 新型专利设计自吸式大流量塑料水泵

New patent design in self-priming large flow plastic water pump.

② 采用仿生涡轮式泵体设计，最大限度的转化电机功效

The bionic turbo-pump structure is designed to maximize the efficiency of the conversion motor.

③ 加厚桶体及过滤篮螺旋锁口式设计，坚固耐用

Thickened pump structure and basket in spiral lock design.

④ 四极电机，转速1450NSK进口轴承，高品质机械密封

Four-pole motor, 1450 rpm, NSK bearings, high-quality mechanical seal.

⑤ IP55 防护等级，绝缘等级


IP55 protection grade.

⑥ 分体式设计法兰式大口径进出水口，安装方便

The inlet and outlet in split design flange types, easy installation.



SUP系列水泵

SUP Series Pump

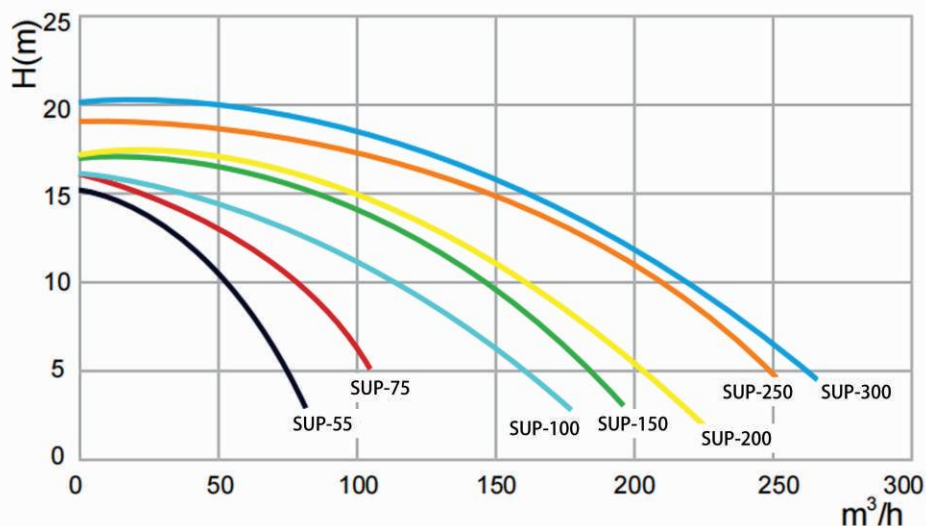

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate		最大扬程 Hmax.(m)	电机转速 Speed r/min	电压/频率 V/Hz	输入功率 Power(P1)		进水口径 Inlet mm	出水口径 Outlet mm	L mm	H mm
	l/min	m³/h				KW	HP				
SUP-55	1333	80	16	1450	380/50	4.0	5.5	100	80	850	560
SUP-75	1583	95	16	1450	380/50	5.5	7.5	100	80	870	560
SUP-100	2833	170	18	1450	380/50	7.5	10.0	150	125	1000	560
SUP-150	3083	185	18	1450	380/50	11.0	15.0	150	125	1000	560
SUP-200	3666	220	20	1450	380/50	15.0	20.0	150	125	1000	560
SUP-250	4000	240	20	1450	380/50	18.5	25.0	150	125	1000	560
SUP-300	4333	260	20	1450	380/50	22.0	30.0	150	125	1000	560

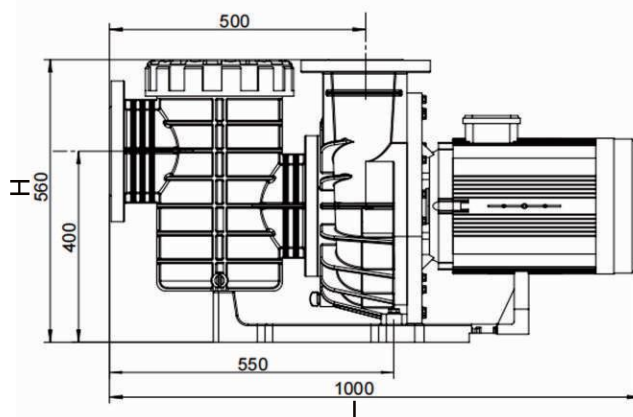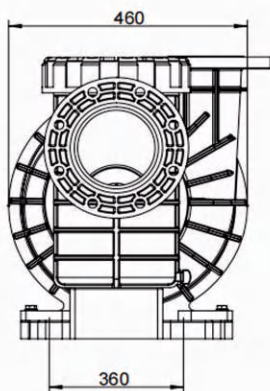

SEQ系列水泵

SEQ Series Pump



SEQ400T---SEQ1500T

工作条件 Working conditions

① 介质温度:0~+75℃

Medium temperature:0~+75℃

② 环境温度:≤50℃

Environmental temperature: ≤ 50℃

③ 最大工作压力:0.7MPa

Max.working pressure:0.7MPa

特点 & 优势 Features & Advantages

① 进出口法兰为国际DN150，同时可适配美国ANSI.B16.5法兰标准

Inlet and outlet flange are national standard DN150. It can also be adapted to American ANSI.B16.5 flange standard.

② 标配一体式塑料安装底板，可选配铸铝底脚


Integrated plastic mounting base plate is provided as standard, and cast aluminum feet is optional.

③ 配置高效电机，高效节能，使用寿命长

High-efficiency motor, Energy-saving, long life.


SEQ系列水泵

SEQ Series Pump

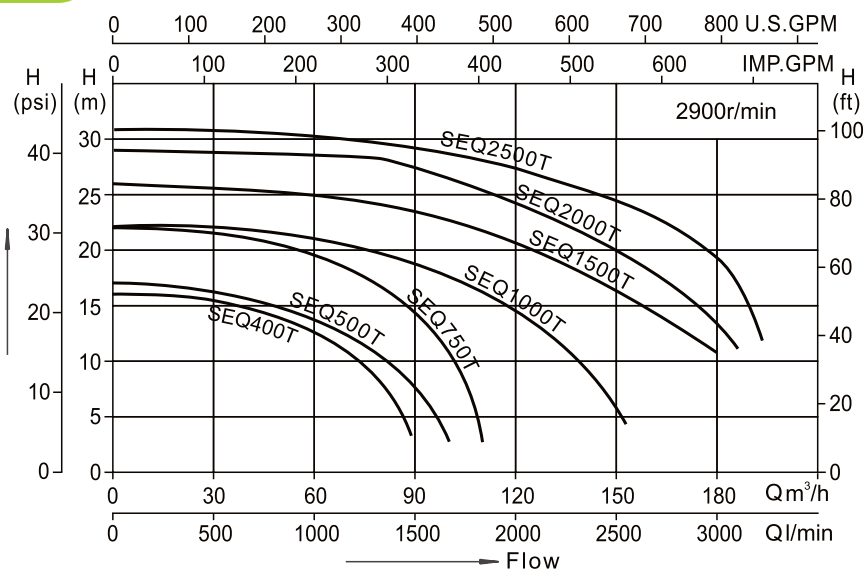

技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate		最大扬程 Hmax.(m)	电压/频率 V/Hz	输入功率 Power(P1)		电流 (Amps)	接头尺寸 Fitting (mm)	L	H
	lpm	m³/h			KW	HP			mm	mm
SEQ400T	1480	88.8	16	380/50	3.0	4.0	5.9	DN150(6")	1155	414
SEQ500T	1680	100.8	17	380/50	4.0	5.0	6.8		1155	414
SEQ750T	1830	109.8	22	380/50	5.5	7.5	10.3		1155	414
SEQ1000T	2560	153.6	22	380/50	7.5	10	12.7		1155	414
SEQ1500T	3000	180.0	26	380/50	11.0	15	20.1		1210	433
SEQ2000T	3100	186.0	29	380/50	15.0	20	26.7		1251	433
SEQ2500T	3300	198.0	31	380/50	18.5	25	30.3		1251	433

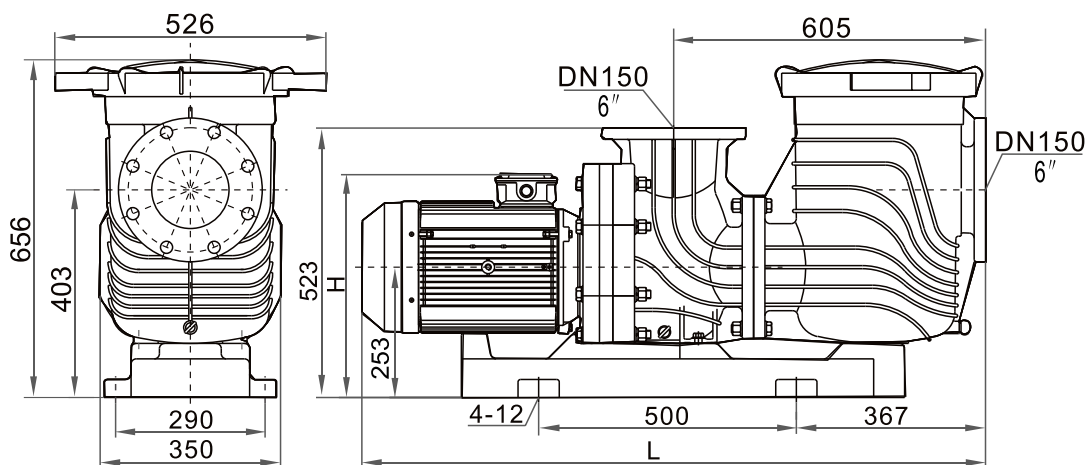

SCA系列水泵

SCA Series Pump




SCA65-40-125/2.2T---SCA100-80-160/15T

工作条件 Working conditions

- | | |
|-----------------|--------------------------------|
| ① 介质温度:0~+75℃ | Medium temperature:0~+75℃ |
| ② 环境温度:≤50℃ | Environmental temperature:≤50℃ |
| ③ 最大工作压力:0.7MPa | Max.working pressure:0.7MPa |





特点 & 优势 Features & Advantages

- | | |
|-------------------------------|--|
| ① 泵壳、泵盖、转轴、过滤器、叶轮等过流部件为不锈钢材质; | The pump casing, pump cover, rotating shaft filter, impeller and other wet-end components are made of stainless steel. |
| ② 耐腐蚀性强。 | Strong corrosion resistance. |

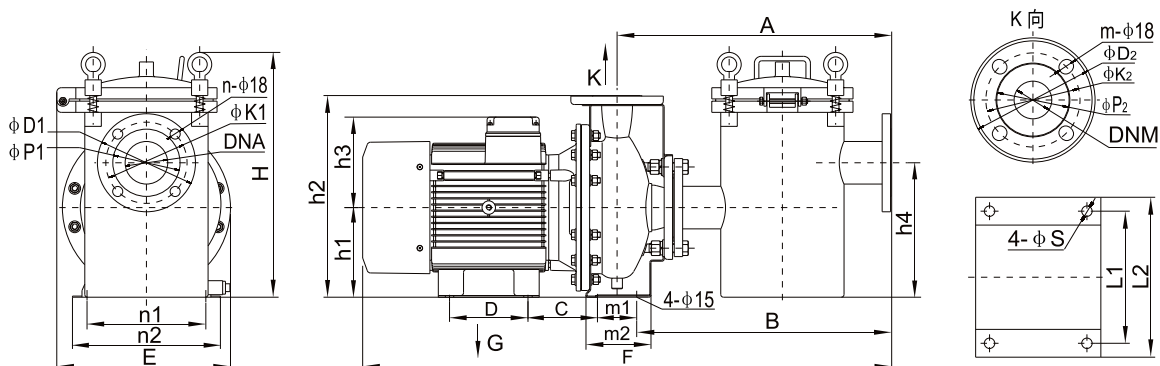

SCA系列水泵

SCA Series Pump

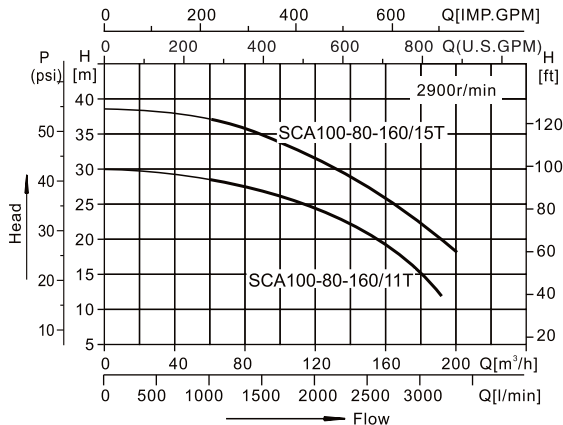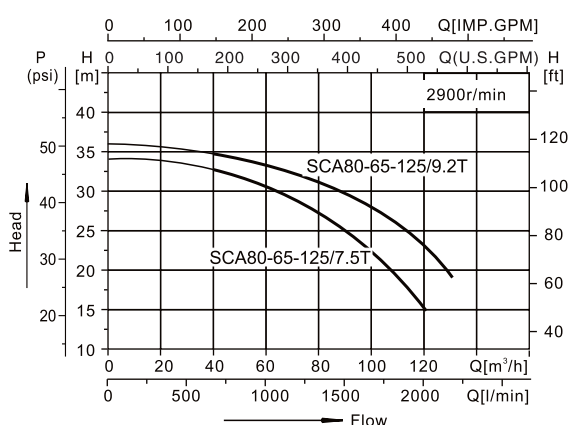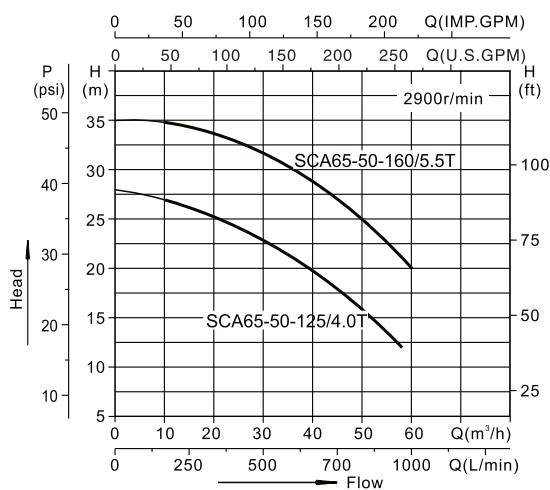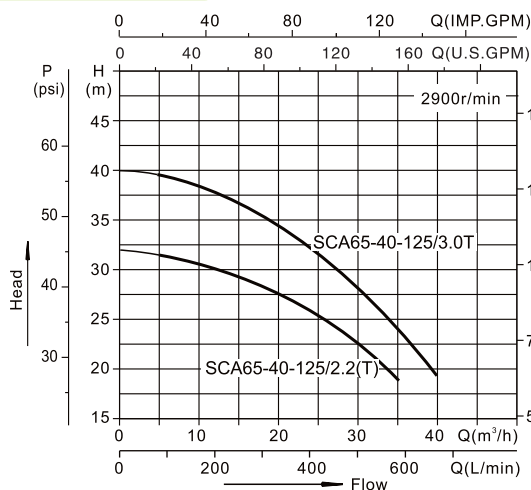


技术参数及产品尺寸 Specification and size

型号 Model	最大流量 Max.flow rate		最大扬程 Hmax.(m)	输入功率 Power (P2) KW	电压/频率 V/Hz		L mm	H mm
	lpm	m³/h			220/50	380/50		
SCA65-40-125/2.2T	583	35	28	2.2	14	4.9	815	437
SCA65-40-125/3.0T	667	40	32	3.0	/	6.3	850	437
SCA65-50-125/4.0T	917	55	28	4.0	/	5.5	888	437
SCA65-50-160/5.5T	1000	60	35	5.5	/	11.1	944	437
SCA80-65-125/7.5T	2000	120	32	7.5	/	14.9	988	437
SCA80-65-125/9.2T	2083	125	34	9.2	/	18.3	1056	437
SCA100-80-160/11T	3000	180	30	11.0	/	21.2	1142	487
SCA100-80-160/15T	3000	180	36	15.0	/	28.6	1184	487

泳池水质智能管家

Pool Intelligent Management System

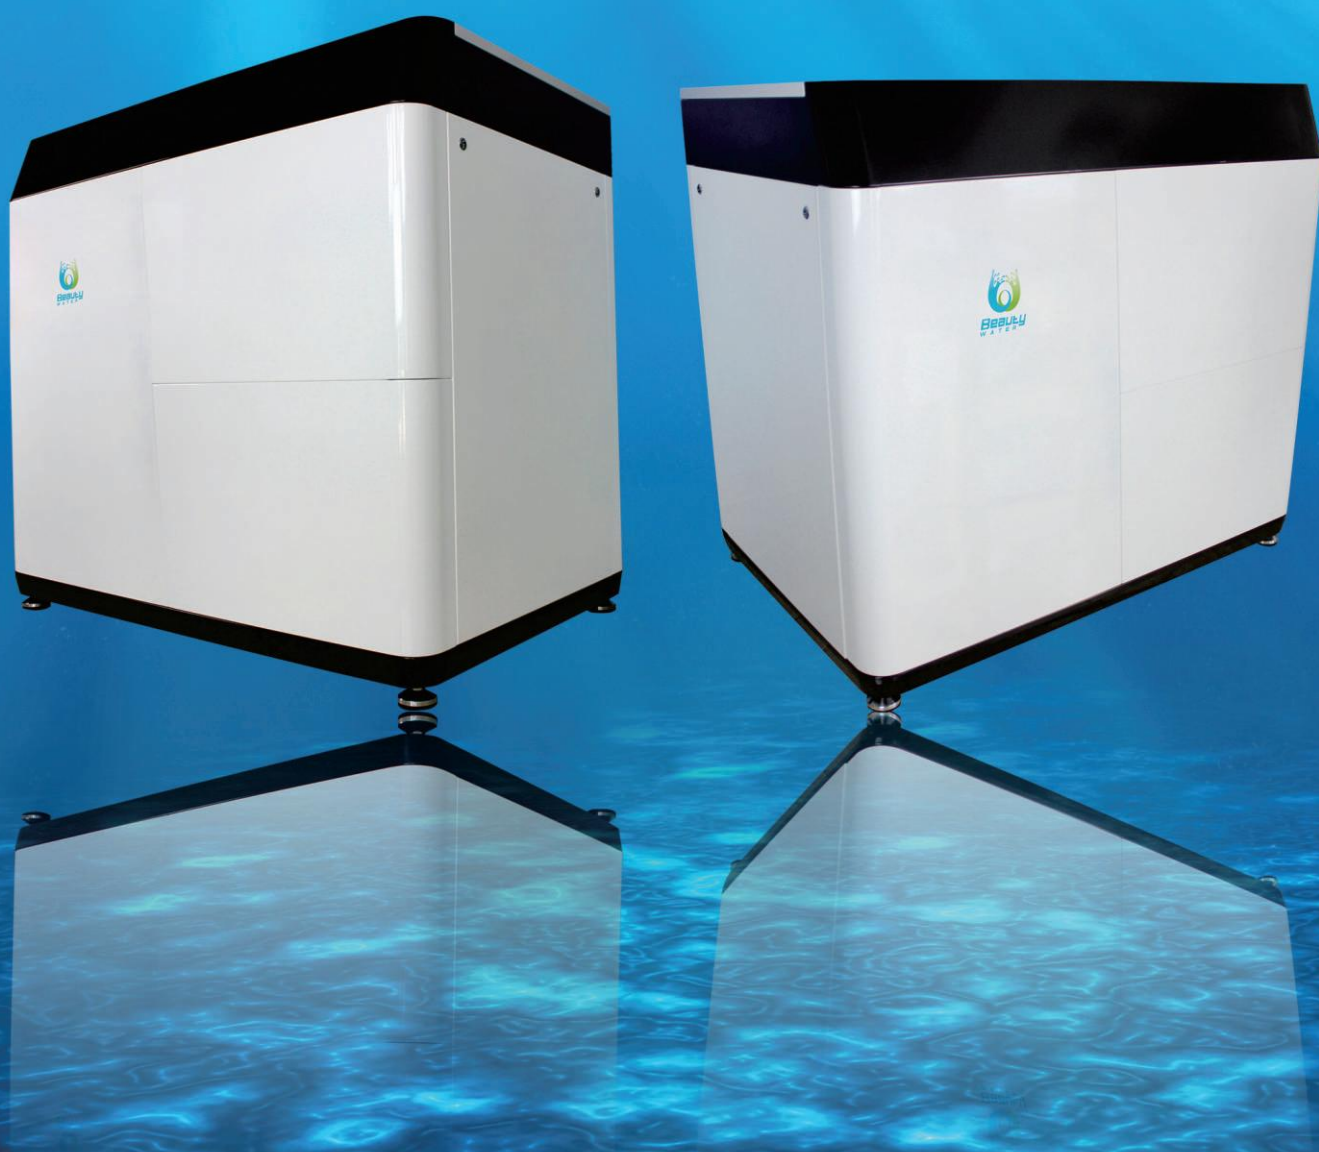



泳池水质智能管家 Pool Intelligent Management System



特点 & 优势 Features & Advantages

- | | |
|--|--|
| ① 水质保护： 国际规范、预滤节水、科学消毒、自动过滤 | Guaranteed water quality: Compliance with nation standards, First-of-a-kind pre-filtration and water-conservative application, Scientific sterilization, Automatic filtration. |
| ② 人工智能： 一屏掌控、远程控制、丰富光效、水温控制（选配） | Artificial Intelligence: All-in-one screen, Remote control, Abundant luminous effects, Alarm detection, Heating (optional). |
| ③ 高效节能： 节约40%用水、节约30%用电、节约投药、节约人力 | Energy Efficiency: 40% watersaving, 30% electricity saving, Dosing saving, labor saving. |

技术参数 Specification

型号 Model	设备尺寸 Equipment Size (mm)	电压 Voltage	功率 Power	流量 Flow rate
BW-P1	1200*900*1125	AC380V	2.3KW	13m ³ /h
BW-C1	1450*960*1362	AC380V	3.1KW	28m ³ /h





水下灯 Underwater Lights

产品亮点:




1. 采用独特的防水结构和工艺，具有快速散热和长寿命的特点。
我们提供单色、七彩和多色混合的定制方案，为您的泳池增添绚丽色彩，独树一帜。
2. 安装方式灵活多样，适合壁挂式、嵌入式、混凝土池、胶膜池和玻璃钢池，确保最佳兼容性。
3. 支持多种RGB/RGBW控制方式，包括ON/OFF开关控制、遥控控制、控制盒控制以及WiFi控制。
4. 产品认证齐全，符合CE、RoHS、IECEE和ETL标准。

Features & Advantages:

1. We utilize a unique waterproof structure and technology, ensuring rapid heat dissipation and long life span. We offer customizable options in single color, RGB and multi-color combinations, making your pool vibrant and distinctive.
2. Our installation methods are versatile, compatible with wall-mounted, embedded, concrete pools, liner pools and fiberglass pools, ensuring optimal adaptability.
3. We provide a variety of RGB/RGBW control options, including ON/OFF switch control, remote control, control box control and WiFi control to meet all your needs.
4. Our products are fully certified with CE, RoHS, IECEE and ETL standards.

WPA/B系列PAR56灯泡

WPA/B Series PAR56 bulb



WPA Series

WPB Series



超声波焊接
Ultrasonic melting



胶水细节
Glue craft



ABS+PC材质
ABS + PC body



材料熔化
Material melting

特点 & 优势 Features & Advantages

① 材质:ABS+PC

Material : ABS+PC.

② 超声波焊接

Ultrasonic welding.

③ 环氧树脂胶,抗腐蚀


Epoxy glue, corrosion resistant.

④ 特殊的热传导,寿命长



Special heat conduction, long life.

WPA/B系列PAR56灯泡


WPA/B Series PAR56 bulb

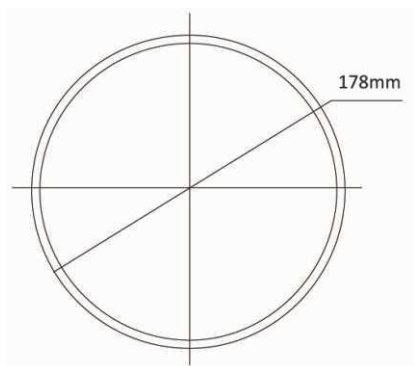

WPA Series

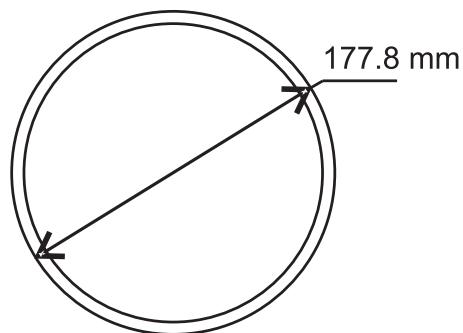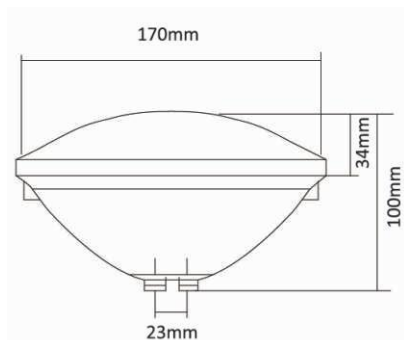

WPB Series

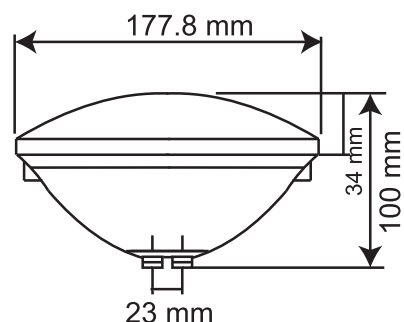

产品参数 Product Parameters

型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明		
					暖白 WW	正白 WHT	彩光 RGB
WPA/B-180	AC12V	12W	SMD2835	180pcs	1100lm	1200lm	600lm
WPA/B-252	AC12V	18W	SMD2835	252pcs	1700lm	1800lm	900lm
WPA/B-351	AC12V	25W	SMD2835	351pcs	2400lm	2500lm	1200lm
WPA/B-150	AC12V	35W	SMD5050	150pcs	3100lm	3200lm	1600lm



备注：RGB控制方式：A.开/关 B.远程遥控器（R15&R18）

DW 控制方式：A.开/关 B.远程遥控器（R8）

Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)

DW control way A. On/Off control B. Remote control(R8)

WPS系列灌胶灯盘 WPS Series Epoxy Resin LED panel

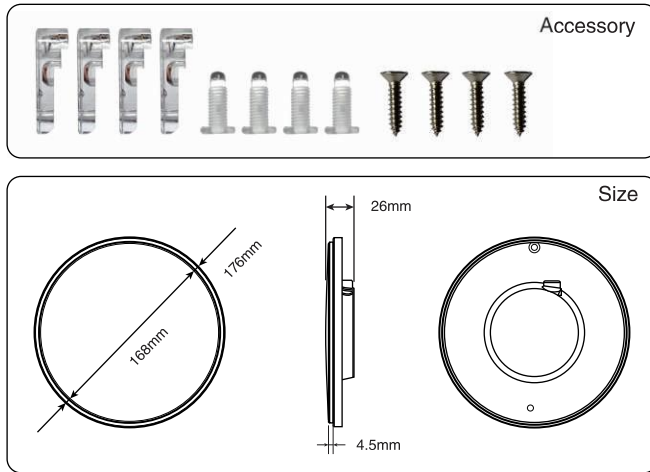

特点 & 优势 Features & Advantages

- | | |
|----------------------------|---|
| ① 材质:ABS+PC | Material : ABS+PC |
| ② 结构:特殊防水设计 | Structure : Special design for waterproof |
| ③ 工艺:填充环氧树脂, 防水等级: IP68 | Craft : Filled with epoxy resin, IP68 |
| ④ 高品质贴片LED SMD2835/SMD5050 | LED : high quality SMD2835 / SMD5050 |

产品参数 Product Parameters

型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明			
					正白 WHT	正白/暖白 DW	彩光 RGB	RGB白光 RGBW
WPS-252	AC12V / DC12V	18W	SMD2835	252pcs	1800lm	/	900lm	/
WPS-351	AC12V / DC12V	25W	SMD2835	351pcs	2500lm	/	1200lm	/
WPS-441	AC12V / DC12V	32W	SMD2835	441pcs	3200lm	/	1600lm	/
WPS-513	AC12V / DC12V	40W	SMD2835	513pcs	4000lm	/	2000lm	/
WPS-90	AC12V / DC12V	18W	SMD5050	90pcs	/	1900lm	900lm	/
WPS-120	AC12V / DC12V	25W	SMD5050	120pcs	/	2600lm	1200lm	/
WPS-150	AC12V / DC12V	32W	SMD5050	150pcs	/	3300lm	1600lm	/
WPS-180	AC12V / DC12V	40W	SMD5050	180pcs	/	/	/	2100lm

备注: RGB控制方式: A.开/关 B.远程遥控器 (R15&R18)
DW 控制方式: A.开/关 B.远程遥控器 (R8)

Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)
DW control way A. On/Off control B. Remote control(R8)

如何更换PAR56(A)

How to replace PAR56 (A)



① 拆下灯座，将环氧LED面板放入灯架内。

Remove the lamp holder, put the epoxy LED panel in the frame.

② 固定螺丝，调整螺栓以锁定面板。

Fix the screws and adjust the bolts to lock the panel.

如何更换PAR56(B)

How to replace PAR56 (B)



① 拆下灯座，将环氧LED面板放入灯架。

Remove the lamp holder, put the epoxy LED panel in the frame.

② 固定螺丝和不锈钢夹，调整螺栓以锁定面板。

Fix the screws and SS clips, adjust the bolts to lock the panel.





水下灯 Underwater Lights

www.gzbeautywater.com



BPF1003C / BPF1003V

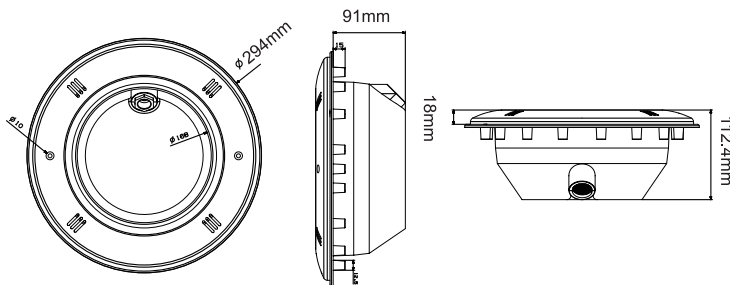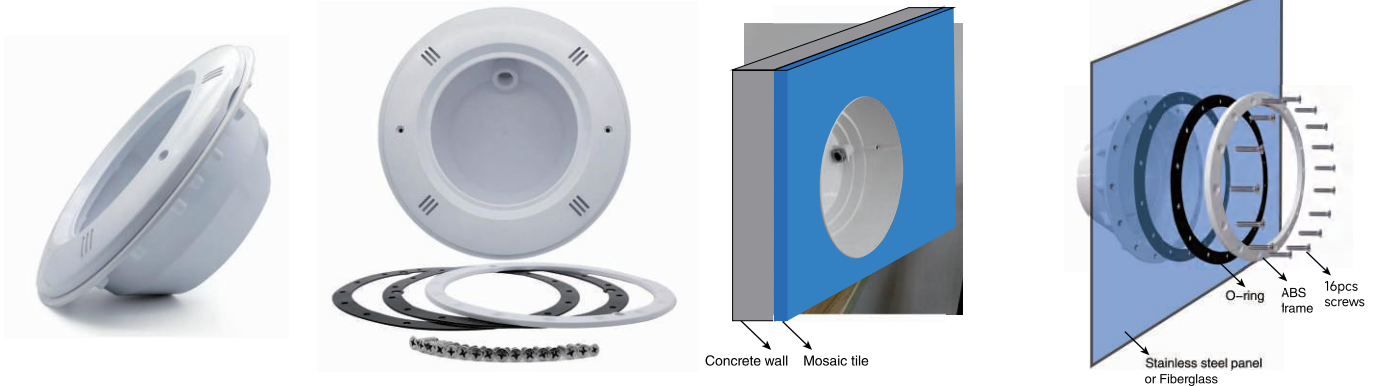

- 1 薄的预埋件节省更多的包装体积。
Shallow niche saves more packaging volume.
- 2 适用于土建池/胶膜池/玻纤泳池。
It suits for concrete pool / liner / Fiberglass pool.



土建池安装 Concrete pool installation




Cable Hose

胶膜池/玻纤池 Liner / Fiberglass pool installation

- 1 光源是环氧树脂LED面板。
The light source is Epoxy Resin LED panel.
- 2 BPF1003C 适用于土建池。
BPF1003C – for concrete pool.
- 3 BPF1003V 适用于胶膜池/玻纤泳池。
BPF1003V for liner/fiberglass pool.

BPF1004C / BPF1004V

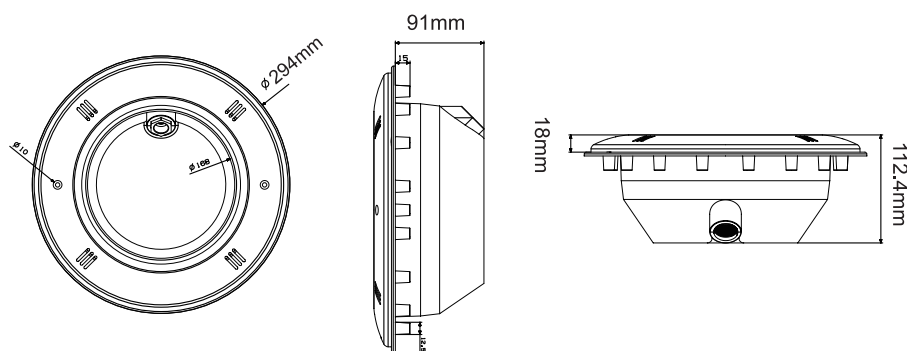

土建池安装 Concrete pool installation



胶膜池/玻纤池 Liner / Fiberglass pool installation

- ① 光源为WPA或WPB系列PAR56灯泡。
The light source is WPA or WPB PAR56 bulb.
- ② BPF1004C 适用于土建池。
BPF1004C—for concrete pool.
- ③ BPF1004V—适用于胶膜池/玻纤池。
BPF1004V—for liner / fiberglass pool.

水下灯 Underwater Lights

www.gzbeautywater.com



WPR & WPS系列壁挂胶灯

WPR & WPS Series Surface Mount Plastic Underwater Light



遥控器
R15 Controller




土建池支架 For Concrete Pool
胶膜池支架 For Liner Pool For Fiberglass Pool

特点 & 优势 Features & Advantages

- | | |
|-----------------------------|--|
| ① 材质:ABS+UV防晒 | Material : ABS+UV stabilizer |
| ② 防水等级: IP68 | Waterproof: IP68 |
| ③ 安装形式: 壁挂式 | Installation: wall mounted (flat type) |
| ④ LED光源: 高品质贴片LED, 亮度高, 能耗小 | LED type: high quality SMD LED |

产品参数 Product Parameters

型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明		
					暖白 WW	正白 WHT	彩光 RGB
WPR/S-180	AC12V	12W	SMD2835	180pcs	1100lm	1200lm	600lm
WPR/S-252	AC12V	18W	SMD2835	252pcs	1700lm	1800lm	900lm
WPR/S-351	AC12V	25W	SMD2835	351pcs	2400lm	2500lm	1200lm
WPR/S-150	AC12V	35W	SMD5050	150pcs	3100lm	3200lm	1600lm

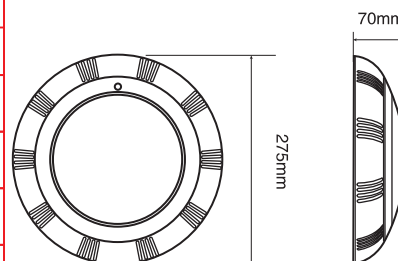

备注: RGB控制方式: A.开/关 B.远程遥控器 (R15&R18)

Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)

WPSP 系列灌胶壁挂灯 WPSP Series Epoxy Resin LED Light




遥控器
R15 Controller



土建池支架
For Concrete Pool



胶膜池支架
For Liner Pool
For Fiberglass Pool

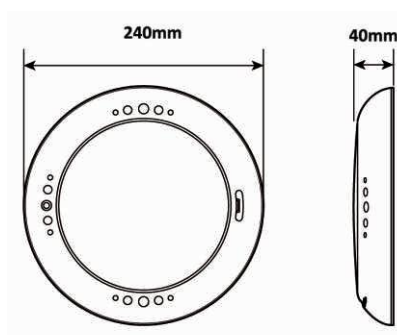

特点 & 优势 Features & Advantages

- | | |
|---------------------------|--|
| ① 磨砂半透明PC罩 | PC housing, hollow |
| ② 防水等级:IP68 | Waterproof: IP68 |
| ③ 安装形式:壁挂式 | Installation: wall mounted (flat type) |
| ④ LED光源:高品质贴片LED,亮度高, 能耗小 | LED type: high quality SMD LED |
| ⑤ 抗腐蚀, 寿命长 | Corrosion resistant, long life |

产品参数 Product Parameters

型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明			
					正白 WHT	正白/暖白 DW	彩光 RGB	RGB白光 RGBW
WPSP-252	AC12V/DC12V	18W	SMD2835	252pcs	1800lm	/	900lm	/
WPSP-351	AC12V/DC12V	25W	SMD2835	351pcs	2500lm	/	1200lm	/
WPSP-441	AC12V/DC12V	32W	SMD2835	441pcs	3200lm	/	1600lm	/
WPSP-513	AC12V/DC12V	40W	SMD2835	513pcs	4000lm	/	2000lm	/
WPSP-90	AC12V/DC12V	18W	SMD5050	90pcs	/	1900lm	900lm	/
WPSP-120	AC12V/DC12V	25W	SMD5050	120pcs	/	2600lm	1200lm	/
WPSP-150	AC12V/DC12V	32W	SMD5050	150pcs	/	3300lm	1600lm	/
WPSP-180	AC12V/DC12V	40W	SMD5050	180pcs	/	/	/	2100lm

备注: RGB控制方式: A.开/关 B.远程遥控器 (R15&R18)

DW 控制方式: A.开/关 B.远程遥控器 (R8)

Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)

DW control way A. On/Off control B. Remote control(R8)

水下灯 Underwater Lights

www.gzbeautywater.com



WPSA 系列灌胶挂壁灯

WPSA Series Epoxy Resin LED Light



遥控器
R15 Controller



土建池支架
For Concrete Pool

胶膜池支架
For Liner Pool
For Fiberglass Pool

特点 & 优势 Features & Advantages

- | | |
|--|--|
| ① 防紫外线ABS外壳，多种颜色可选 | UV ABS housing , with different colors. |
| ② 多种安装方法 | Multiple installation methods. |
| ③ 环氧树脂填充面板，防水等级IP68 | Epoxy resin filled panel, IP68. |
| ④ 高品质贴片5050LED，正白和暖白可调
3合1 LED具有更好的混光效果 | SMD5050 LED, WW&WHT dimmable.
3-in-1 LED has better mixed color effect. |

产品参数 Product Parameters


型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明			RGB白光 RGBW
					正白 WHT	正白/暖白 DW	彩光 RGB	
WPSA-252	AC12V/DC12V	18W	SMD2835	252pcs	1800lm	/	900lm	/
WPSA-351	AC12V/DC12V	25W	SMD2835	351pcs	2500lm	/	1200lm	/
WPSA-441	AC12V/DC12V	32W	SMD2835	441pcs	3200lm	/	1600lm	/
WPSA-513	AC12V/DC12V	40W	SMD2835	513pcs	4000lm	/	2000lm	/
WPSA-90	AC12V/DC12V	18W	SMD5050	90pcs	/	1900lm	900lm	/
WPSA-120	AC12V/DC12V	25W	SMD5050	120pcs	/	2600lm	1200lm	/
WPSA-150	AC12V/DC12V	32W	SMD5050	150pcs	/	3300lm	1600lm	/
WPSA-180	AC12V/DC12V	40W	SMD5050	180pcs	/	/	/	2100lm

备注：RGB控制方式：A.开/关 B.远程遥控器（R15&R18）

DW 控制方式：A.开/关 B.远程遥控器（R8）

Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)


DW control way A. On/Off control B. Remote control(R8)

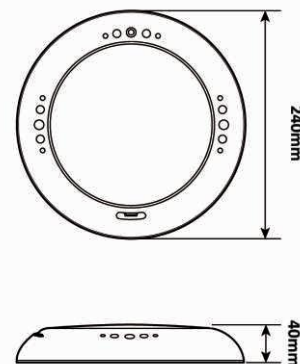

BW3010 系列矩形泳池灯

BW3010 Series Rectangular Pool Light

ABS框架 ABS Frame

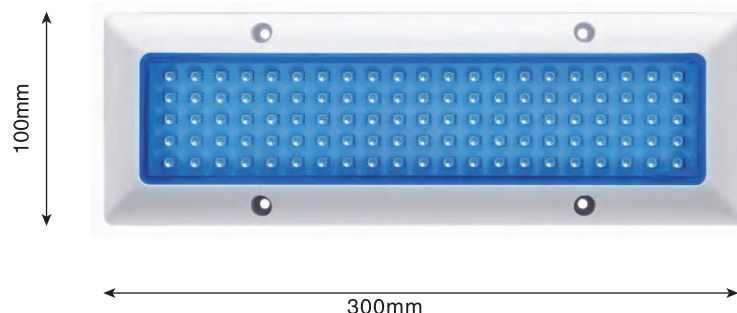

土建池 Concrete Pool



玻纤池 Fiberglass Pool



特点 & 优势 Features & Advantages

- | | |
|---------------------|--|
| ① 独特的矩形造型 | Distinctive rectangular shape |
| ② 多种安装方式 | Multiple installation methods |
| ③ 三合一LED具有良好的混光效果 | Three-in-one LED has a good mixed color effect |
| ④ 环氧树脂填充面板，防水等级IP68 | Epoxy resin filled panel, IP68 |

产品参数 Product Parameters

型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明			
					正白 WHT	正白/暖白 DW	彩光 RGB	RGB白光 RGBW
BW3010-75	AC12V/DC12V	15W	SMD5050	75pcs	1500lm	1300lm	700lm	/
BW3010-105	AC12V/DC12V	21W	SMD5050	105pcs	2100lm	1800lm	1000lm	/

备注: RGB控制方式: A.开/关 B.远程遥控器 (R15&R18)
DW 控制方式: A.开/关 B.远程遥控器 (R8)

Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)
DW control way A. On/Off control B. Remote control(R8)

水下灯 Underwater Lights

www.gzbeautywater.com



WPSS 系列不锈钢灌胶壁挂灯

WPSS Series Stainless Steel Epoxy Resin LED Light



特点 & 优势 Features & Advantages

- | | |
|-------------------|---------------------------------------|
| ① 不锈钢316L外框 | Stainless steel 316L frame |
| ② 适用于土建池，配有BRT005 | Suits for concrete pool , with BRT005 |
| ③ 环氧树脂填充面板，IP68 | Epoxy resin filled panel, IP68 |

产品参数 Product Parameters

型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明			
					正白 WHT	正白/暖白 DW	彩光 RGB	RGB白光 RGBW
WPSS-252	AC12V/DC12V	18W	SMD2835	252pcs	1800lm	/	900lm	/
WPSS-351	AC12V/DC12V	25W	SMD2835	351pcs	2500lm	/	1200lm	/
WPSS-441	AC12V/DC12V	32W	SMD2835	441pcs	3200lm	/	1600lm	/
WPSS-513	AC12V/DC12V	40W	SMD2835	513pcs	4000lm	/	2000lm	/
WPSS-90	AC12V/DC12V	18W	SMD5050	90pcs	/	1900lm	900lm	/
WPSS-120	AC12V/DC12V	25W	SMD5050	120pcs	/	2600lm	1200lm	/
WPSS-150	AC12V/DC12V	32W	SMD5050	150pcs	/	3300lm	1600lm	/
WPSS-180	AC12V/DC12V	40W	SMD5050	180pcs	/	/	/	2100lm

备注：RGB控制方式：A.开/关 B.远程遥控器 (R15&R18)

DW 控制方式：A.开/关 B.远程遥控器 (R8)

Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)

DW control way A. On/Off control B. Remote control(R8)

WSSA 系列不锈钢灌胶壁挂灯

WSSA Series Stainless Steel Epoxy Resin LED Light




特点 & 优势 Features & Advantages

- | | |
|-----------------------|---|
| ① 不锈钢316L框架，厚度 2mm | Stainless steel 316L frame, thickness 2mm |
| ② 使用两颗螺丝快速安装，无需支架 | Fast installation with two pcs screws, without bracket |
| ③ 不同的金属表面处理工艺，拉丝和镜面抛光 | Different metal surface treatment processes, wire drawing & mirror polish |
| ④ 环氧树脂填充面板，IP68 | Epoxy resin filled panel, IP68 |

产品参数 Product Parameters

型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明			
					正白 WHT	正白/暖白 DW	彩光 RGB	RGB白光 RGBW
WSSA-252	AC12V	18W	SMD2835	252pcs	1800lm	/	900lm	/
WSSA-351	AC12V	25W	SMD2835	351pcs	2500lm	/	1200lm	/
WSSA-441	AC12V	32W	SMD2835	441pcs	3200lm	/	1600lm	/
WSSA-513	AC12V	40W	SMD2835	513pcs	4000lm	/	2000lm	/
WSSA-90	AC12V	18W	SMD5050	90pcs	/	1900lm	900lm	/
WSSA-120	AC12V	25W	SMD5050	120pcs	/	2600lm	1200lm	/
WSSP-150	AC12V	32W	SMD5050	150pcs	/	3300lm	1600lm	/
WSSP-180	AC12V	40W	SMD5050	180pcs	/	/	/	2100lm


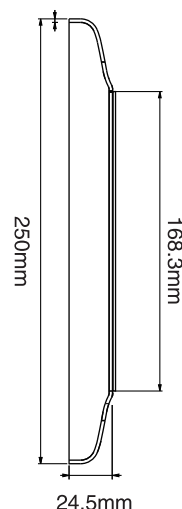


备注：RGB控制方式：A.开/关 B.远程遥控器 (R15&R18)

Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)

BM1003 系列迷你灯

BM1003 Series Mini Light

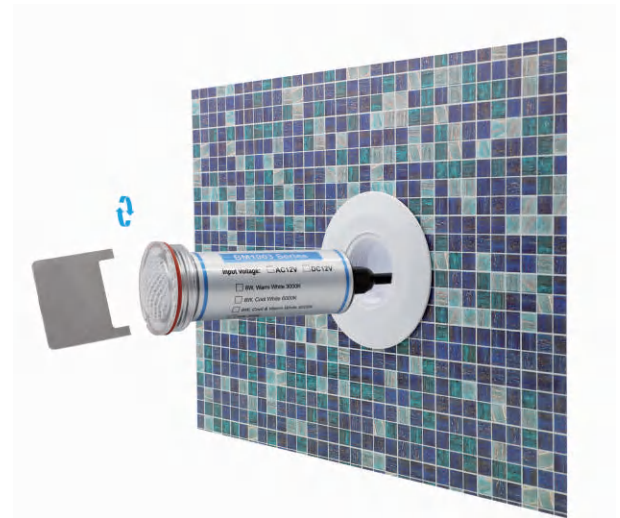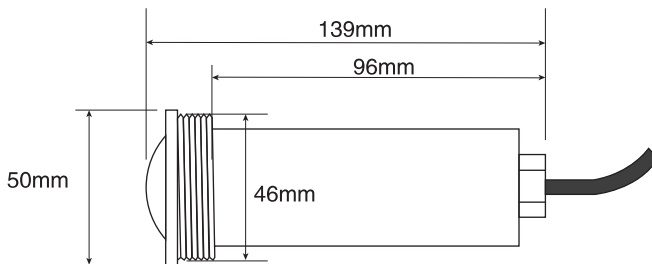

特点 & 优势 Features & Advantages

- 1 ABS框架
- 2 高质量贴片SMD3535LED，颜色混合得更好
- 3 多种安装方式 适用于土建池，可安装在有预埋件或无预埋件的情况下
- 4 填充有环氧树脂，防水等级 IP68

- ABS frame
- SMD3535 LED, color mixed better
- Multiple installation methods for concrete, W/WO niche
- Filled with epoxy resin, IP68

产品参数 Product Parameters

型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明			
					正白 WHT	正白/暖白 DW	彩光 RGB	RGB白光 RGBW
BM1003-6	AC12V	6W	SMD3535	3pcs	700lm	400lm	250lm	/
BM1003-12	AC12V	12W	SMD3535	3pcs	/	/	/	500lm

备注：RGB控制方式：A.开/关 B.远程遥控器 (R15&R18)


Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)

BM1004 系列SPA灯 BM1004 Series SPA Light




特点 & 优势 Features & Advantages

- | | |
|-------------------------------|--|
| ① 环氧树脂填充，防水等级IP68 | Filled with epoxy resin, IP68 |
| ② 不同材质的框架，PC/ABS/SS316L | Different materials for frame, PC/ABS/SS316L |
| ③ 多种安装方式 | Multiple installation methods |
| ④ 高质量贴片SMD5050 LED具有更好的灯光混合效果 | SMD5050 LED has better color mixing effect |

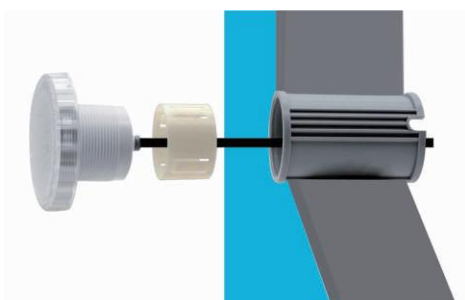

土建池 Concrete Pool

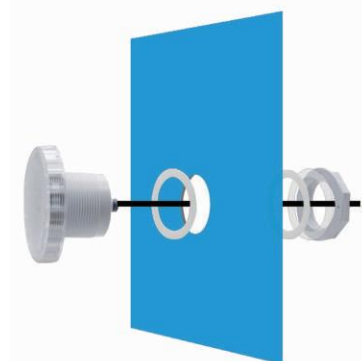

胶膜池 Liner / Fiberglass Pool

产品参数 Product Parameters

型号 Model	电压 Volt	瓦数 Power	灯珠型号 LED	灯珠数量 Qty	Lumens 流明			
					正白 WHT	正白/暖白 DW	彩光 RGB	RGB白光 RGBW
BM1004-36	AC12V	5W	SMD5050	36pcs	500lm	/	250lm	/
BM1004-54	AC12V	8W	SMD5050	54pcs	800lm	/	400lm	/

备注：RGB控制方式：A.开/关 B.远程遥控器 (R15&R18)

Remarks: RGB control way A. On/Off control B. Remote control(R15& R18)

开/关控制 ON/OFF Control



15种灯光程序
15 Color Programs

- 1 静态蓝光 Static Blue
- 2 静态红光 Static Red
- 3 静态绿光 Static Green
- 4 静态红蓝光 Static Red/Blue
- 5 静态蓝绿光 Static Blue/Green
- 6 静态红绿光 Static Red/Green
- 7 静态白光 Static White
- 8 动态循环：红-红/绿-绿 Cycle Red-Red/Green-Green
- 9 动态循环：绿-绿/蓝-蓝 Cycle Green-Green/Blue-Blue
- 10 动态循环：红-红/蓝-蓝 Cycle Red-Red/Blue-Blue
- 11 动态循环：红-绿-蓝，快速至慢速 Cycle Red-Green-Blue, Speed from fast to low.
- 12 同程序11，速度更慢 Same as program 11, the speed is slower.
- 13 动态循环：绿-红/蓝-蓝-红-白-蓝/绿-红/绿
Cycle Green-Red/Blue-Blue-Red-White-Blue/Green-Red/Green
- 14 动态循环所有光色 Cycle gradual change of all colors.
- 15 动态循环 红-绿-蓝 Cycle gradual change of Red-Green-Blue

操作流程

Operation

Suitable for CB006 / CB008 /CB004-1000W

切换颜色： Changing colors:

关闭灯具并在0-3秒内重新开。

Turn the lamps OFF and quickly back ON (0-3 seconds).

多灯同步设置： Synchronizing multiple lamps:

1. 所有灯具需连接至同一变压器； All lamps need to be connected to the same transformer.
2. 关闭灯具并在4-30秒内重新开启 Turn the lamps OFF and back ON within 4-30 seconds.
3. 所有灯具将恢复至初始程序（固定蓝色） All the lamps back to first program (fixed blue).

记忆当前颜色： Memorizing the last color:

选择所需颜色后，关闭灯具超过34秒，所选颜色即被保存。

Select the desired color, turn OFF the lamps more than 34 seconds, the chosen color. has now been memorized.

远程控制 Remote Control

A-13 灯光程序 A-13 Color Programs

- 1 开 ON
- 2 关 OFF
- 3 静态蓝光 Static Blue
- 4 静态红光 Static Red
- 5 静态绿光 Static Green
- 6 静态红蓝光 Static Red/Blue
- 7 静态蓝绿光 Static Blue/Green
- 8 静态红绿光 Static Red/Green
- 9 静态白光 Static White
- 10 动态循环：红-红/绿-绿 Cycle Red-Red/Green-Green
- 11 动态循环：绿-绿/蓝-蓝 Cycle Green-Green/Blue-Blue
- 12 动态循环：红-红/蓝-蓝 Cycle Red-Red/Blue-Blue
- 13 动态循环：红-绿-蓝，快速至慢速 Cycle Red-Green-Blue, Speed from fast to low.
- 14 动态循环：绿-红/蓝-蓝-红-白-蓝/绿-红/绿
Cycle Green-Red/Blue-Blue-Red-White-Blue/Green-Red/Green
- 15 动态循环所有光色 Cycle gradual change of all colors.

R15



(控制距离最大100米)
(Controlling Distance Max 100M)

操作流程 Operation

切换颜色 Changing colors:

按键3~15：每个按键对应一种灯光程序，按下即可切换。
Button 3-15, each button is one program.


多灯同步 Synchronizing multiple lamps:

长按任意按键，直到所有灯具切换至同一程序，即可完成同步。
Press one button until all the lamps change to the same program.

记忆最后颜色 Memorizing the last color:

选择所需颜色后，关闭电源，再次开启时灯具将自动记忆该颜色。
Select the desired color, turn OFF the lamps, the chosen color has now been memorized.

使用超外差远程控制器，并结合水面信号终端，可实现所有灯具的精准同步控制。
Superhet Remote controller + Signal terminal out of water = Perfect Synchronization

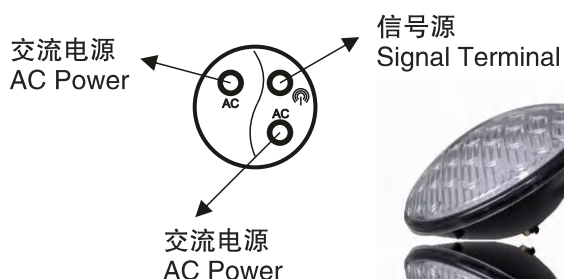

信号线(黄绿色电线)
Signal wire(G&Y cable)



蓝色和棕色电线属于电源线
Blue and brown wire are AC power

For PAR56 bulb

适用于所有壁挂灯
For wall mounted lamp

水下灯 Underwater Lights

www.gzbeautywater.com



控制盒


Control Box



型号: CB004-1000W
尺寸: 220*140*75mm
4个接口接通终端, 最大为1000W

Model: CB004-1000W
Size: 220*140*75mm
4 connect terminals, max 1000W.

如何将灯与控制盒接通? How to connect the lamps with the CB box?

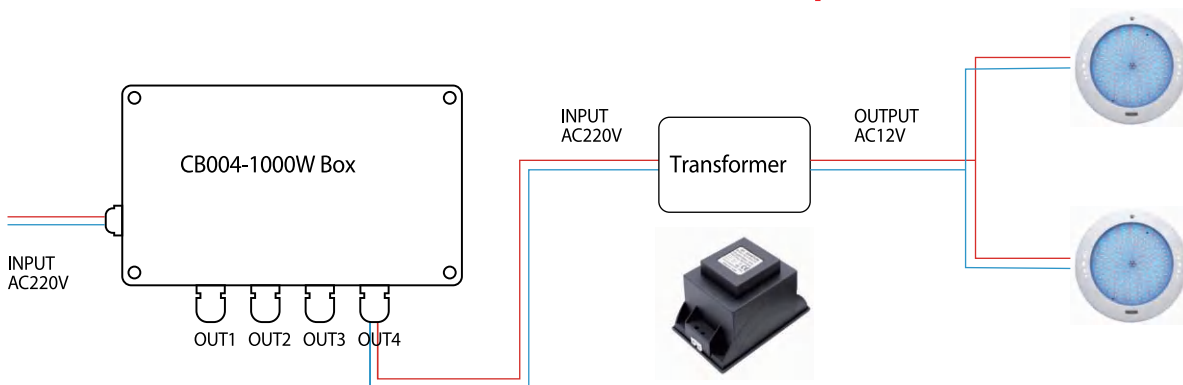

- 1 可完全同步连接所有灯;
- 2 15款灯光颜色模式, 满足个人的享受;
- 3 手持远程遥控器可离控制盒30-50米远;
- 4 此迷你盒子必须与磁性变压器(AC220V)相连;
- 5 您可以通过主开关或遥控器来改变灯光颜色。

Connecting all lights absolutely synchronized.
15 color models to meet personal enjoyment.
Handle remote controller can be 30-50 meters far from the control box.
This MINI box must be connected with the magnetic transformer(AC220V).
You can change the lamps' color by main switch or remote controller.

产品参数 Product Parameters

图片 Photo	型号 Model	输入功率 Input	瓦数 Power	安装位置 Position	可控制灯的数量 Connect lamp qty	
	CB004-1000W	AC 220V	1000W	在变压器前面 Before the Transformer	RGB 12W	60pcs
					RGB 18W	50pcs
					RGB 25W	30pcs
					RGB 32W	25pcs
					RGB 40W	20pcs

控制盒 Control Box



型号: CB006
尺寸: 150*105*70mm
6个接口接通终端, 最大为120W
Model: CB006
Size: 150*105*70mm
6 connect terminals, max 120W.




远程遥控器
Remote controller



型号: CB008
尺寸: 185*175*110mm
8个接口接通终端, 最大为300W.
Model: CB008
Size: 185*175*110mm
8 connect terminals, max 300W.

如何将灯与控制盒接通? How to connect the lamps with the CB box ?

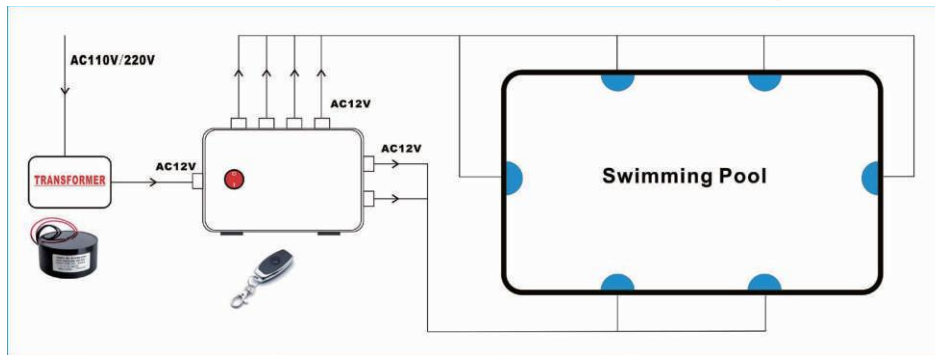

- 1 可完全同步连接所有灯;
- 2 15款灯光颜色模式, 满足个人的享受;
- 3 手持远程遥控器可离控制盒30-50米远;
- 4 此迷你盒子必须与磁性变压器(AC12V)相连;
- 5 您可以通过主开关或遥控器来改变灯光颜色。

Connecting all lights absolutely synchronized.
15 color models to meet personal enjoyment.
Handle remote controller can be 30-50 meters far from the control box.
This MINI box must be connected with the magnetic transformer(AC12V).
You can change the lamps' color by main switch or remote controller.

产品参数 Product Parameters

图片 Photo	型号 Model	输入功率 Input	瓦数 Power	安装位置 Position	可控制灯的数量 Connect lamp qty	
	CB006	AC12V	120W	在变压器后面 After the Transformer	RGB 12W	6pcs
					RGB 18W	5pcs
					RGB 25W	4pcs
					RGB 32W	3pcs
	CB008	AC12V	300W	在变压器后面 After the Transformer	RGB 12W	8pcs
					RGB 18W	8pcs
					RGB 25W	8pcs
					RGB 32W	6pcs
					RGB 40W	6pcs

变压器

Transformers



欧标
European Standard

型号 Model	瓦数 Power	描述 Description	
T3000-50W-EU	50W	防水等级 IP68	Waterproof IP68
T3000-100W-EU	100W	欧标插头	With European plug
T3000-150W-EU	150W	输入电压：AV 220V	Input Vol.:AC 220V
T3000-300W-EU	300W	输出电压：AC 12V	Output Vol.: AC12V



美标
American Standard

型号 Model	瓦数 Power	描述 Description	
T3000-60W-US	60W	防水等级 IP68	Waterproof IP68
T3000-100W-US	100W	美标插头	With American plug
T3000-150W-US	150W	输入电压：AV 120V	Input Vol.:AC 120V
T3000-300W-US	300W	输出电压：AC 12V	Output Vol.: AC12V

配件

Accessories

BRT001	BRT002	BRT004	BRT005
			
土建池支架 Concrete pool bracket	胶膜池支架 Liner Pool/Fiberglass Pool Bracket 不锈钢池支架 Stainless Steel Pool Bracket	土建+胶膜池支架 Concrete+Liner Pool Bracket	土建池支架 Concrete pool bracket
BRT006	BRT007	BRT008	BRT009
			
土建池支架 Concrete pool bracket	胶膜池支架 Liner Pool/Fiberglass Pool Bracket 不锈钢池支架 Stainless Steel Pool Bracket	土建池支架 Concrete pool bracket	土建池支架 Concrete pool bracket
Gland001	Gland002	R15 controller	R18 controller
			
A0001	A0002	A0003	A0004
			
1.5寸出水口 1.5 inch outlet	2寸管 2.0 inch tube	2寸管+1.5寸出水口 2.0 inch tube+1.5 inch outlet	接线盒 Junction box

扶梯 *Pool Ladders*




WUS系列扶梯




WLS系列扶梯




WFS系列扶梯

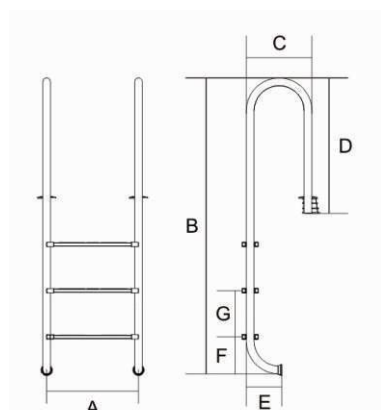

WUS系列扶梯

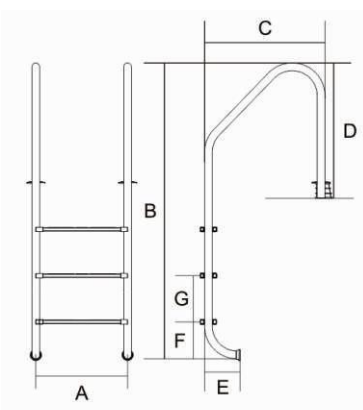

WLS系列扶梯

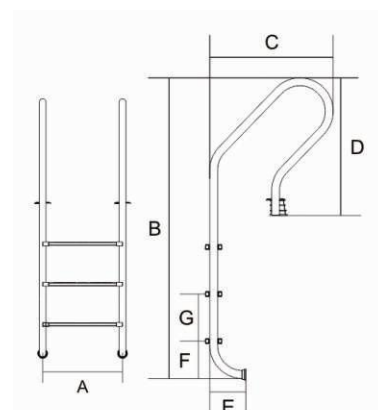

WFS系列扶梯

WUS系列扶梯 WUS series ladder

型号 Model	规格 Specification	尺寸 Dimension(mm)						
		A	B	C	D	E	F	G
WUS215	2 S.S steps ladder	493	1330	360	700	190	200	250
WUS315	3 S.S steps ladder	493	1580	360	700	190	200	250
WUS415	4 S.S steps ladder	493	1830	360	700	190	200	250
WUS515	5 S.S steps ladder	493	2080	360	700	190	200	250

WLS系列扶梯 WLS series ladder

型号 Model	规格 Specification	尺寸 Dimension(mm)						
		A	B	C	D	E	F	G
WLS215	2 S.S steps ladder	493	1320	686	788	190	200	250
WLS315	3 S.S steps ladder	493	1570	686	788	190	200	250
WLS415	4 S.S steps ladder	493	1820	686	788	190	200	250
WLS515	5 S.S steps ladder	493	2070	686	788	190	200	250

WFS系列扶梯 WFS series ladder

型号 Model	规格 Specification	尺寸 Dimension(mm)						
		A	B	C	D	E	F	G
WFS215	2 S.S steps ladder	493	1330	533	709	190	200	250
WFS315	3 S.S steps ladder	493	1580	533	709	190	200	250
WFS415	4 S.S steps ladder	493	1830	533	709	190	200	250
WFS515	5 S.S steps ladder	493	2080	533	709	190	200	250

投药器

Chemical Feeders





C100



C200


特点 & 优势 Features & Advantages

- ◎ 无需特别排气装置
- ◎ 无漏气式密封设计
- ◎ 活用式外置控制阀
- ◎ 全自动低水位设计：当水泵停止工作时，自动降低水位，以免浸泡氯丸，延长氯丸使用寿命
- ◎ 投药时，为防止过度投药，需要完全关闭控制阀和内部止回阀
- ◎ No special venting required
- ◎ Completely enclosed, no escaping gases
- ◎ Positive external no-clog control valve. Design to automatically lower the water level so tablets are not soaking during off period of pump, more efficient use of tablets
- ◎ To prevent over feeding during use, completely close the control valve and the built in check valve will prevent chemical from being fed into pool or spa



格栅地胶


Cover Grating & Floor Pad

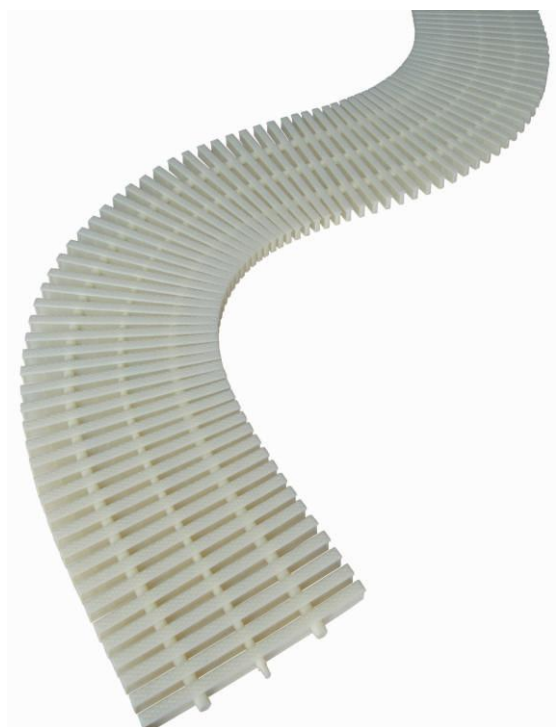


BW310




BW310

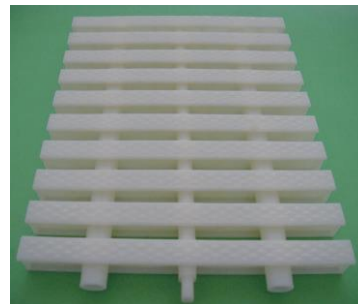

型号 Model No.	尺寸Size(CM)		
	长L	宽W	高H
BW31018	18	1.5	2.4
BW31020	20	1.5	2.4
BW31025	25	1.5	2.4
BW31030	30	1.5	2.4
BW31035	35	1.5	2.4
BW31040	40	1.5	2.4

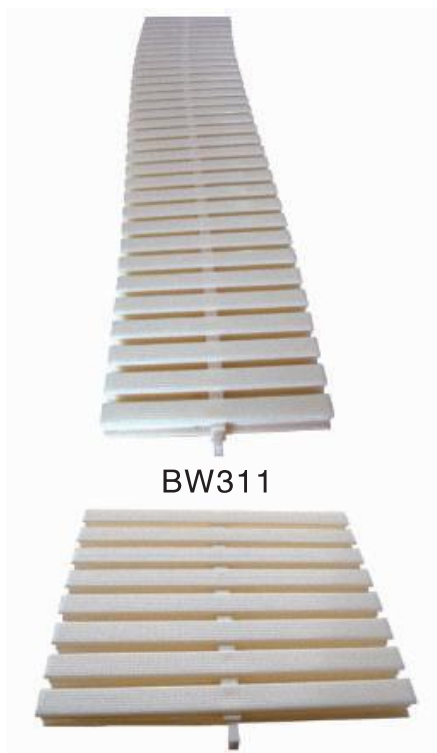

BW311

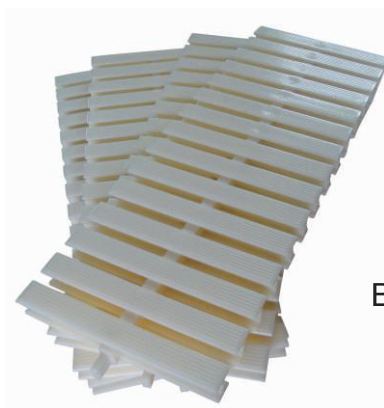

BW311


型号 Model No.	尺寸Size(CM)		
	长L	宽W	高H
BW31118	18	2.4	2.4
BW31120	20	2.4	2.4
BW31125	25	2.4	2.4
BW31130	30	2.4	2.4
BW31135	35	2.4	2.4

格栅地胶

Cover Grating & Floor Pad






BW312

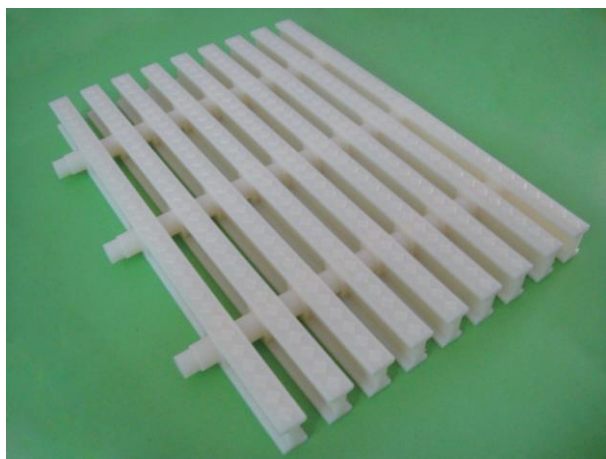


BW313

型号 Model No.	尺寸Size(CM)		
	长L	宽W	高H
BW31218	18	1.4	2.4
BW31220	20	1.4	2.4
BW31225	25	1.4	2.4
BW31330	30	1.4	2.4
BW31335	35	1.4	2.4
BW31340	40	1.4	2.4

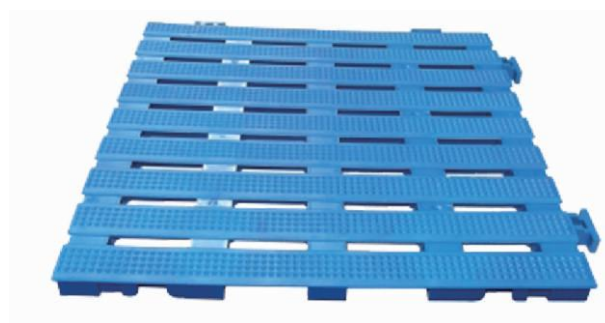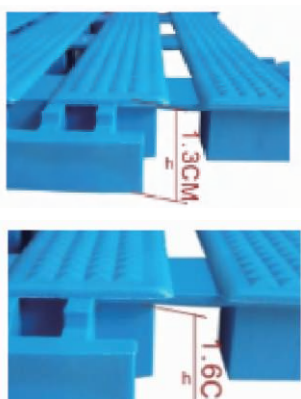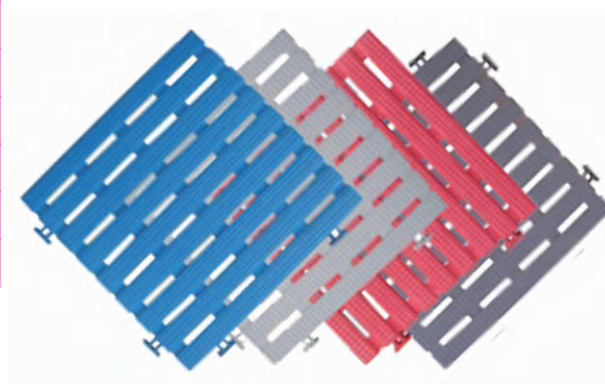

BW3030

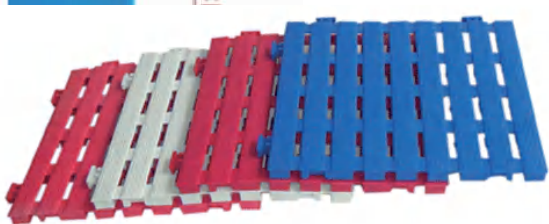

BW3030

型号 Model No.	尺寸Size(CM)		
	长L	宽W	高H
BW303016	30	30	1.6
BW303013	30	30	1.3

泳道线

The Racing Lane

BWN11



型号 Model No.	尺寸Size(CM)	
	直径Dia.(CM)	长L(M)
BWN1125	Φ 11	25
BWN1150	Φ 11	50

BWR11



型号 Model No.	尺寸Size(CM)	
	直径Dia.(CM)	长L(M)
BWR1125	Φ 11	25
BWR1150	Φ 11	50

BWS09




型号 Model No.	尺寸Size(CM)	
	直径Dia.(CM)	长L(M)
BWS0925	Φ 9	25
BWS0950	Φ 9	50




BWS12 & BWS15

型号 Model No.	尺寸Size(CM)	
	直径Dia.(CM)	长L(M)
BWS1225	Φ 12	25
BWS1250	Φ 12	50
BWS1525	Φ 15	25
BWS1550	Φ 15	50


泳池配件 Pool Fittings

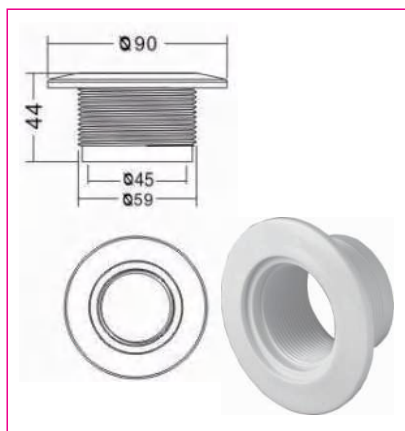


BW2022
真空吸污配件
Suction fitting

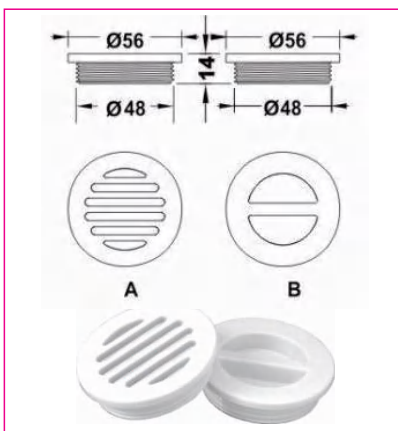


BW2022A/B
真空吸污配件面盖
Covers for suction fitting

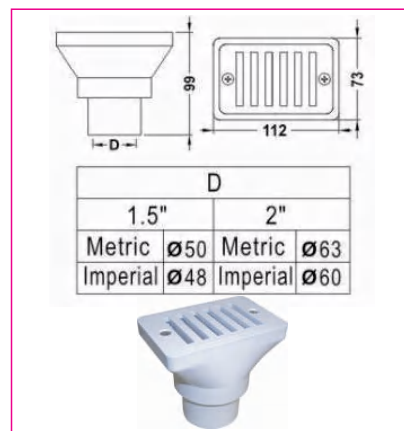

BW1019
渠盖排水器
Gutter drain

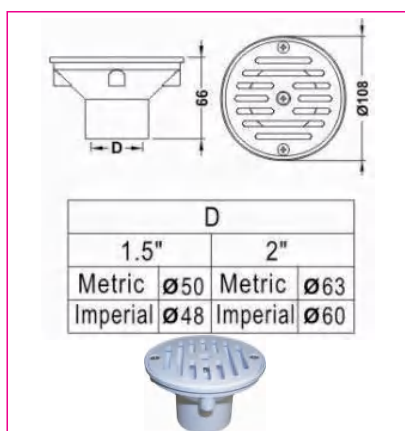


BW1424
池壁回水器
Wall return

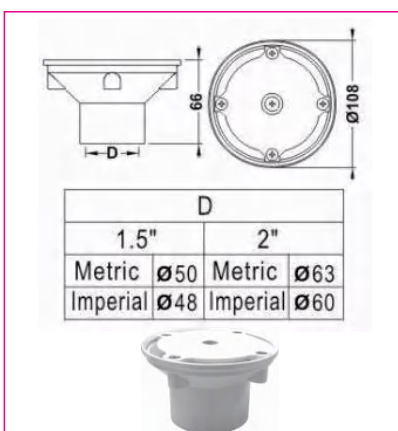

BW1425
池壁回水器
Wall return



BW1030
圆形主水器
Main drain cover

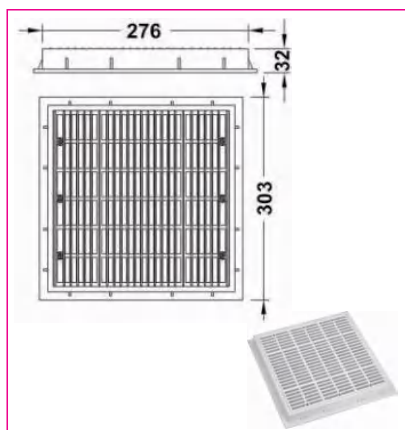

BW1032
方形主水器
Main drain cover



BW2001 标准撇渣器
Standard wall skimmer,
white color, for concrete pool using



BW2002 宽口撇渣器
Width mount wall skimmer,
white color for concrete pool using

清洁用品

Cleaning Equipment

吸池头系列 Vacuum head

BW021



特级边毛大吸池头 (内有铸铁块)
Deluxe liner vacuum head with
side brush(cast iron weighted)

BW022



特级吸池头 (内有铸铁块)
Deluxe liner vacuum head
(cast iron weighted)

BW023




三角旋转吸池头
Triangular liner vacuum head
with swivel(sand weighted)

BW024



三角透明旋转吸池头
Transparent triangular liner
vacuum head(cast iron weighted)

BW025

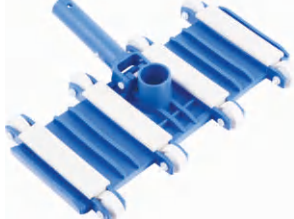

14"弹性吸池头
14" flexible vacuum head

BW026



14"弹性边毛吸池头
14" flexible vacuum head with
side brush

刷子系列 Brush

BW031



10"/26cm 高级不锈钢池刷
10"/26cm deluxe stainless
steel algae brush

BW032



18"/45cm豪华铝柄胶池刷
18"/45cm deluxe wall brush
with aluminum back

BW033



18"/45cm豪华铝柄不锈钢池刷
18"/45cm deluxe stainless steel
wall brush with aluminum back

BW034



18"/45cm标准胶池刷
18"/45cm standard curved
wall brush

BW035



10"/26cm 胶池刷
10"/26cm standard curved
wall brush

清洁用品

Cleaning Equipment

浅水叶网/深水叶网 Leaf skimmer

BW051



标准浅水叶网
Standard shallow
leaf skimmer

BW052



耐用型浅水叶网
Heavy duty shallow
leaf skimmer

BW053



经济型标准深水叶网
Standard deep leaf
skimmer

BW054



耐用型深水叶网
Heavy duty deep leaf
skimmer

温度计 Thermometer

BW061



17cm 经济型温度计
17cm economy
thermometer w/string

BW062



24cm 大温度计
24cm large thermometer
w/string

BW063



棱形浮水温度计
Deluxe floating
thermometer w/string

BW064



动物浮水温度计(金鱼 小鸭 乌龟 鲸鱼)
Floating animal thermometer
(Whale/Turtle/Duck/Gold fish
are optional)

伸缩铝杆 Poles

BW212



2X120 cm 波纹铝杆 – 0.8mm 壁厚
Aluminum telescopic ribbed pole
2X120cm–0.8mm thick/blue

BW218



2X180 cm 波纹铝杆 – 0.8mm 壁厚
Aluminum telescopic ribbed pole
2X180cm–0.8mm thick/blue

BW224



2X240 cm 波纹铝杆 – 0.8mm 壁厚
Aluminum telescopic ribbed pole
2X240cm–0.8mm thick/blue

BW310



3X100 cm 波纹铝杆 – 0.8mm 壁厚
Aluminum telescopic ribbed pole
3X100cm–0.8mm thick/blue

BW312



3X120 cm 波纹铝杆 – 0.8mm 壁厚
Aluminum telescopic ribbed pole
3X120cm–0.8mm thick/blue

BW330



3X300 cm 波纹铝杆 – 0.8mm 壁厚
Aluminum telescopic ribbed pole
3X300cm–0.8mm thick/blue

清洁用品

Cleaning Equipment

投药器和验水盒 Chemical dispenser, Test kit

BW071



7"投药器
7"chemical dispenser

BW072



9"投药器
9"chemical dispenser

BW073



5"投药器
5"chemical dispenser

BW074



二合一验水盒
(酸碱度, 余氯)
Basic PH&CL test kit

吸池喉 Vacuum hose

BW009



PE吸池喉, 38mm – 9M
PE flexible 38mm blue vacuum
hose, length: 9M

BW011



PE吸池喉, 38mm – 11M
PE flexible 38mm blue vacuum
hose, length: 11M

BW013



PE吸池喉, 38mm – 13M
PE flexible 38mm blue vacuum
hose, length: 13M

BW015




PE吸池喉, 38mm – 15M
PE flexible 38mm blue vacuum
hose, length: 15M

BW030




PE吸池喉, 38mm – 30M
PE flexible 38mm blue vacuum
hose, length: 30M

BW009V




双色 EVA吸池喉, 38mm – 9M
EVA 38mm double color hose
length: 9M

BW011V




双色 EVA吸池喉, 38mm – 11M
EVA 38mm double color hose
length: 11M

BW013V



双色 EVA吸池喉, 38mm – 13M
EVA 38mm double color hose
length: 13M

BW015V



双色 EVA吸池喉, 38mm – 15M
EVA 38mm double color hose
length: 15M



WhatsApp



WeChat

广州北沃环保科技有限公司(营销中心)
Guangzhou Beauty Water Eco-Technologies Co.,Ltd(Marketing Center)
广州市番禺区钟村镇钟屏岔路38号长华创意谷B区6栋01
#6-1st Building, Zone B, Changhua Innovation Valley, Zhongping X
Rd.38, Zhongcun Town, Panyu District, Guangzhou 511450, China.

北沃集团有限公司
Beauty Water Group Limited (HongKong Office)
香港铜锣湾轩尼诗道489号铜锣湾广场一期22楼2202室
Unit 2202, 22/f Causeway Bay Plaza I 489 Hennessy
Rd Causeway Bay HongKong.

佛山市北沃水处理设备制造有限公司(生产基地)
Foshan Beauty Water Pool Equipments Manufacturing Co.,Ltd(Manufacturing Base)
佛山市南海区里水镇麻奢村麻联路中心路口进三十米
Malian Road,Wuqun Industry Zone,Mashe Village,
Lishui Town, Nanhai District, Foshan 528244, China.

电话/Tel: +86 (0)20 3156 6806
邮箱/E-mail: sales@beauty-water.cn
网址/ Web: www.beauty-water.cn
www.gzbeautywater.com